SHEET 1 OF 1

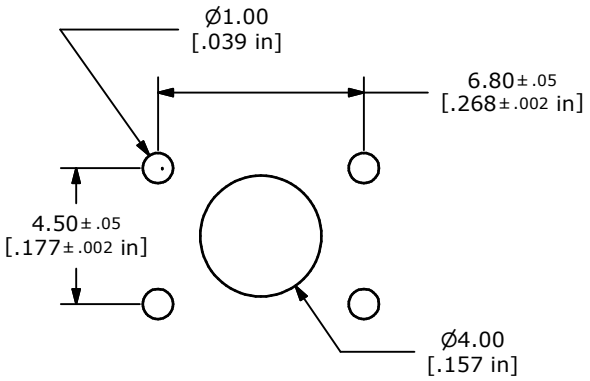

P.C. MOUNTING

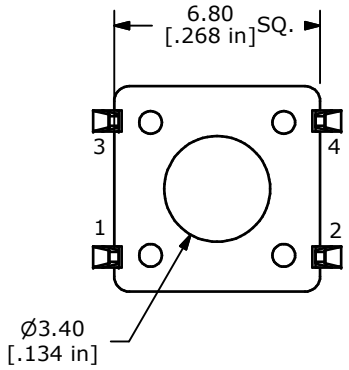



ISOMETRIC



CIRCUIT: SPST

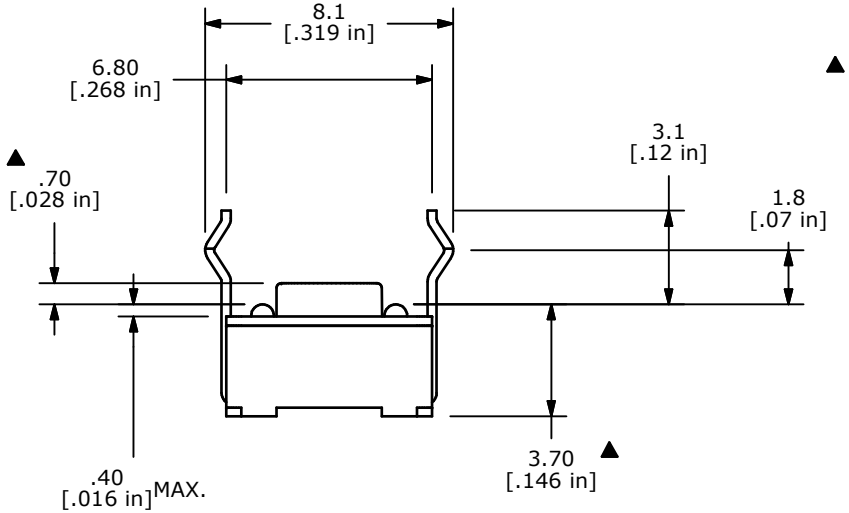

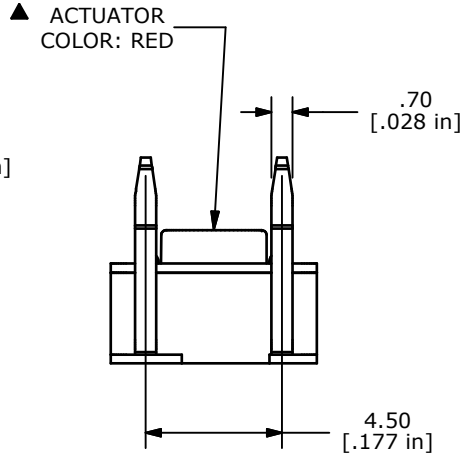

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
4. RATING: 50mA @ 12VDC
5. TRAVEL: 0.25 +0.2/-0.1
6. ▲ OPERATING FORCE: 160± 50gF
7. RETURN FORCE: 50 gF MIN.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
9. OPERATING TEMPERATURE: -20° TO +85° C
10. CONTACT RESISTANCE: 100mΩ MAX.
11. CONTACT MATERIAL: SILVER
12. ▲DENOTES CRITICAL PARAMETER
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	18261	RELEASE FOR PRODUCTION	6/25/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE	RT1105AF160Q			
SCALE 4:1	DATE 9/25/2008	DR BLR	DWG P010055	REV A