

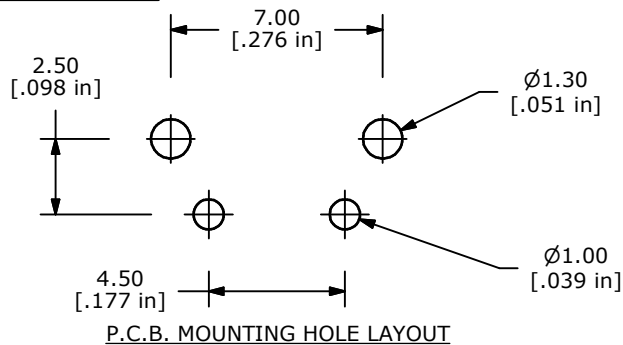
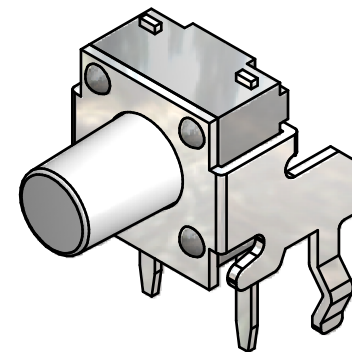


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.xx \pm 0.4$
 $x.xx \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: $0.25 \pm 0.1\text{mm}$
6. CONTACT RESISTANCE: 50m ohms max initial.MOS & TTC COMPATIBLE
7. ELECTRICAL LIFE: 5 MILLION CYCLES.
8. INSULTION RESISTANCE: 100M ohms min.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER
- ▲11. CONTACTS: SILVER
- ▲12. OPENING FORCE: 65 GRAMS
13. PACKAGE: BULK, 750 PIECES PER POLYBAG
14. 2002/95/EC (ROHS) COMPLIANT

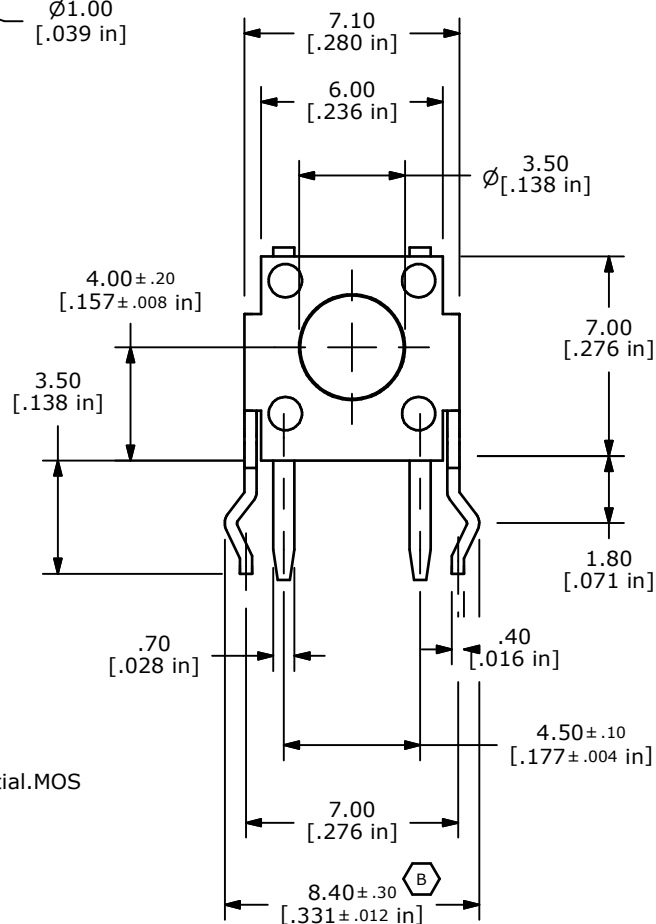

ISOMETRIC

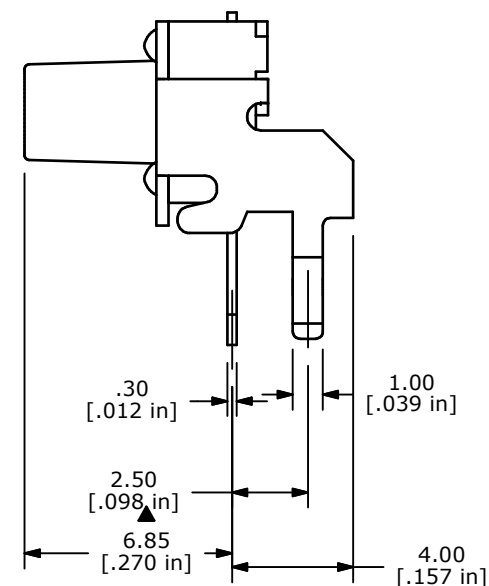

E-SWITCH®



TITLE LL1105MF065Q

SCALE 4:1

DATE 1/4/2010

DR BLR

DWG P010244

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	18742	LEG TOLERANCE WAS +/- 0.1	1/4/2010	BLR
A	16609	RELEASED FOR PRODUCTION	11/8/2006	TN
REV	PCR NO	DESCRIPTION	DATE	BY