
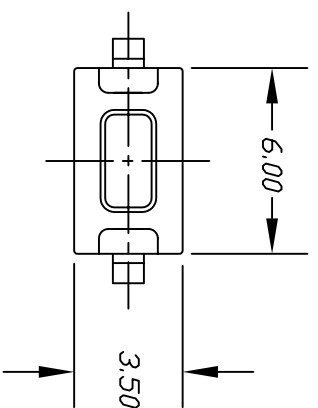
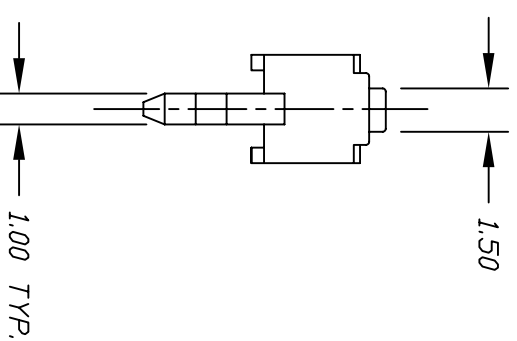


RECOMMEND P.C.B. HOLES

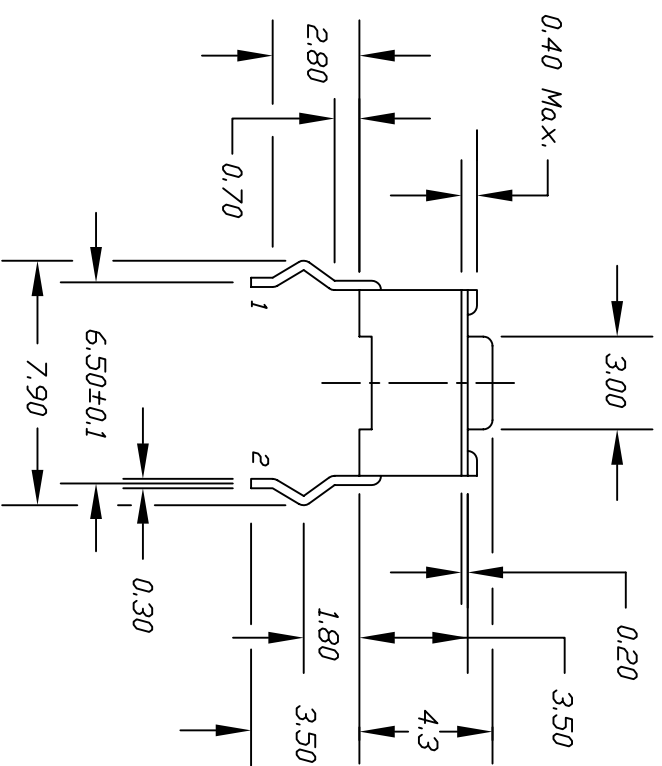

CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [IN]
2. TERM. NDS. FOR REF ONLY
3. RATING: DC 12V, 50mA
4. TRAVEL: $0.25 \pm 0.1mm$
5. CONTACT RESISTANCE: $100m\ \Omega_{max}$
6. MECHANICAL/ELECTRICAL LIFE: 30,000 CYCLES
7. PACKAGE: BULK 1,000 PER BAG
8. 2002/95/EC (ROHS) COMPLIANT

C		UPDATED NOTES		11/7/06		TN	
B		REVISED & REDRAWN					
REV.		DESCRIPTION		DATE		CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED							
TOLERANCES							
0.0				±0.4			
0.00				±0.25			
TITLE TL1107AF260W E-SWITCH®							
SCALE		DATE		DR		DWG	
4:1		11/7/06		TN		P010313	
						REV	
						C	