

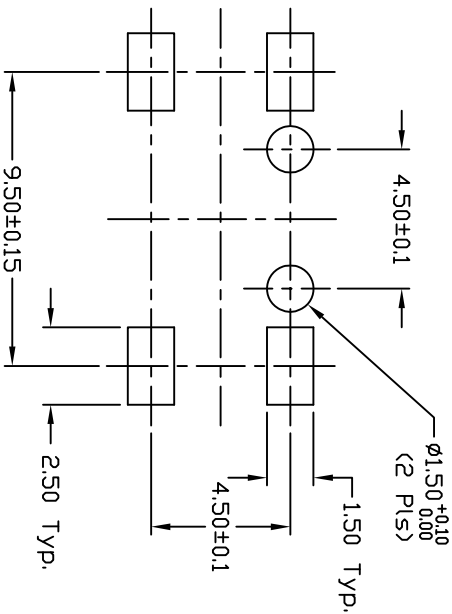
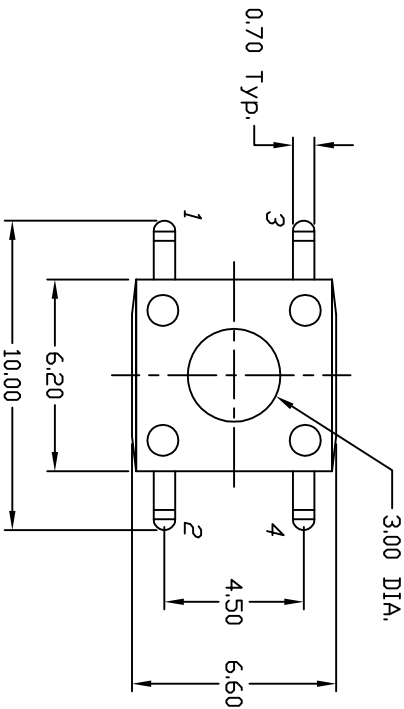

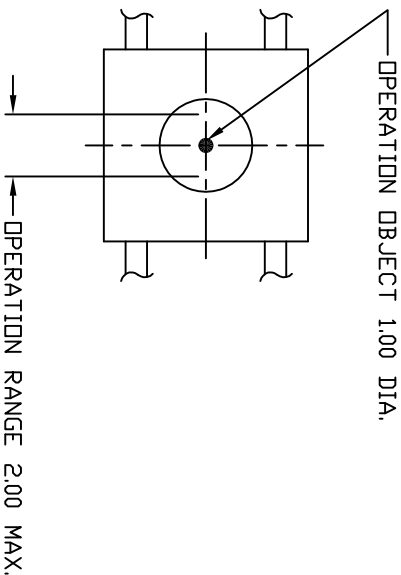


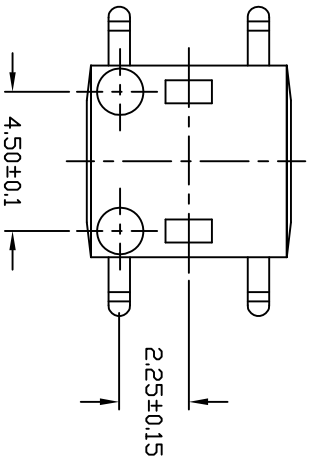

RECOMMEND P.C.B. LAYOUT

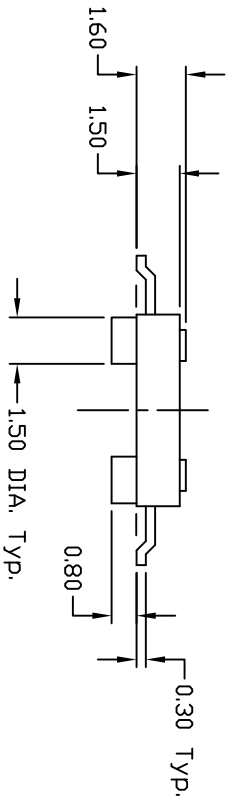

CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NDS. FOR REF ONLY
3. PACKAGING: TAPE & REEL
4. TRAVEL: 0.25 +0.2/-0.1mm
5. CONTACT RESISTANCE: 100 milli Ohms Max.

OPERATION MODE



4. IRRAVEL: 0.025 +0.02/-0.1mm			
5. CONTACT RESISTANCE: 100 milli Ohms Max.			
A	REVISED & REDRAWN		
REV.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TOLERANCES			
0.0			±0.4
0.00			±0.25
TITLE			
TL 1237 F160 Q G			
E-SWITCH®			
SCALE	DATE	DR	DWG
4:1	2/23/95	MM	P010324
REV			
A			