

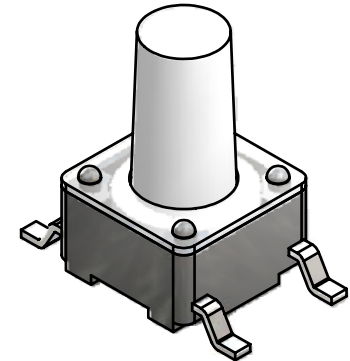
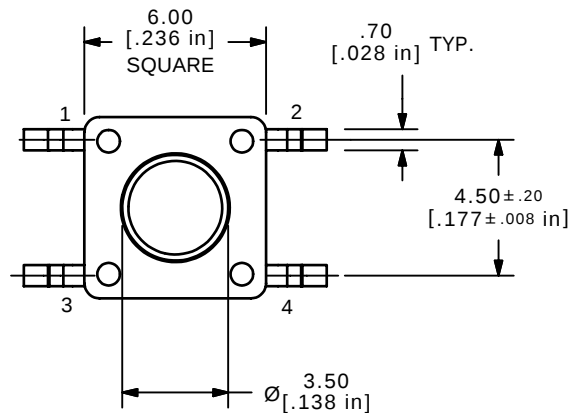
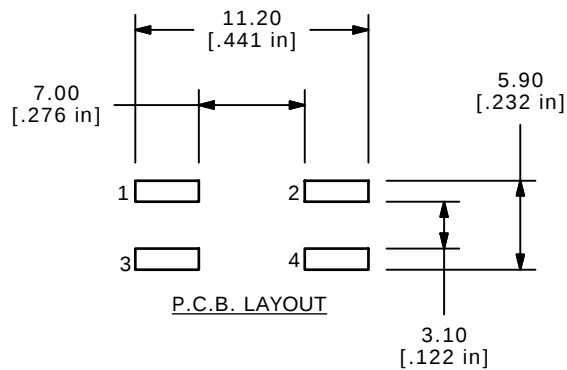



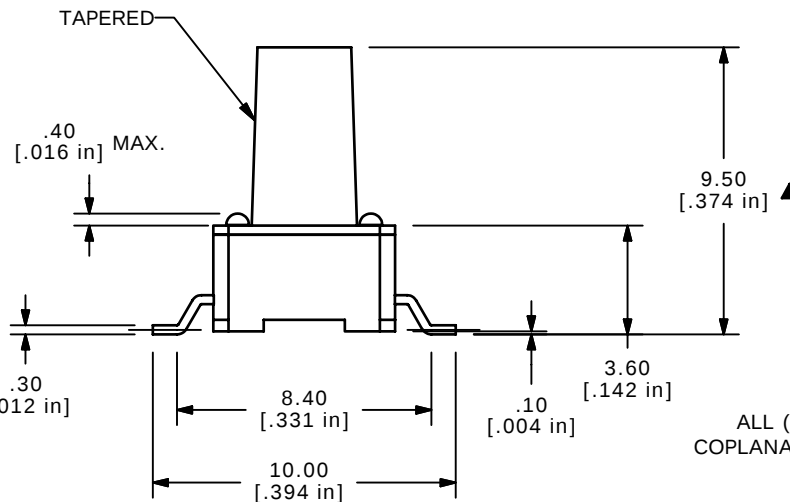

ISOMETRIC



ALL (4) TERMINALS
COPLANAR W/IN .10(.004")

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 260 $\pm$ 50 gms
6. TRAVEL: 0.25 $\pm$.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
9. CONTACT MATERIAL: SILVER
- ▲ 10. 2002/95/EC (ROHS) COMPLIANT
11. PACKAGING: 90/PCS TUBE
12. ▲ DENOTES CRITICAL PARAMETER

E-SWITCH®

TITLE TL3301BF260QG

B	16648	REVISED AND REDRAWN	11/13/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 11/13/2006

DR TN

DWG P010534

REV B