



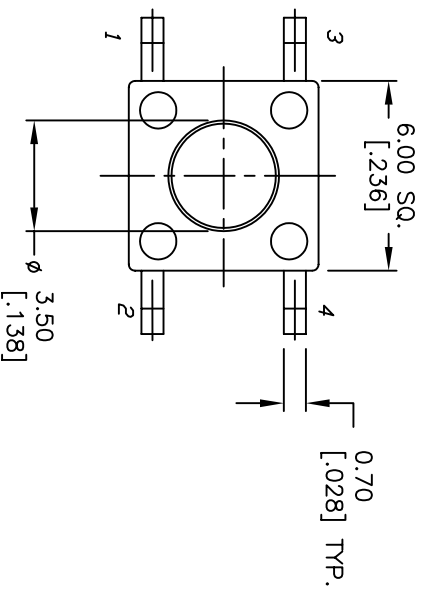


RECOMMENDED MOUNTING PAD



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. CONTACT MATERIAL: Silver
6. OPERATING TEMPERATURE: -40°C to $+80^{\circ}\text{C}$
7. OPERATING FORCE: $100 \pm 50\text{gf}$
8. TRAVEL: $0.25 \pm 0.1\text{mm}$
9. BODY & STEM: HIGH TEMP PLASTIC PPS (UL94V0) VALOX
10. CONTACT RESISTANCE: 100 MILLI-OHMS Max.
11. ELECTRICAL LIFE: 100,000 CYCLES min.
12. ▲ DESIGNATE MAJOR FEATURE:
13. PACKAGED: TAPE/REEL

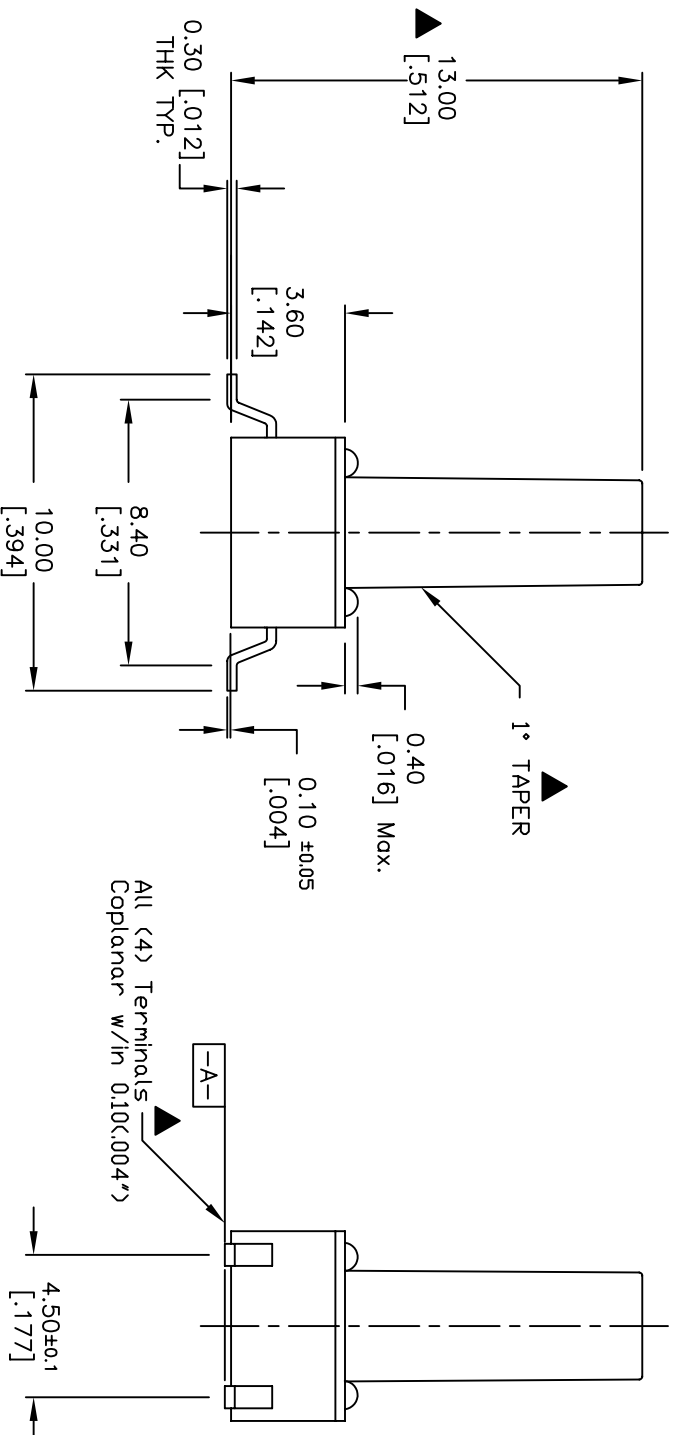

				TITLE	TL 3301D F100 Q G		
A	12264	RELEASED FOR PRODUCTION	6/26/02	CJB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
		SCALE	DATE	DWG	REV		
		4:1	6/26/02	CB	P010614	A	