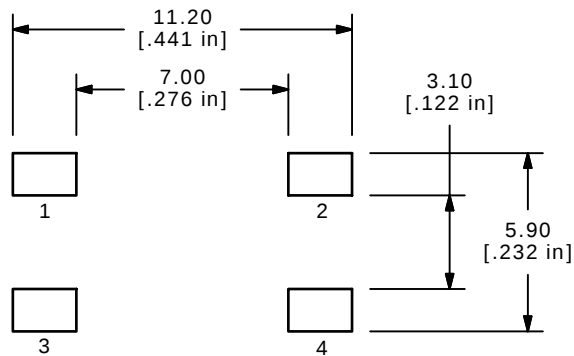





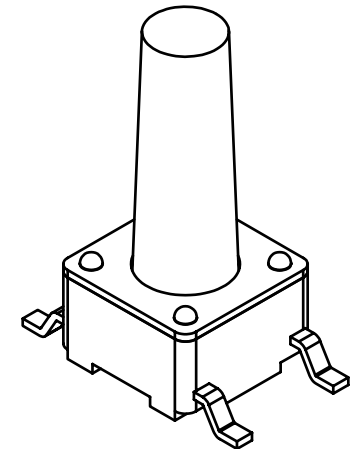
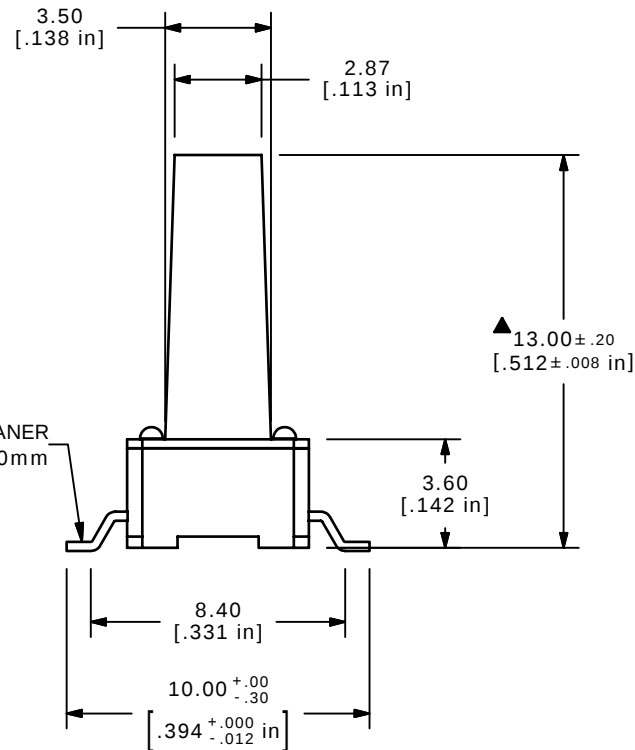
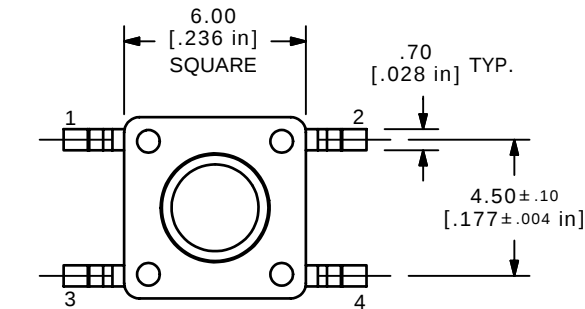
P.C.B. LAYOUT



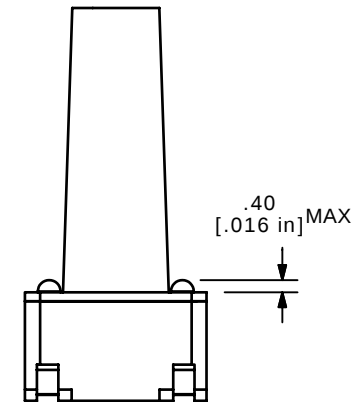
CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: $x.xx \pm 0.4$
 $x.xx \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 12VDC
- ▲5. OPERATING FORCE: 100 ± 30 gms
6. TRAVEL: $0.25 + 0.20 / - 0.10$ mm
7. CONTACT RESISTANCE: 100 MILLI-OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES MIN.
- ▲9. CONTACTS: GOLD
- ▲10. PACKAGING: BULK, 750 PIECES PER POLY BAG
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT.

TERMINALS TO BE COPLANAR
WITHIN 0.10mm

ISOMETRIC

**E-SWITCH®**

TITLE TL3301DF100RG

SCALE 4:1

DATE 07/19/06

DR BK

DWG P010629

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	16234	NEW RELEASE	7/19/06	BK
REV	PCR NO	DESCRIPTION	DATE	BY