

6000 SP Splash Resistant Rocker Switches 16A 250Vac



- ▶ Ratings up to 20A, 277Vac
- ▶ High in-rush (ON-OFF types)
- ▶ Positive switch action
- ▶ Distinctive styling
- ▶ Illuminated & non-illuminated
- ▶ Single pole
- ▶ Matching indicator
- ▶ Panel cut out: 30.1 x 11.1mm



In house test



European 16(4)A 250Vac T125, 10A 400Vac T125

UL CSA 20A 277Vac, 250Vac 11/2hp, 125Vac 1hp
UL 100°C, file E45221, CSA file LR10990

Inrush 150A* to EN61058-1 (ON - OFF only)

* applies to non-momentary types

RoHS compliant

3mm contact gap with Positive Break switching.
Call factory for IP details.
Technical data on pages 4 & 5 (switches), 6 (indicators).



C 6003 A L B R 2 1197W

ORDER FORMAT

TERMINAL CODE FUNCTION CODE ROCKER CODE BODY CODE BODY COLOR ROCKER COLOR LAMP VOLTAGE IF REQUIRED LEGEND & OPTIONS

TERMINAL	FUNCTION	ROCKER
C 6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 3 	A Softline Matt
	6000 ON - OFF 	
	6001 ON - OFF (momentary ON) 	A Softline Matt
	6002 ON - OFF (momentary OFF) 	Lit
	6003 ON - OFF Lit 	P Lit window Matt
	6008 ON - OFF Lit (Unswitched neutral) 	
	6009 ON - OFF (momentary ON) Lit (Unswitched neutral) 	
	6010 ON - ON 	A Lens Matt (6030 indicator only)
	6011 ON - ON (momentary 1 side) 	
S 4.8 x 0.8	6030 Indicator 	
Screw & Clamp N/A for assemblies with 3 terminals	For twin switches and double pole circuits see pages 20 & 21	



Integral Splash Resistance

Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body.

For IP65 see options below



C6000AL ---



C6000AL ---



C6010AL ---



C6003AL ---




C6003PL ---



C6030AL ---

BODY

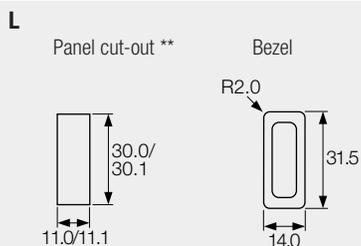

Cut-outs must be punched in the direction of insertion

OPTIONS


- Finish** Matt is standard
- Color** Call factory for custom colors. A full range is available for large orders
- Legend printing** Select from the examples or call factory for custom legends
- Lamp voltage** Call factory for details
- Protective cover** (designed to IP65 #)
The 6000 series is a water thru design. For a higher level of sealing, a snap on cover is available (add suffix G74). This reduces panel thickness by 1mm.



Panel sealing washer W46 is available but reduces panel thickness by a further 0.8mm. Covers are not suitable for momentary types.

For all options call the factory

DIMENSIONS (mm)

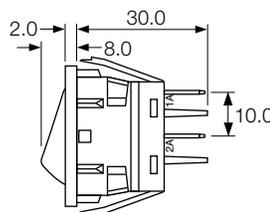

Panel thickness
L 0.75 to 2.5mm

** For cut-out details on momentary switches call sales

Examples of our range of legend printing

() is legend color B-Black, W-White, R-Red



1224(W)



1223(W)