



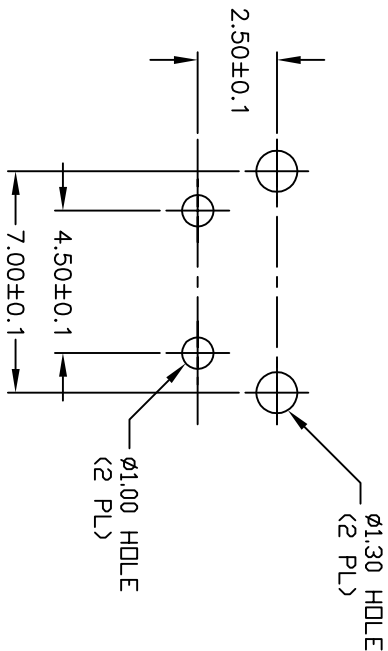



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25±0.1mm
6. OPERATING FORCE: 160±50gf
7. CONTACT RESISTANCE: 100 milliohms Max.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
9. ▲ DESIGNATE MAJOR FEATURE
- ▲ 10. MATERIAL: NYLON 6/6 TO WITHSTAND
SOLDERING TEMP. OF 260°C MAX. FOR 30 SECONDS
11. BOTH STEM AND BODY TO BE UL94V-0
12. 2002/95/EC (ROHS) COMPLIANT
- ▲ 13. ACTUATOR COLOR: WHITE (NATURAL NYLON)

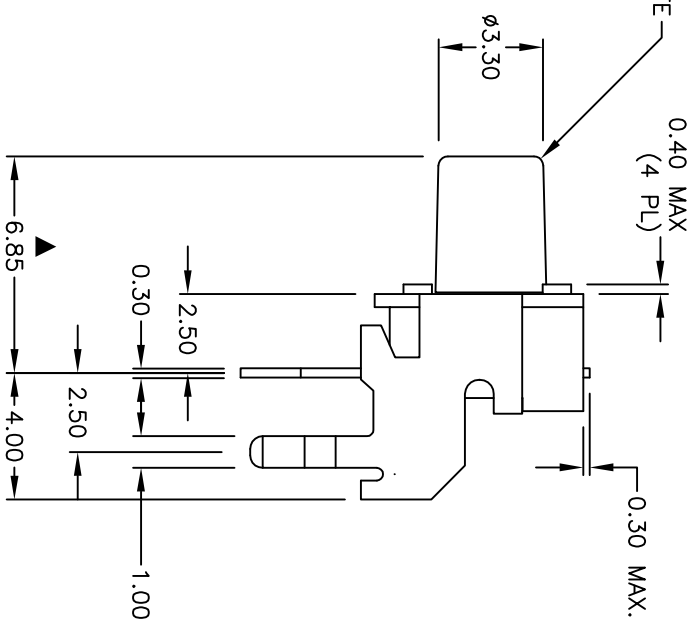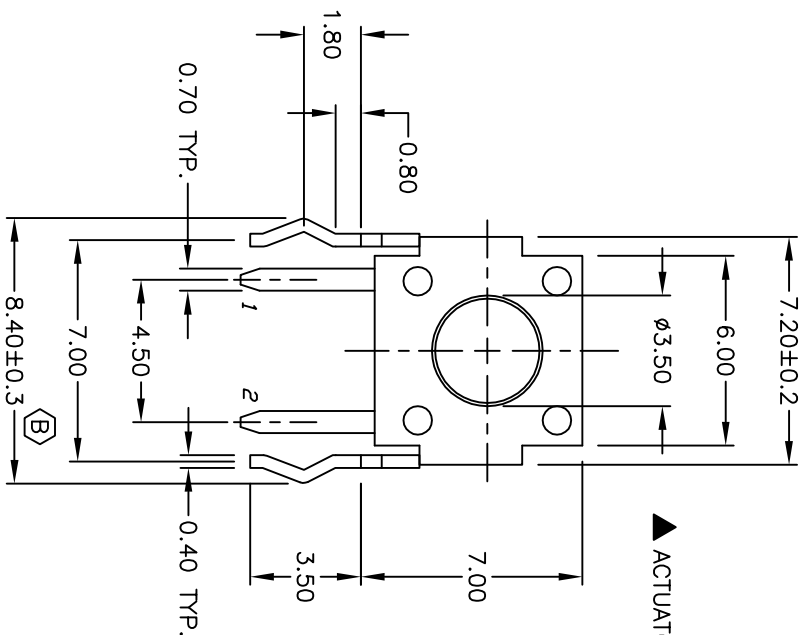

▲ 13. ACTUATOR COLOR: WHITE (NATURAL NYLON)						 E-SWITCH				
B	18128	ONE TOLERANCE WAS +/- 0.1	6/9/08	BLR	TITLE					
A	15932	RELEASED	4/4/06	PH	TL 1105 M F160 Q (94 VD)					
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					4:1	4/4/06	PH	P020237	B	