
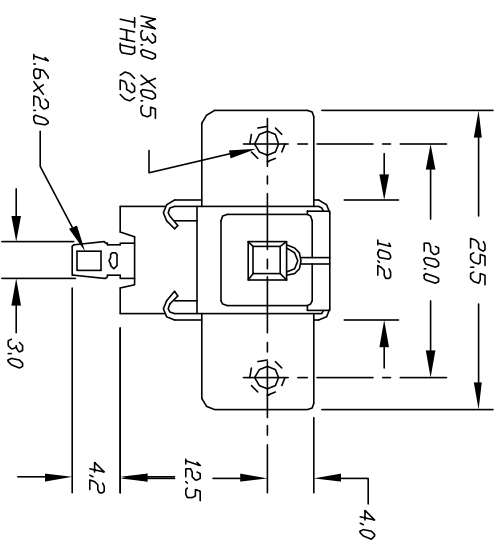


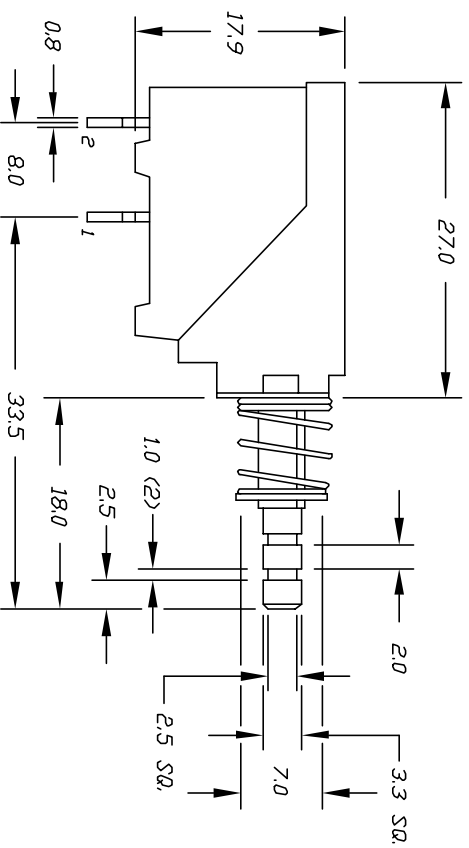

20

CIRCUIT: SPST (Normally Open)
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: AC650V 5A/80A, TV-5
4. CONTACT RESISTANCE: 100 mΩ Dims MAX. AT DC5V 1A
5. DIELECTRIC STRENGTH: AC 1000V FOR 1 MIN (TWL-TWL)
6. OPERATING FDRCE: 350±100gf

6. OPERATING FORCE: 350±100gf				
C	REVISED & REDRAWN	7/28/98		
REV.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE AND IS NOT TO BE COPIED OR TRANSFERRED				
			TOLERANCES	
			±0.4	
			±0.25	
TITLE				
SCALE	DATE	DR	DWG	REV
2:1	7/17/96	MM	P030052	C