

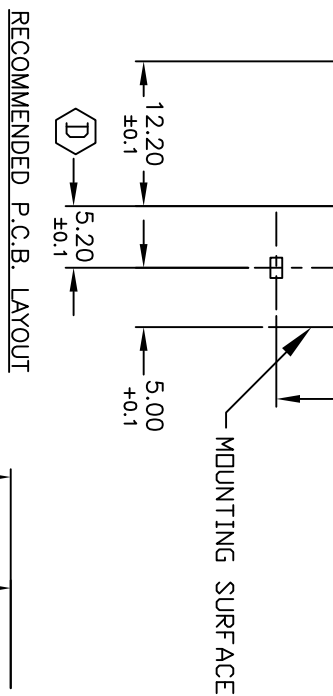


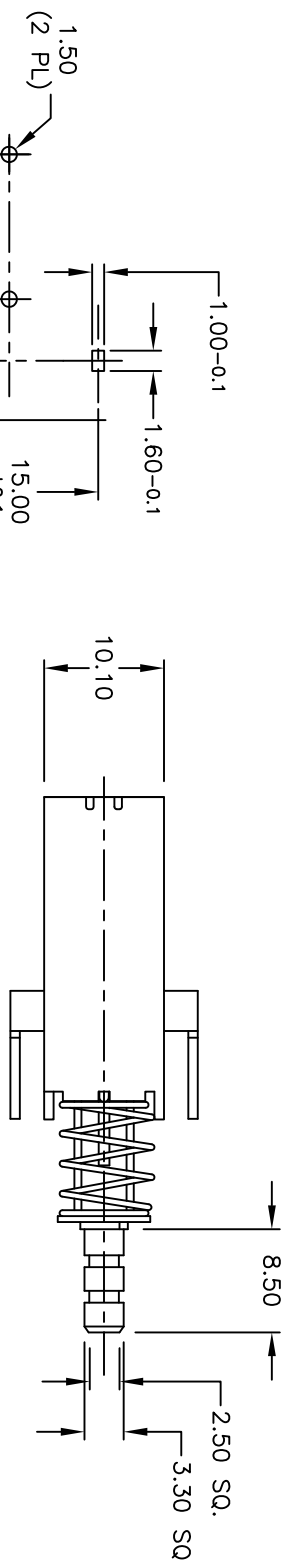



RECOMMENDED P.C.B. LAYOUT



NOTES:

CIRCUIT: SPST

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NO.S FOR REF ONLY.
4. RATING: 250V AC 5A/80A, {TV-5@125V}
125V AC 10A, UL, CUL, {VDE} APPROVED
IN RUSH { @80A @250V }
5. CONTACT RESISTANCE: 100mILLI Ohms MAX. (AT DC 5V@1A)
6. DIELECTRIC STRENGTH: AC 1500V
7. OPERATING FORCE: 300±100gf
8. TRAVEL: FULL STROKE: 3.5+0.5/-0mm
LOCK STROKE: 2.5+0.5/-0mm

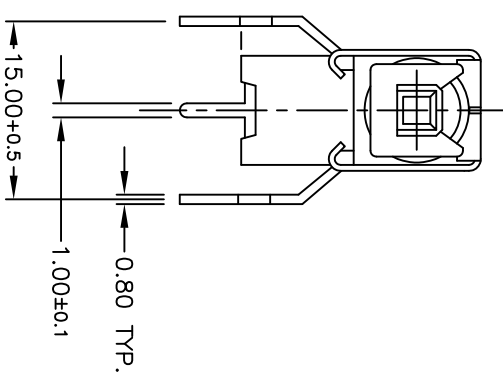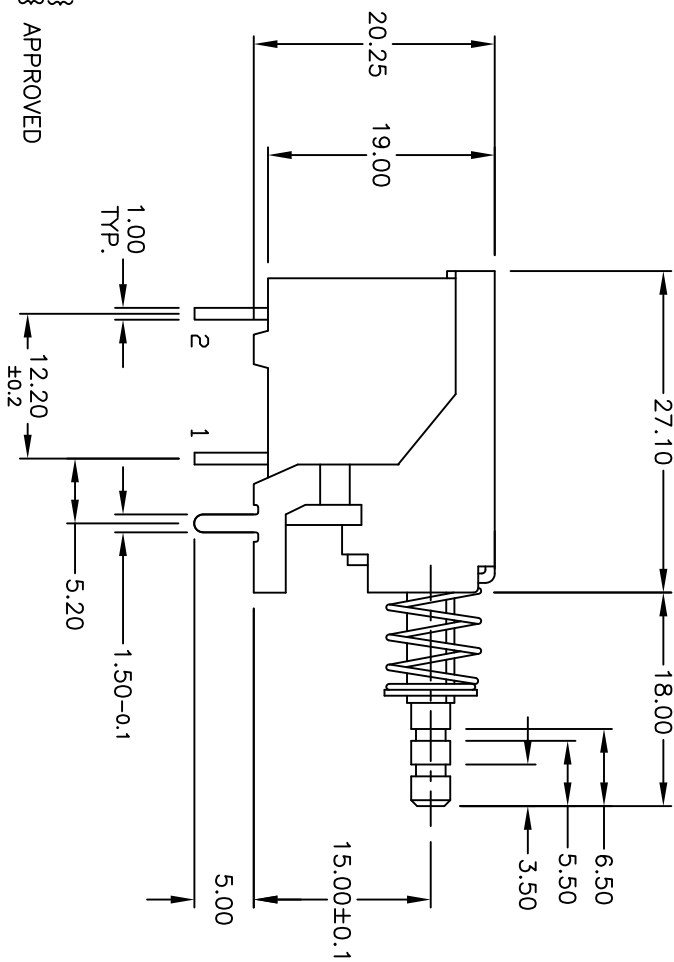

E-SWITCH®

E-SWITCH®					TITLE P197EEPc												
D	21255	5.20 WAS 5.30 IN PC LAYOUT	9/30/13	EBP													
C	15741	EDIT PC LAYOUT	2/7/06	PH													
B	12265	REVISED AND REDRAWN	6/26/02	CJB													
REV.	ECN No.	DESCRIPTION	DATE	CHKD													
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE					DATE		DR		DWG		REV	
					1.5:1					6/26/02		CJB		P030054		D	