
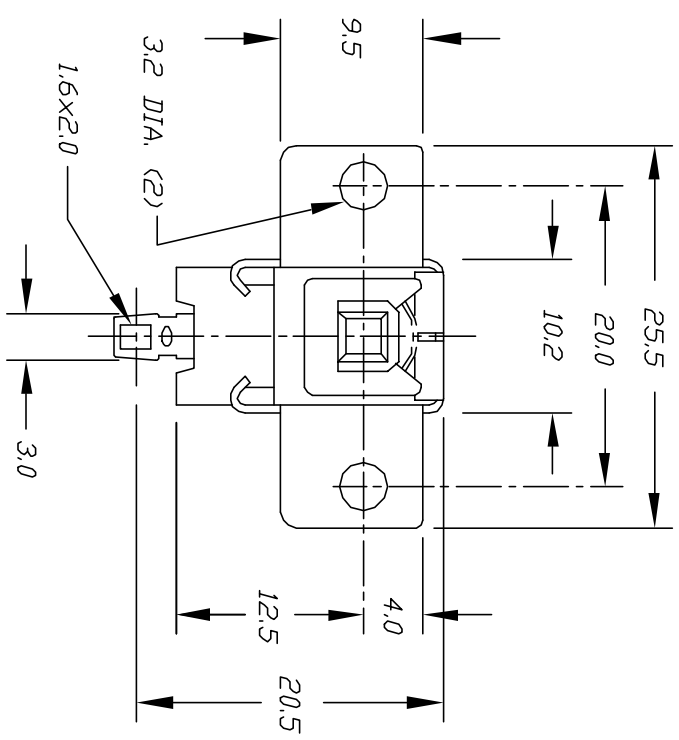


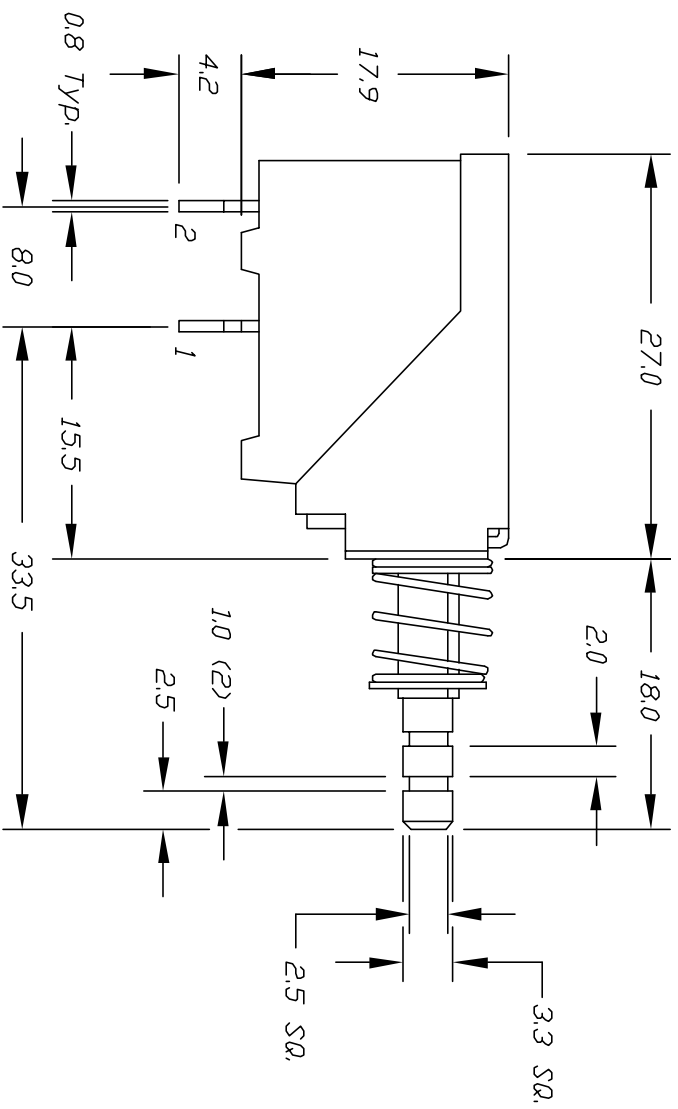

1
2

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING, AC 250V 5A/80A, TV-5
4. CONTACT RESISTANCE: 100 mΩ; Dhrs MAX. AT DC5V 1A
5. DIELECTRIC STRENGTH: AC 1000V FOR 1 MIN (TWL-TWL)
6. OPERATING FORCE: 350±100gf

CIRCUIT: SPST (Normally Open)

CONTACT CONFIGURATION

E-SWITCH®

TOLERANCES			TITLE		
0.0	±0.4				
0.00	±0.25				
REV.			SCALE	DATE	DR
B			2:1	10/3/97	MM
DESCRIPTION			DATE		
REVISED & REDRAWN			7/28/98		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			CHKD		
			P197 SA (LATCHING)		
			P030056		
			REV B		