


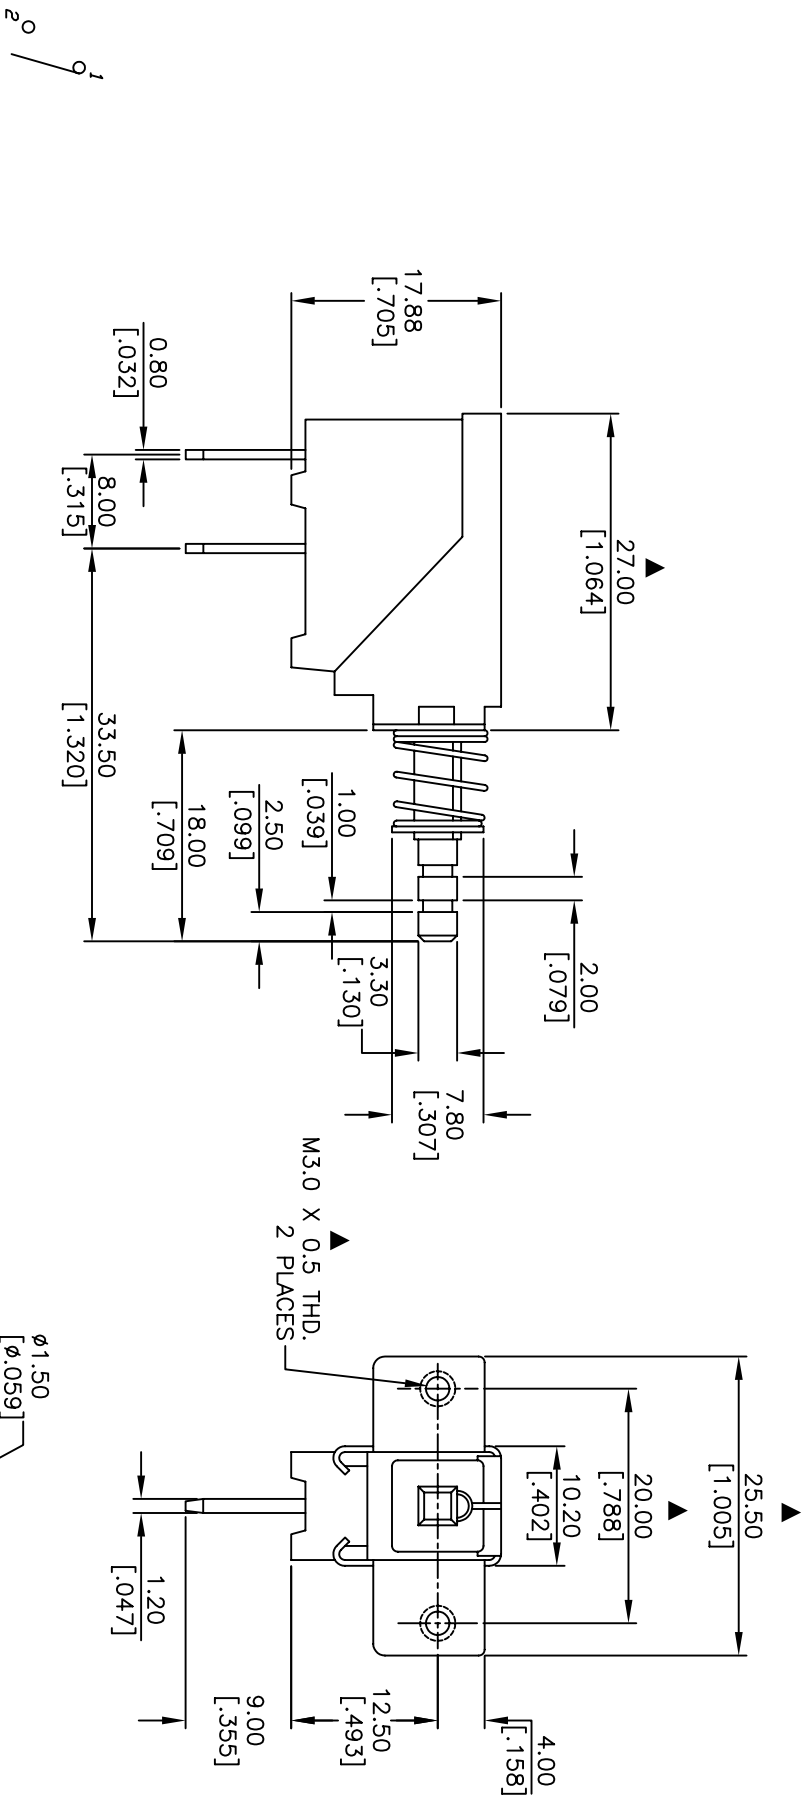

CIRCUIT: SPST (Normally Open)
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 250VAC 5A/80A, TV-5
5. CONTACT RESISTANCE: 100 MILLIOHMS MAX. AT DC5V 1A
6. DIELECTRIC STRENGTH: 1000VAC FOR 1 MIN. (TM1-TM1)
7. OPERATING FORCE: 350±100GF
8. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	15746	EDIT PC LAYOUT	2/8/06	PH
A	13207	RELEASED FOR PRODUCTION	6/13/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE	SCALE	DATE	DR	DWG	REV
P1970APB	1.5:1	6/13/03	AR	P030058	B

E-SWITCH®