



RECOMMEND P.C.B. LAYOUT

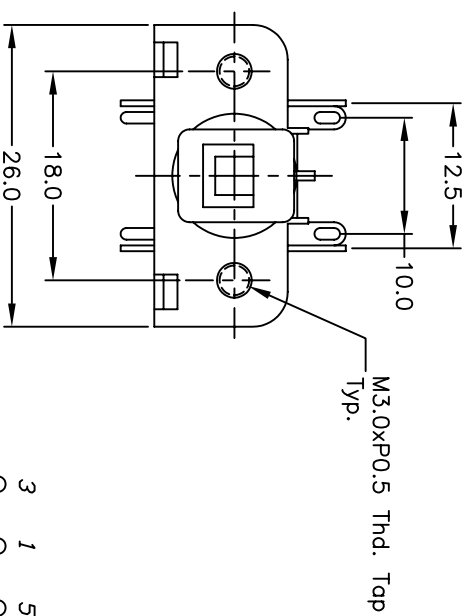

M3.0xP0.5 Thd. Tap
—Typ.



CIRCUIT: DPDT
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: AC 125V 7A, AC 250V 4A
 5. CONTACT RESISTANCE: 20m ohm max. at 5V DC 1A.
 6. DIELECTRIC STRENGTH: AC 1500V RMS
 7. LIFE EXPECTANCY: Electrical: 6,000 cycle
 8. OPERATING FORCE: 550 ± 150 gf
 9. TRAVEL: Full: 5.5mm
 10. 2002/95/EC (ROHS) COMPLIANT

B	16925	FIXED NOTE 9	1/25/07	TN
A	10433	RELEASED FOR PRODUCTION		
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE				
P2270A2B18A				
SCALE	DATE	DR	DWG	REV
1.5:1	1/25/07	TN	P030105	B