

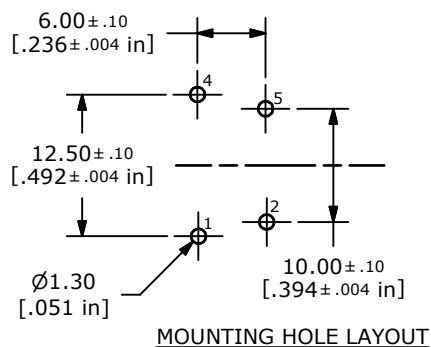



CIRCUIT DIAGRAM DPST

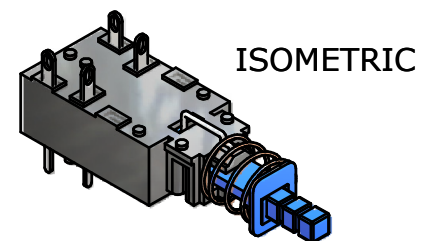

MOUNTING HOLE LAYOUT

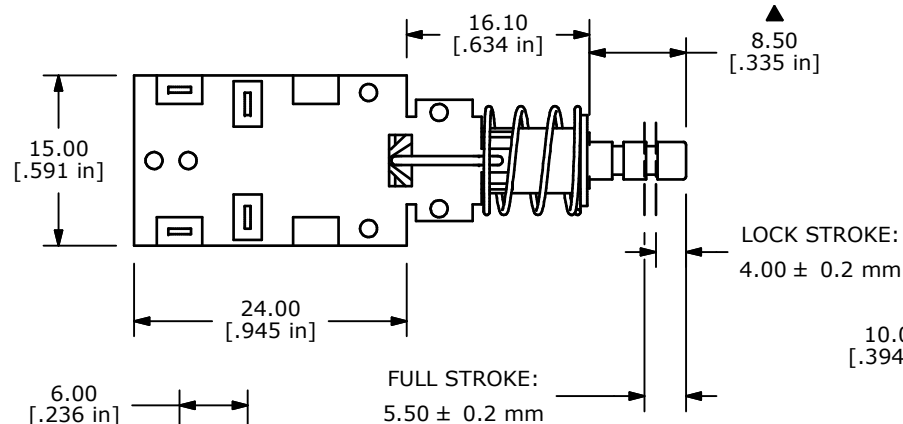

ISOMETRIC

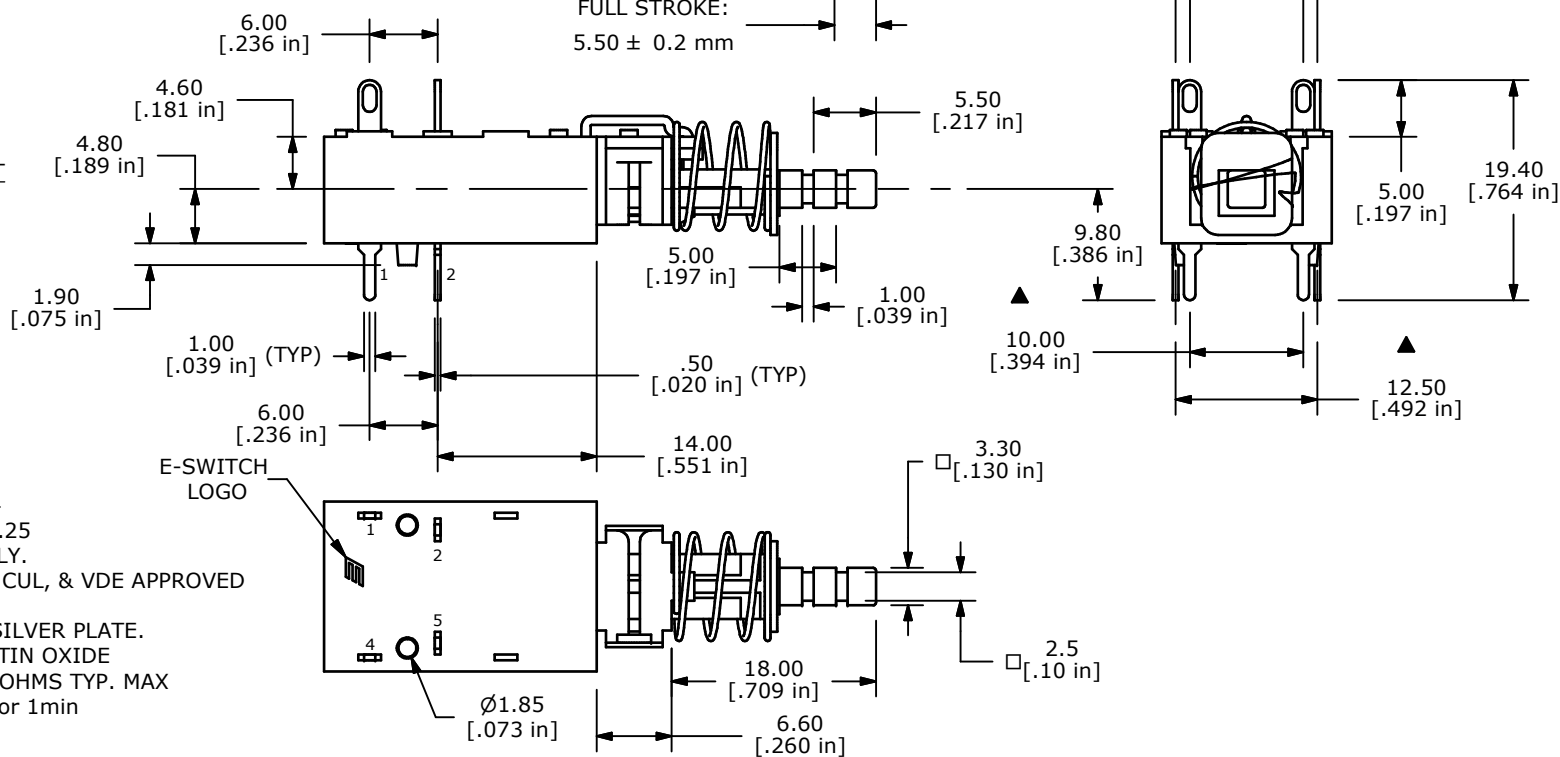

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 7A@125V, 4A@250 UL, CUL, & VDE APPROVED
- ▲ 5. CONTACT MATERIAL:
TERMINALS, COPPER ALLOY SILVER PLATE.
CONTACTS, COPPER ALLOY W/TIN OXIDE
6. CONTACT RESISTANCE: 100Milli-OHMS TYP. MAX
7. DIELECTRIC STRENGTH: 1000V for 1min
8. ELECTRICAL LIFE: 6,000 CYCLES
9. OPERATING FORCE: 550 ± 150gf
10. TRAVEL: FULL: 5.5, LOCK: 4.0
11. ▲ DENOTES CRITICAL PARAMETER



E-SWITCH®



TITLE P227EE1DXA

A	18736	RELEASED FOR PRODUCTION	12/31/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	1.5	DATE	12/31/2009	DR	BLR	DWG	P030137	REV	A
-------	-----	------	------------	----	-----	-----	---------	-----	---