

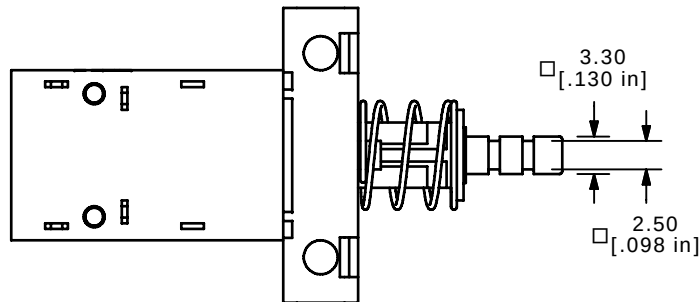
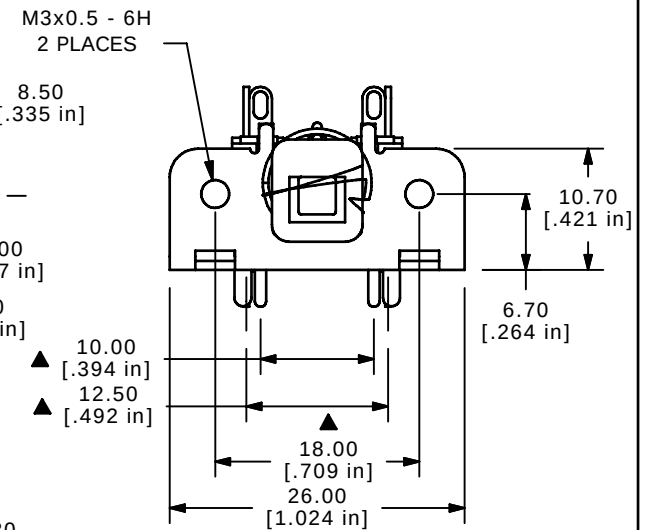
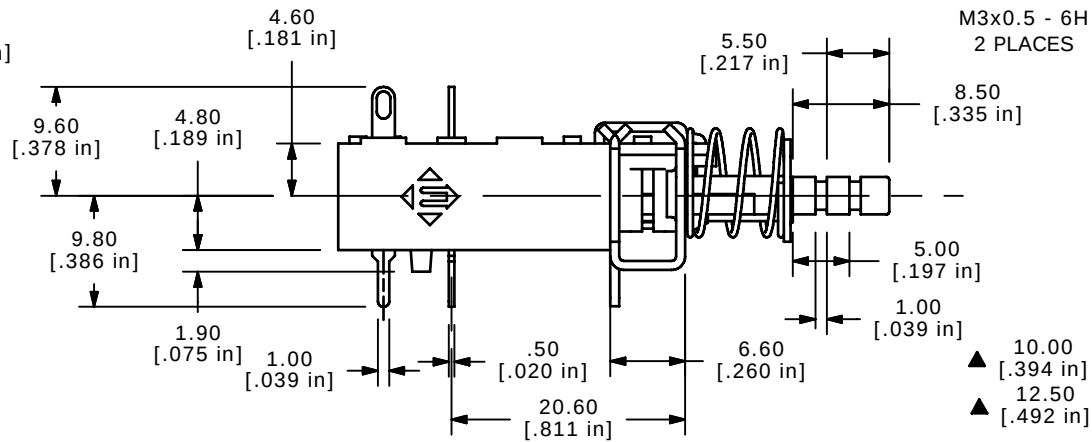
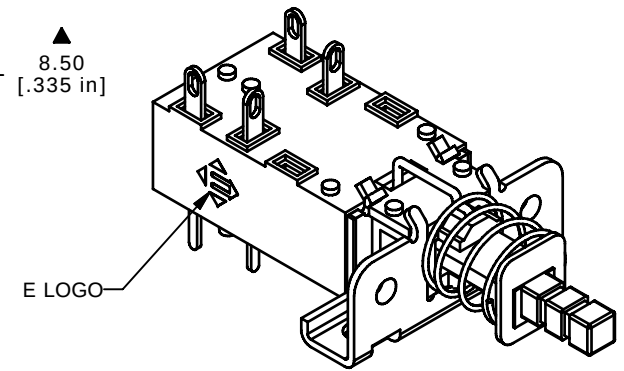
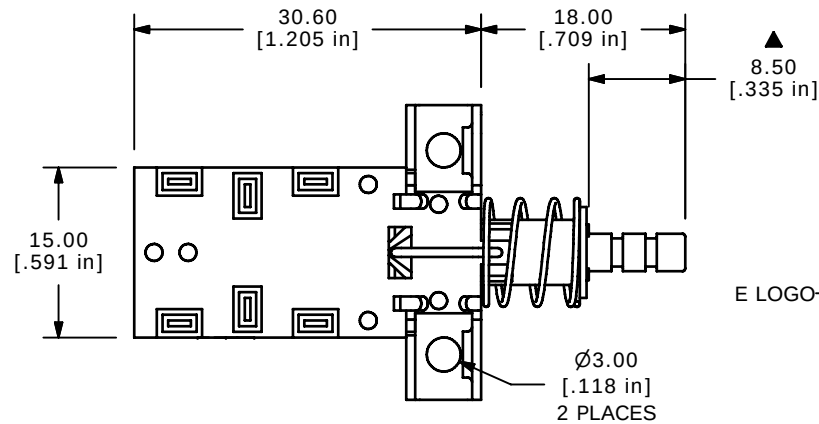


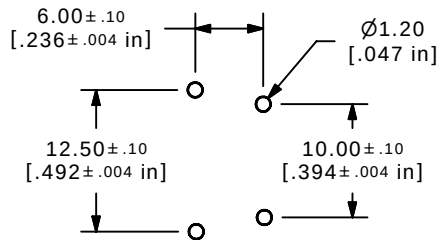

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. RATING: 7A@125VAC, 4A@250VAC UL, CUL, & VDE APPROVED
5. CONTACT MATERIAL:
TERMINALS, COPPER ALLOY SILVER PLATE.
CONTACTS, COPPER ALLOY W/TIN OXIDE
6. CONTACT RESISTANCE: 100MILLI-OHMS MAX.
7. DIELECTRIC STRENGTH: 1000VAC for 1min
8. ELECTRICAL LIFE: 6,000 CYCLES
9. OPERATING FORCE: 550 ± 150gf TYP.
10. TRAVEL: FULL: 5.5 ± 0.2mm, LOCK: 4.0 ± 0.2mm
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT



A	20669	RELEASED FOR PRODUCTION	7/10/12	KDP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE P227EE1B18A

SCALE 1.5

DATE 7/10/2012

DR KDP

DWG P030139

REV A