



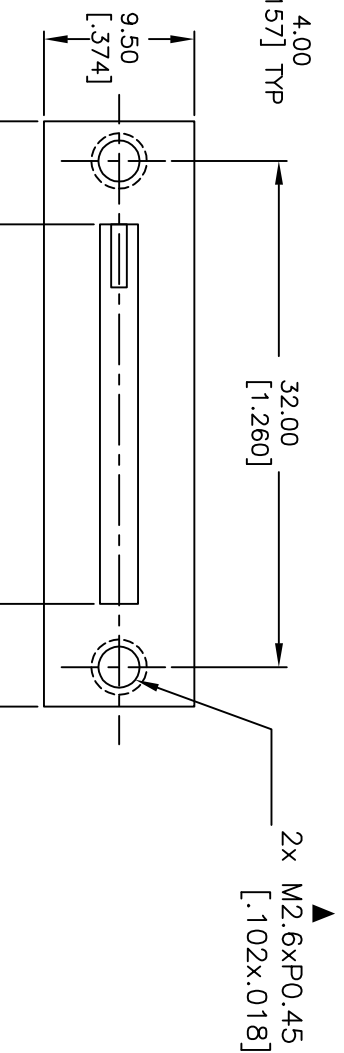


RECOMMENDED P.C.B. LAYOUT

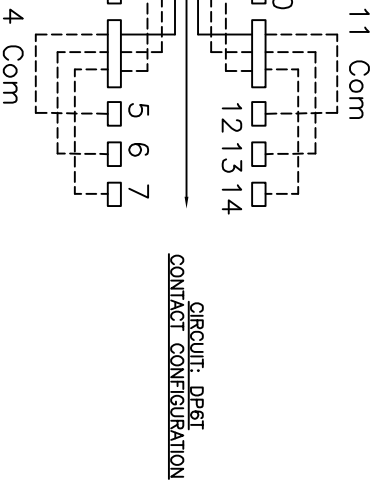

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.3A @30V DC
5. CONTACT MATERIAL: COPPER ALLOY W/ SILVER PLATE
6. CONTACT RESISTANCE: >20mW (INITIAL)
7. DIELECTRIC STRENGTH: 500V AC FOR 1 MIN
8. OPERATING LIFE: 10,000 CYCLES MIN
9. OPERATING FORCE: 300 ±100gf
10. TRAVEL: 4mm
11. ▲ DENOTES CRITICAL PARAMETER.
12. OPERATING TEMP: -20°C TO +70°C
- ⑧ 13. TIMING: NON-SPECIFIED
14. 2002/95/EC (ROHS) COMPLIANT

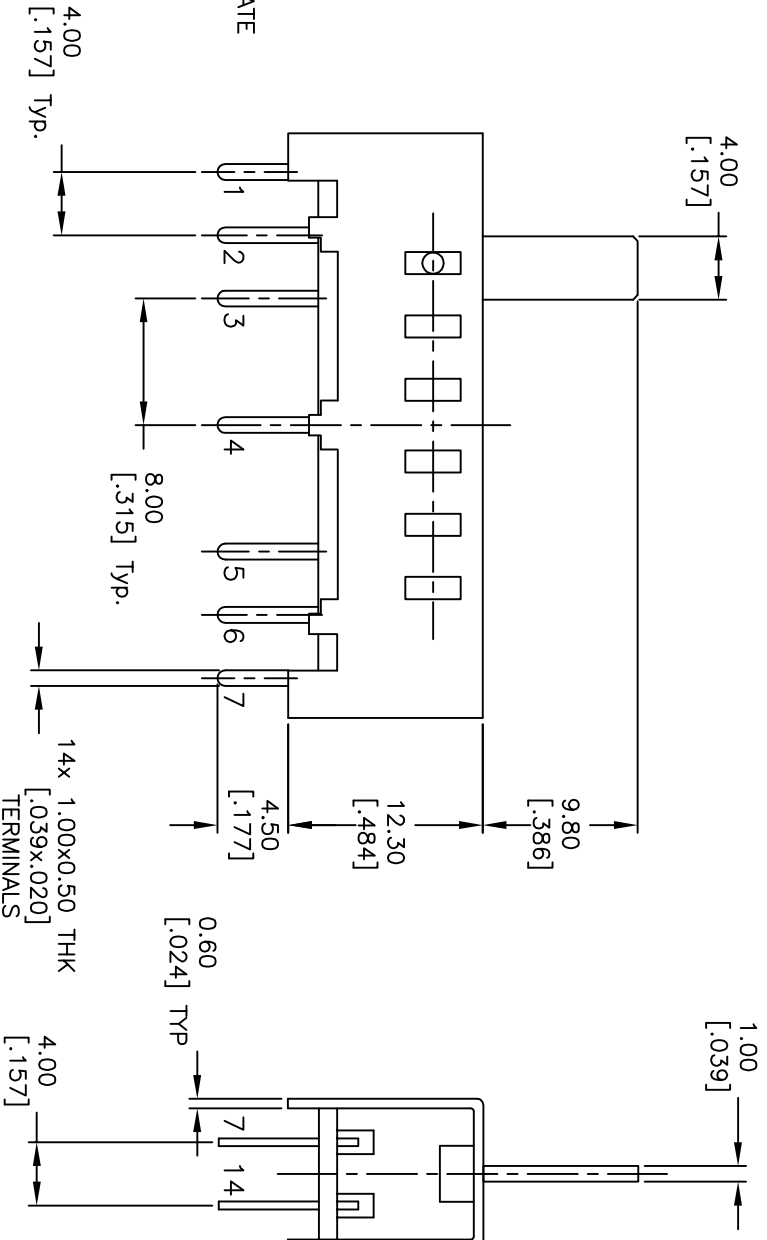

		 E-SWITCH™		
TITLE				
EG 2601A				
SCALE	DATE	DR	DWG	REV
2:1	1/20/09	BLR	P040287	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11789	RELEASED FOR PRODUCTION	10/25/01	CJC
B	18381	ADD TIMING NOTE	1/20/09	BLR