


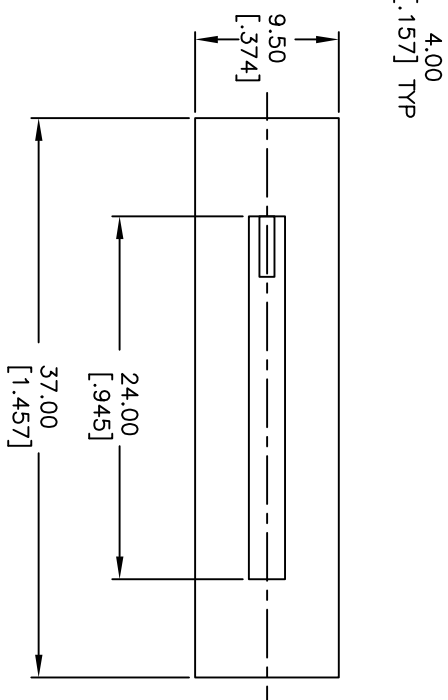


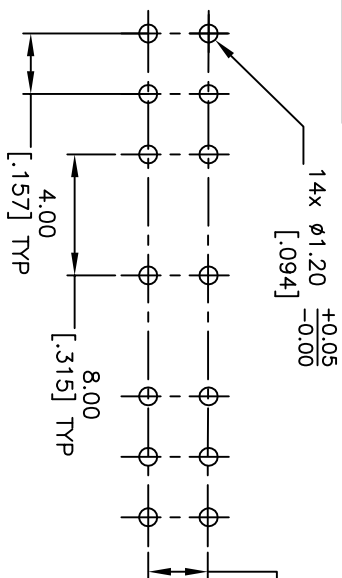

CIRCUIT: DP6T
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.3A @30V DC
5. CONTACT MATERIAL: COPPER ALLOY W/ SILVER PLATE
6. CONTACT RESISTANCE: >20mΩ (INITIAL)
7. DIELECTRIC STRENGTH: 500V AC FOR 1 MIN
8. OPERATING LIFE: 10,000 CYCLES MIN
9. OPERATING FORCE: 300 ±100gf
10. TRAVEL: 4mm
11. OPERATING TEMP: -20°C TO +70°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. TIMING: NON-SPECIFIED.
14. 2002/95/EC (ROHS) COMPLIANT.

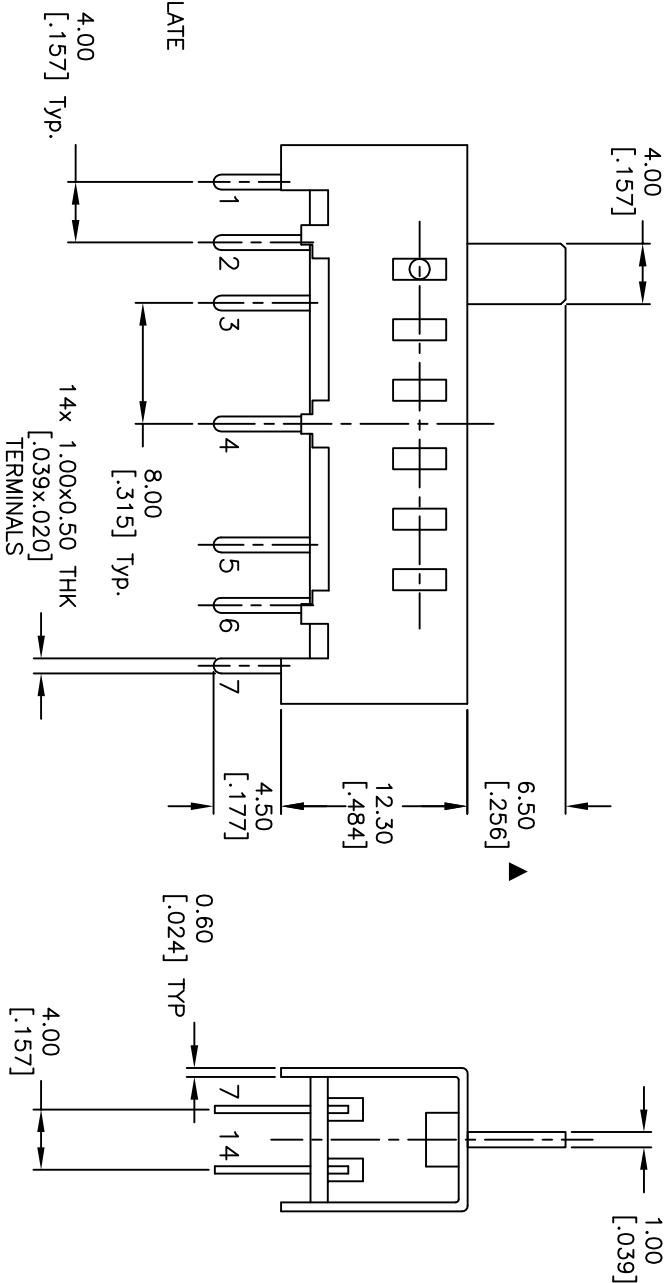

13. TIMING: NON-SPECIFIED.									
14. 2002/95/EC (ROHS) COMPLIANT.									
B	18381	ADD TIMING NOTE	1/20/09	BLR					
A	13399	RELEASED FOR PRODUCTION	8/26/03	AR					
REV.	PCR No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED									
TITLE					E-SWITCH				
EG2601C									
SCALE		DATE	DR	DWG	REV				
2:1		1/20/09	BLR	P040288	B				