

1900 Vandal Resistant Switches - Designed to IP66



3A 125/250Vac T85



5A 125/250Vac T85 50E3



RoHS compliant

Approvals apply to switch mechanism only.
μ contact gap.
Switching mechanisms are snap action (not sealed).


- ▶ Stainless steel button and bezel
- ▶ Vandal resistant construction
- ▶ Front panel sealed to IP66
- ▶ Single and double pole change-over switching



P1911VL

P1961VL


ORDER FORMAT

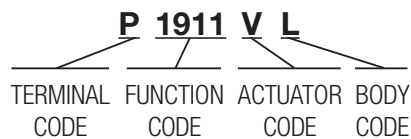


▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
P 2.8 x 0.5 6.0 7.6 1.65	1911 ON - ON (momentary 1 side) Single pole	V Flat top (stainless steel) 	A Stainless steel Chamfer profile bezel Ø19.2 Panel cut-out Panel thickness up to 4.0mm
T 3.2 3.4 Solder	1961 ON - ON (momentary 1 side) Double pole	P Domed top (stainless steel) 	L Stainless steel Chamfer profile bezel Ø16.0 Panel cut-out Panel thickness up to 4.0mm
X 1.2 4.0 PCB			

Dimensions (mm)

Single pole (P1911VA shown)

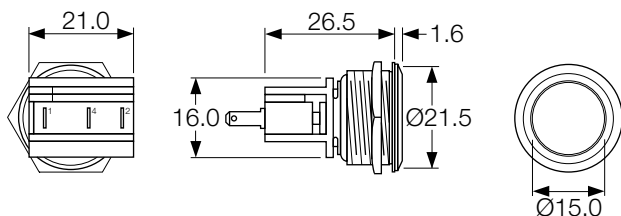

Double pole (P1961VL shown)

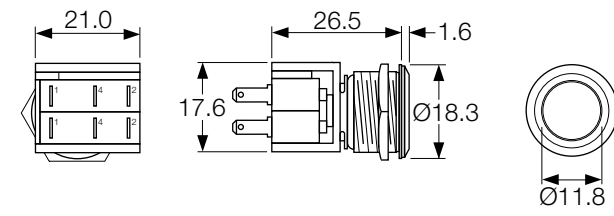

8300 Vandal Resistant Switches - Designed to IP66



H8300RP

- ▶ Momentary or alternative actions available
- ▶ Ratings up to 16A, 250Vac
- ▶ Single and double pole
- ▶ Stainless steel button & bezel
- ▶ Vandal resistant construction
- ▶ Choice of body styles
- ▶ 19.2mm or 22.5mm mounting holes
- ▶ Front panel sealed to IP66
- ▶ Raised, flat or domed actuator options



16(4)A 250Vac T85, 1E4 (10,000 Operations)
12(12)A 250Vac T105, 1E4 (10,000 Operations)
8(8)A 250Vac T105, 5E4 (50,000 Operations)
6(6)A 250Vac T125, 5E4 (50,000 Operations)



12A 250Vac DP, 13A 250Vac SP
250Vac 1hp, 125Vac 1/2hp
UL 85°C, file E45221, CSA file LR10990

In house test

10(10)A 250Vac



RoHS compliant

3mm contact gap.
Technical data on pages 4 & 5 (switches), 6 (indicators).




ORDER FORMAT

H 8300 R P


TERMINAL CODE FUNCTION CODE ACTUATOR CODE BODY CODE




TERMINAL

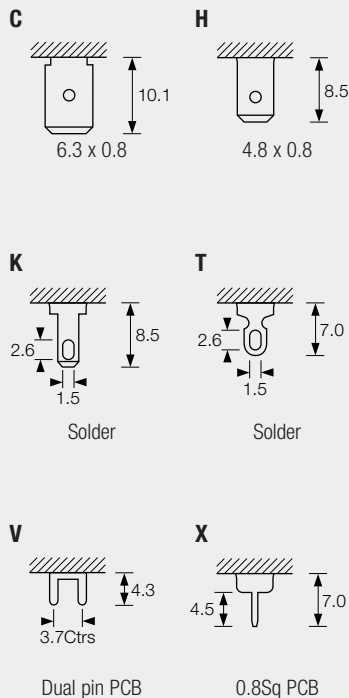


FUNCTION

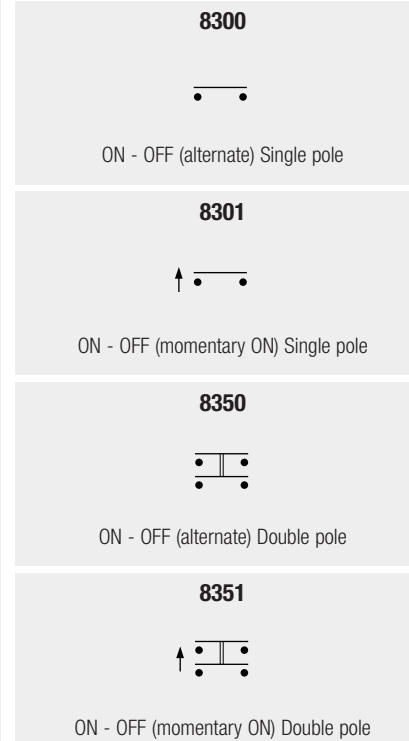





ACTUATOR

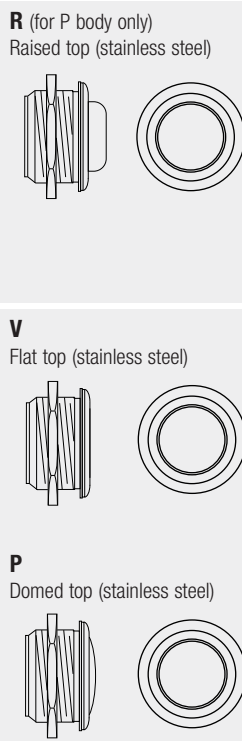

BODY

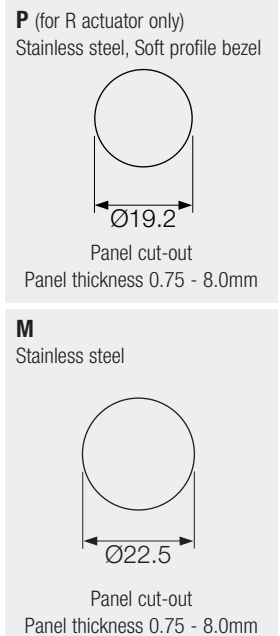

Dimensions (mm)
8300RP (H terminals shown)

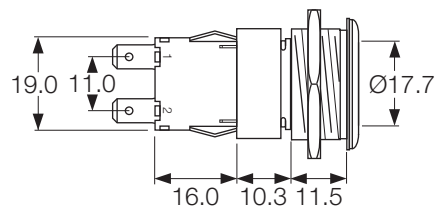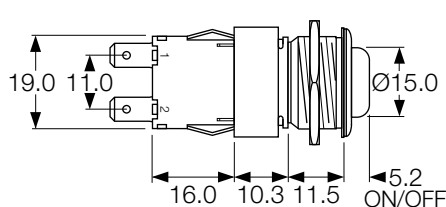

380 Vandal Resistant Switches - Designed to IP66



16(4)A 250Vac T85



16A 125/250Vac 3/4hp T85 50E3

125V 1/2 HP, 250V 3/4 HP, 0.4A 125Vdc, 0.2A 250Vdc



RoHS compliant

Approvals apply to switch mechanism only.
μ contact gap.
Switching mechanisms are snap action (not sealed).





- ▶ Snap action switches
- ▶ Ratings up to 16A, 250Vac
- ▶ Stainless steel button and bezel
- ▶ Front panel sealed to IP66
- ▶ Single pole C/O switch



383 2510V

ORDER FORMAT

383 2510 V
 TERMINAL FUNCTION ACTUATOR

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
383 	2510  ON - ON (momentary 1 side)	V Flat top (stainless steel)  	Stainless Steel Chamfer profile bezel  Ø19.2 Panel cut-out Panel thickness up to 8.0mm
385			
382			

Dimensions (mm)

3832510va

