

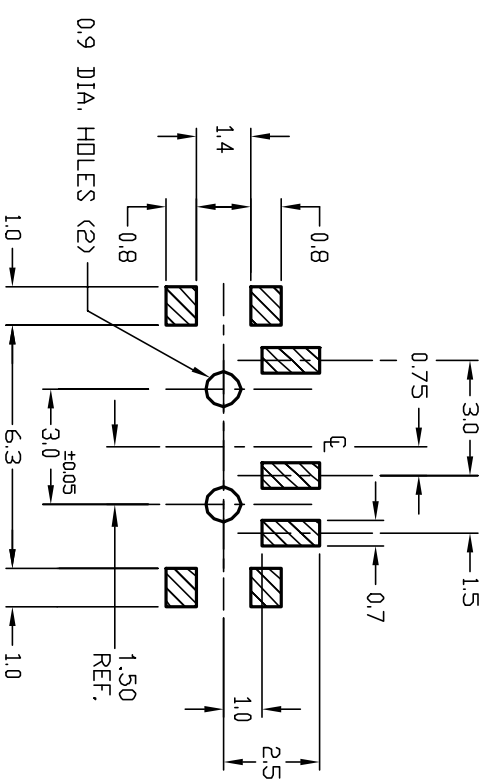
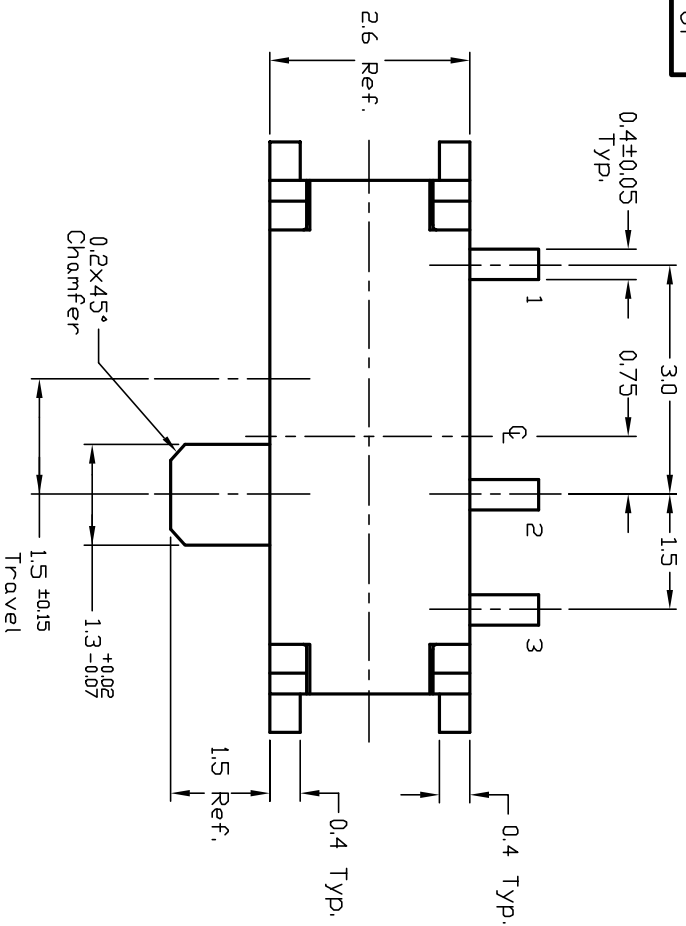
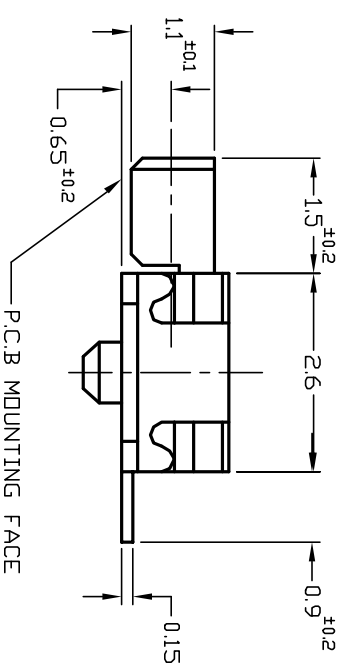


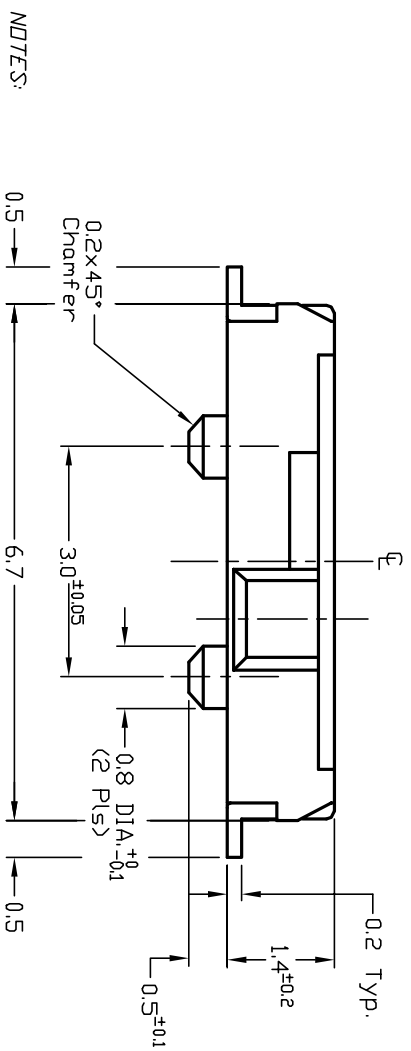

RECOMMENDED P.C.B. LAYOUT (SCALE 5:1)



1 2 CDM 3

CIRCUIT; SP2T

CONTACT CONFIGURATION

1. ALL DIMENSIONS IN MM
2. TERM. WDS. FOR REF ONLY
3. RATING: DC 4V, 0.3A
4. OPERATING FORCE: 200±100gf
5. CONTACT RESISTANCE: 70m Ohms Max.
6. INSULATION RESISTANCE: DC 100V-100M Ohms Min
7. WITHSTAND VOLTAGE: AC 100V-1MINUTE
8. OPERATING TEMP, -20°C to +70°C
9. LIFE: 10,000 Cycles min.

E	12175	ADD NOTE 8 & 9	5/22/02	CJB
D	11271	REMOVED DIMENSION	3/01/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		TITLE		
10:1		EG 1257		
DATE		DR	DWG	REV
8/27/97		MM	P112221	E