

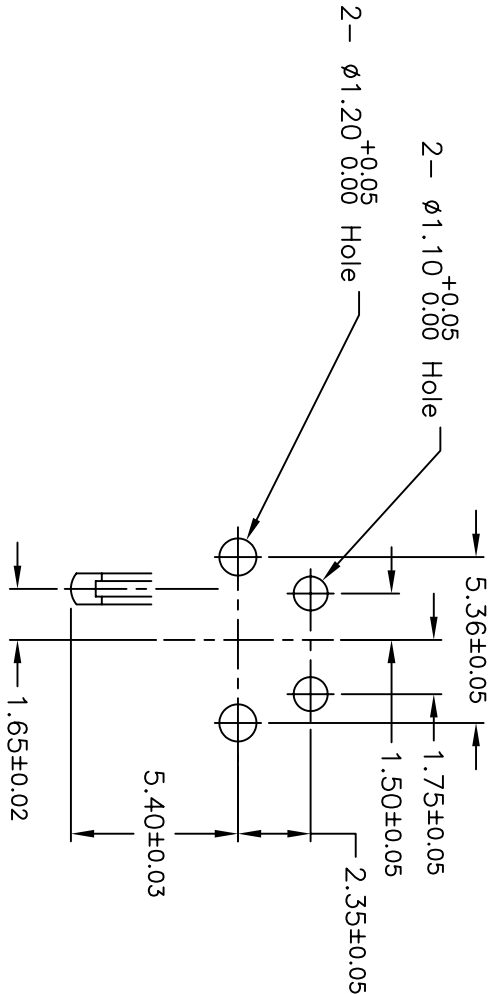
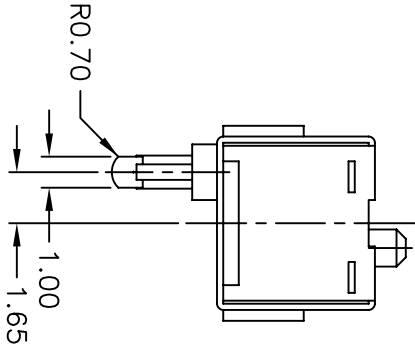



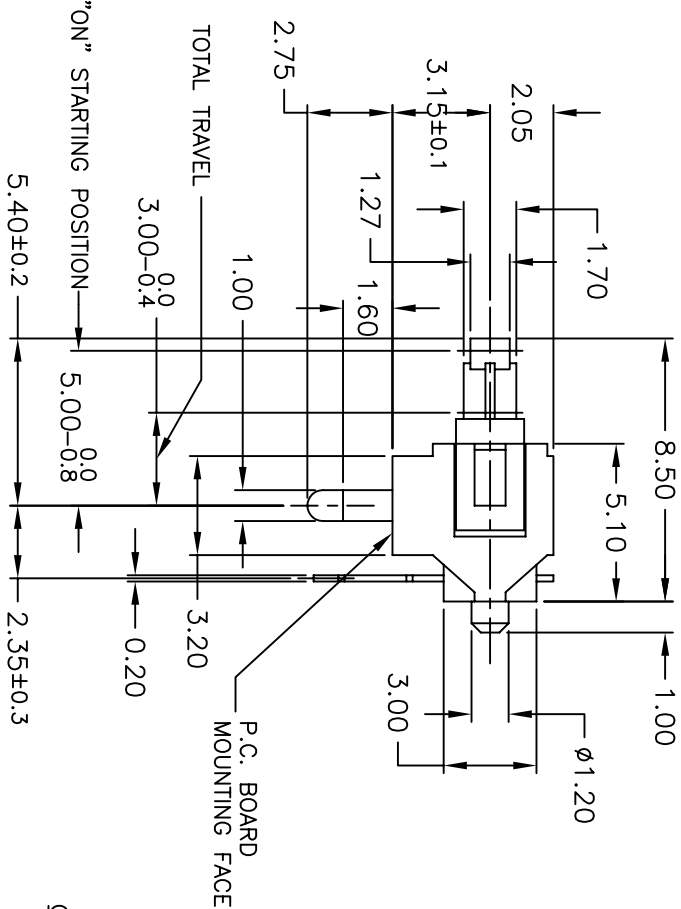

RECOMMEND P.C.B. LAYOUT

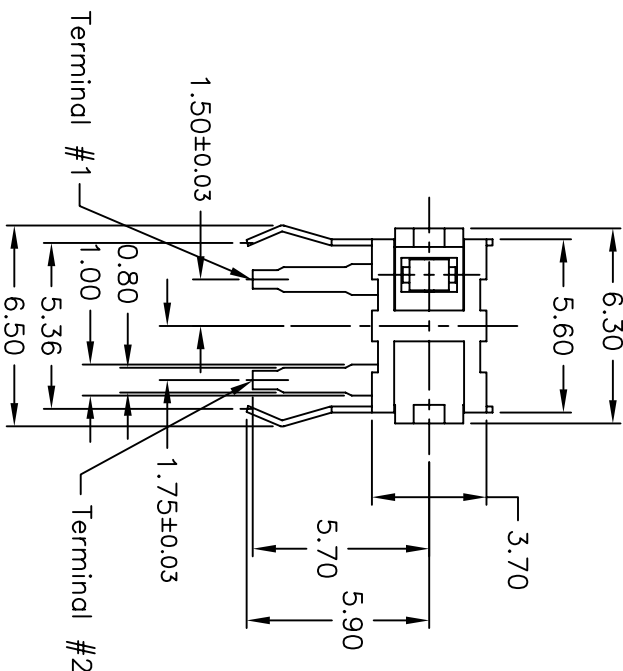

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF. ONLY
3. OPERATING FORCE: 36 gf. max.
4. RATING: 0.1A, @30V DC (Resistive load)
5. INITIAL CONTACT RESISTANCE: 1 ohm max.
6. OPERATING LIFE WITHOUT LOAD: 50,000 Cycles Min.

| TOLERANCES              |             |      | TITLE     |        |    |         |
|-------------------------|-------------|------|-----------|--------|----|---------|
| 0.0                     | ±0.4        |      | TD 1105B  |        |    |         |
| 0.00                    | ±0.25       |      |           |        |    |         |
| RELEASED FOR PRODUCTION |             |      | E-SWITCH® |        |    |         |
| REV.                    | DESCRIPTION | DATE |           |        |    |         |
| A                       |             |      | SCALE     | DATE   | DR | DWG     |
|                         |             |      | 4:1       | 9/1/98 | MM | P200016 |
|                         |             |      |           |        |    | REV     |
|                         |             |      |           |        |    | A       |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED