



DATE	SYM.	DESCRIPTION	DR	CK	REL

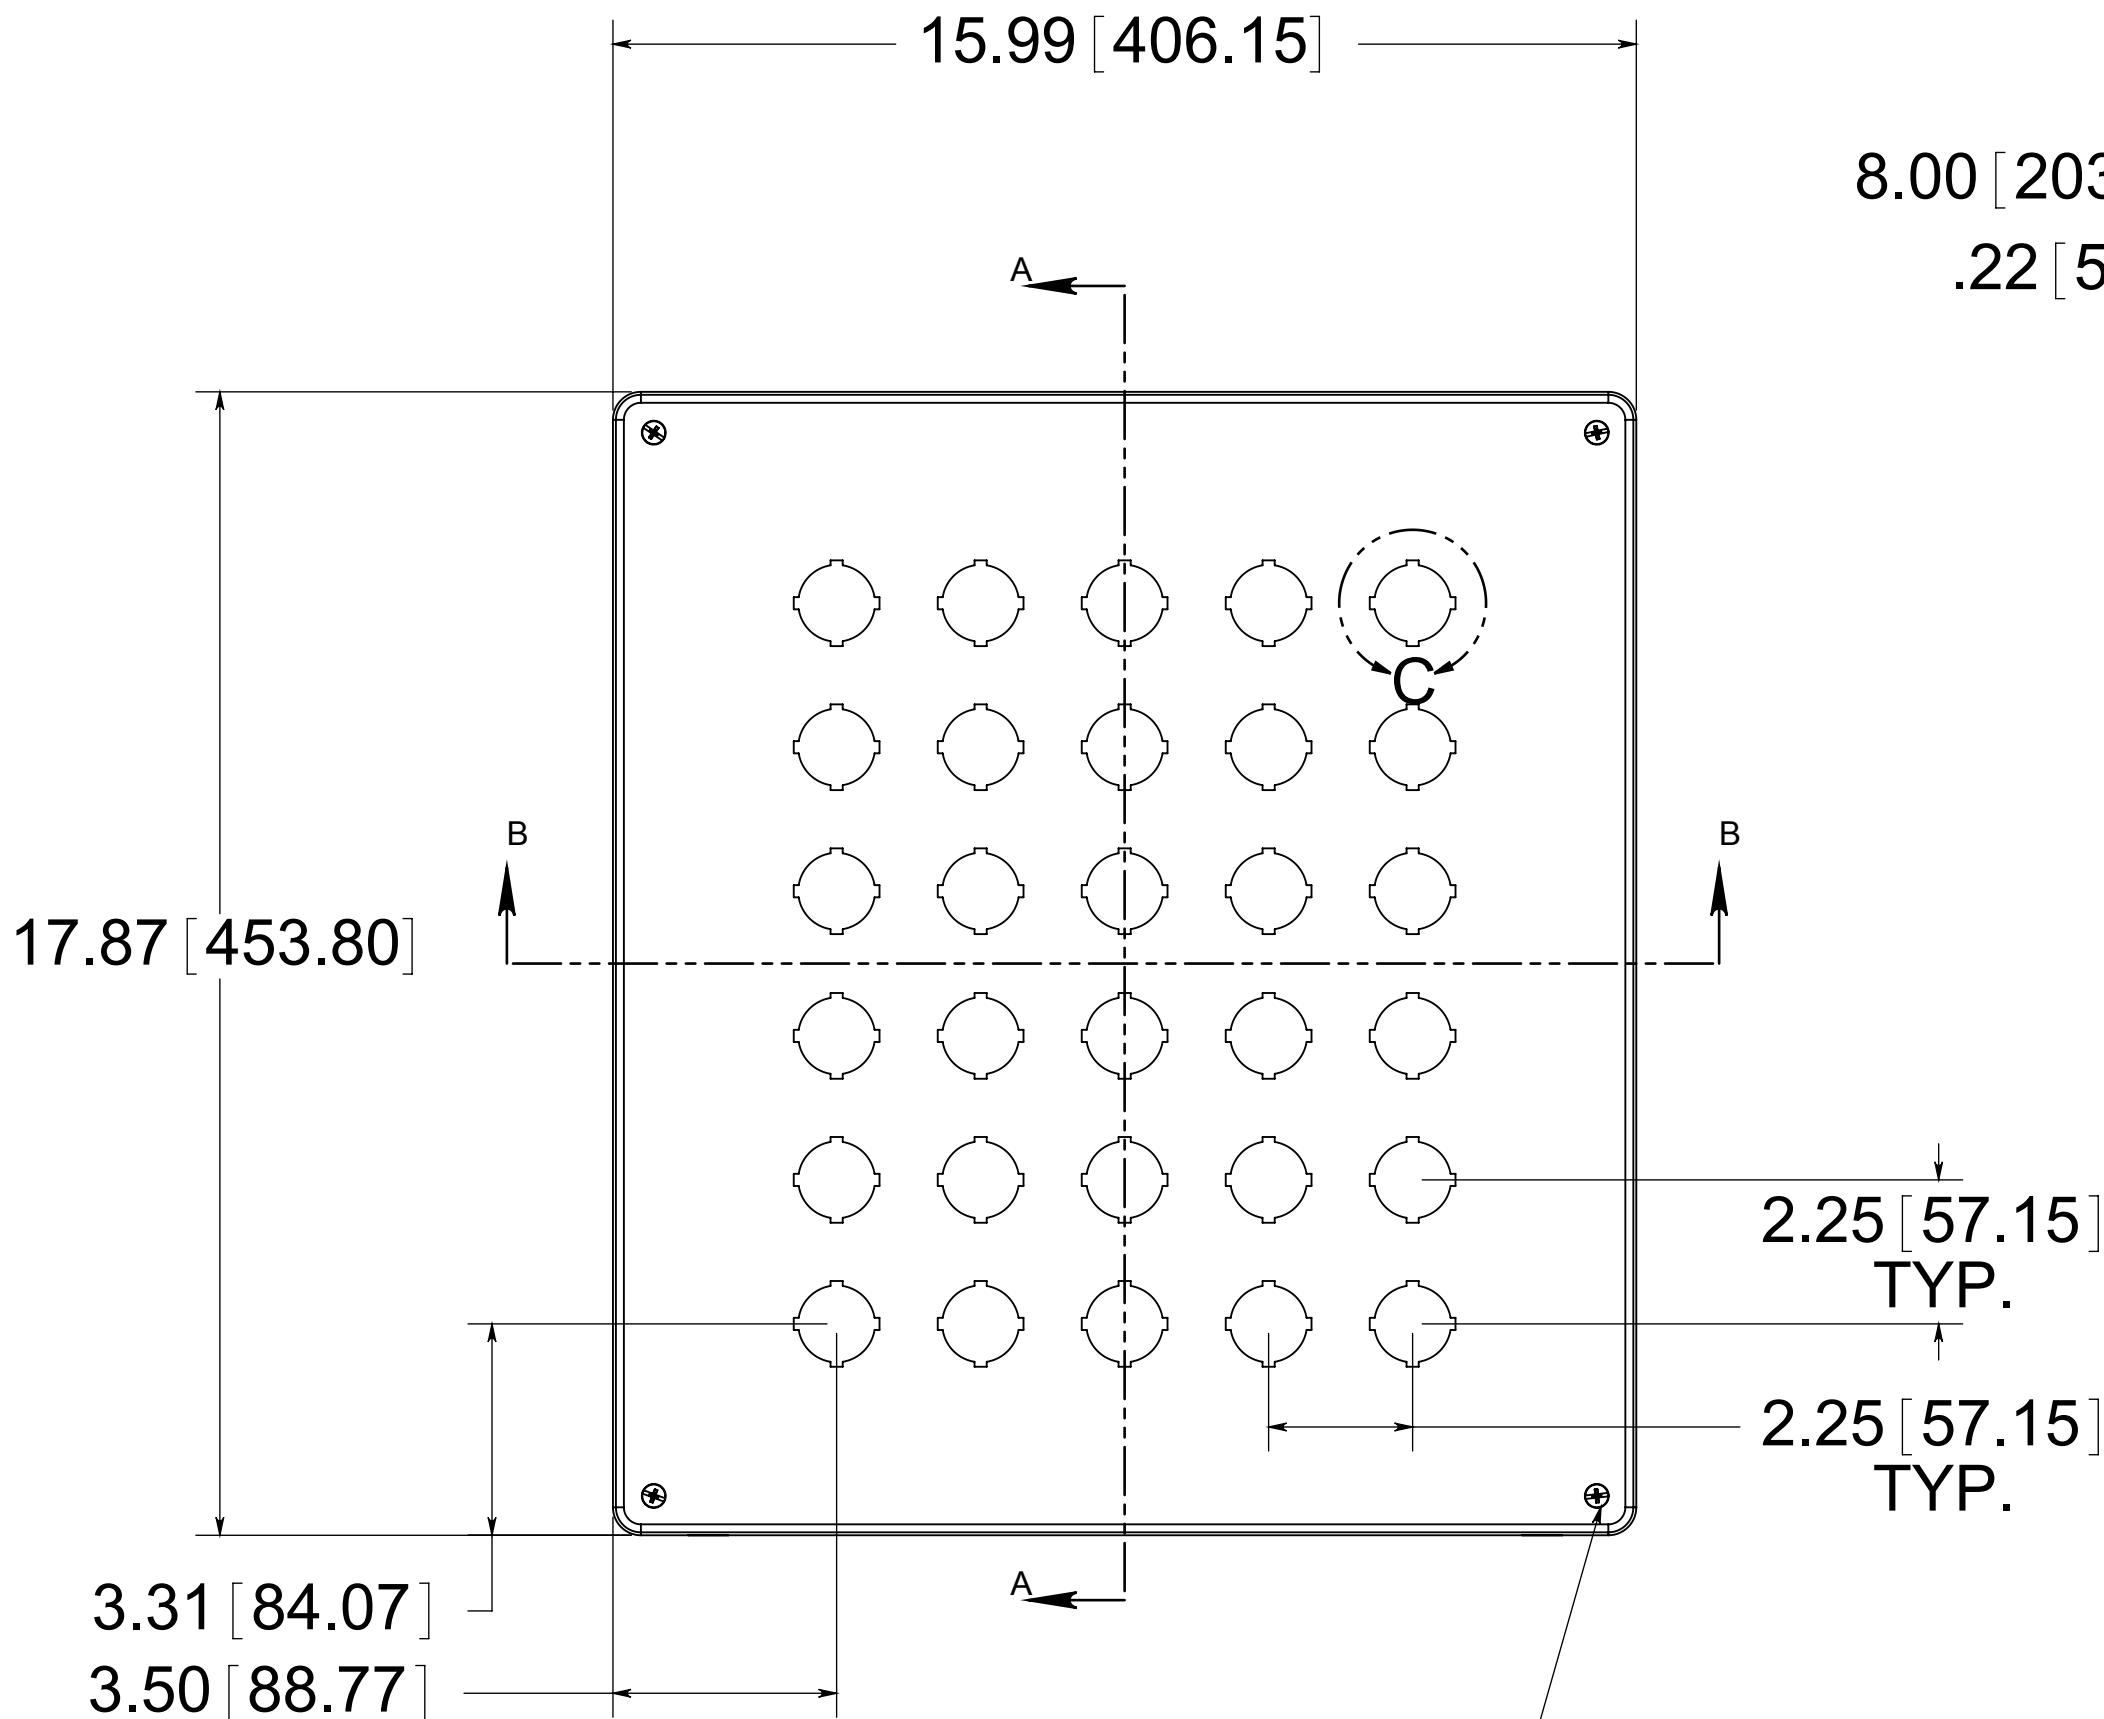

(4) EACH #10-32 BRASS INSERTS AND STAINLESS STEEL CAPTIVE COVER SCREWS WITH RETAINING O-RING

8.00 [203.20]
.22 [5.59]

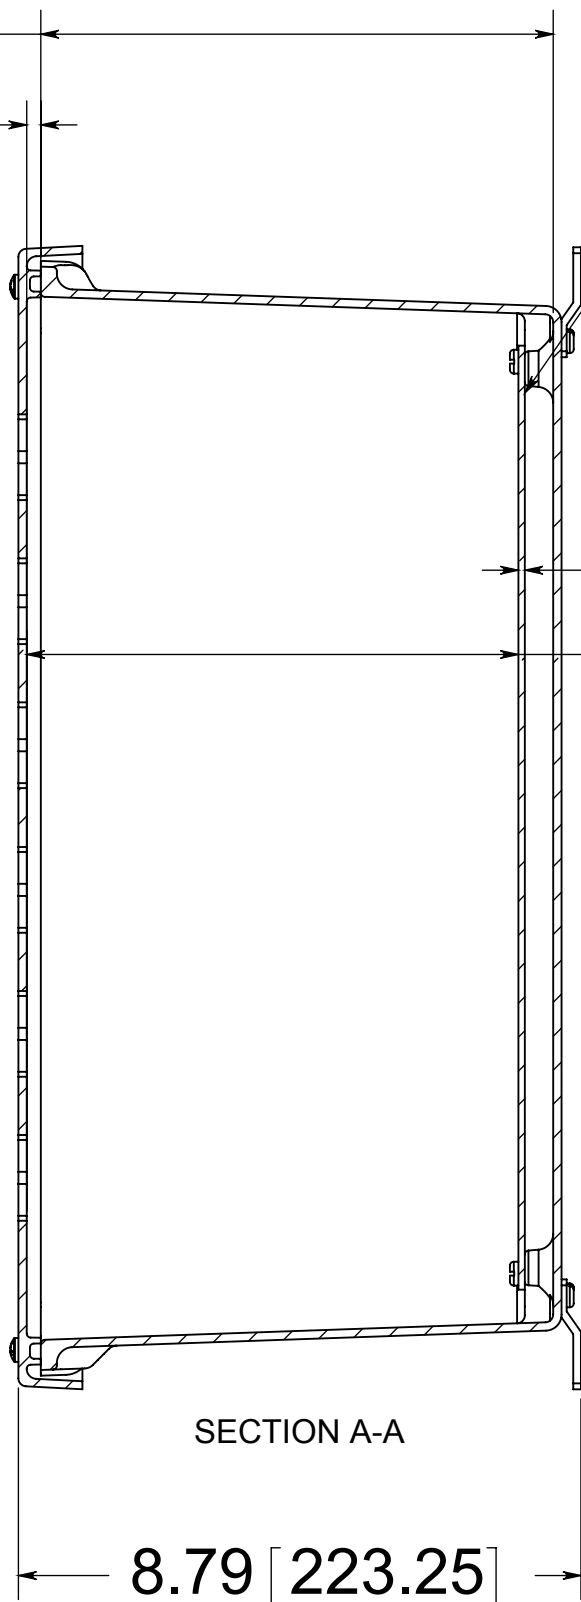


OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL & GALVANNEALED
0.125 [3.18] TH'K- FIBERGLASS

(4) STAINLESS STEEL MOUNTING FEET


(4) EACH #10-32 BRASS INSERTS, AND STAINLESS STEEL FEET SCREWS

(4) Ø.34 [8.74]

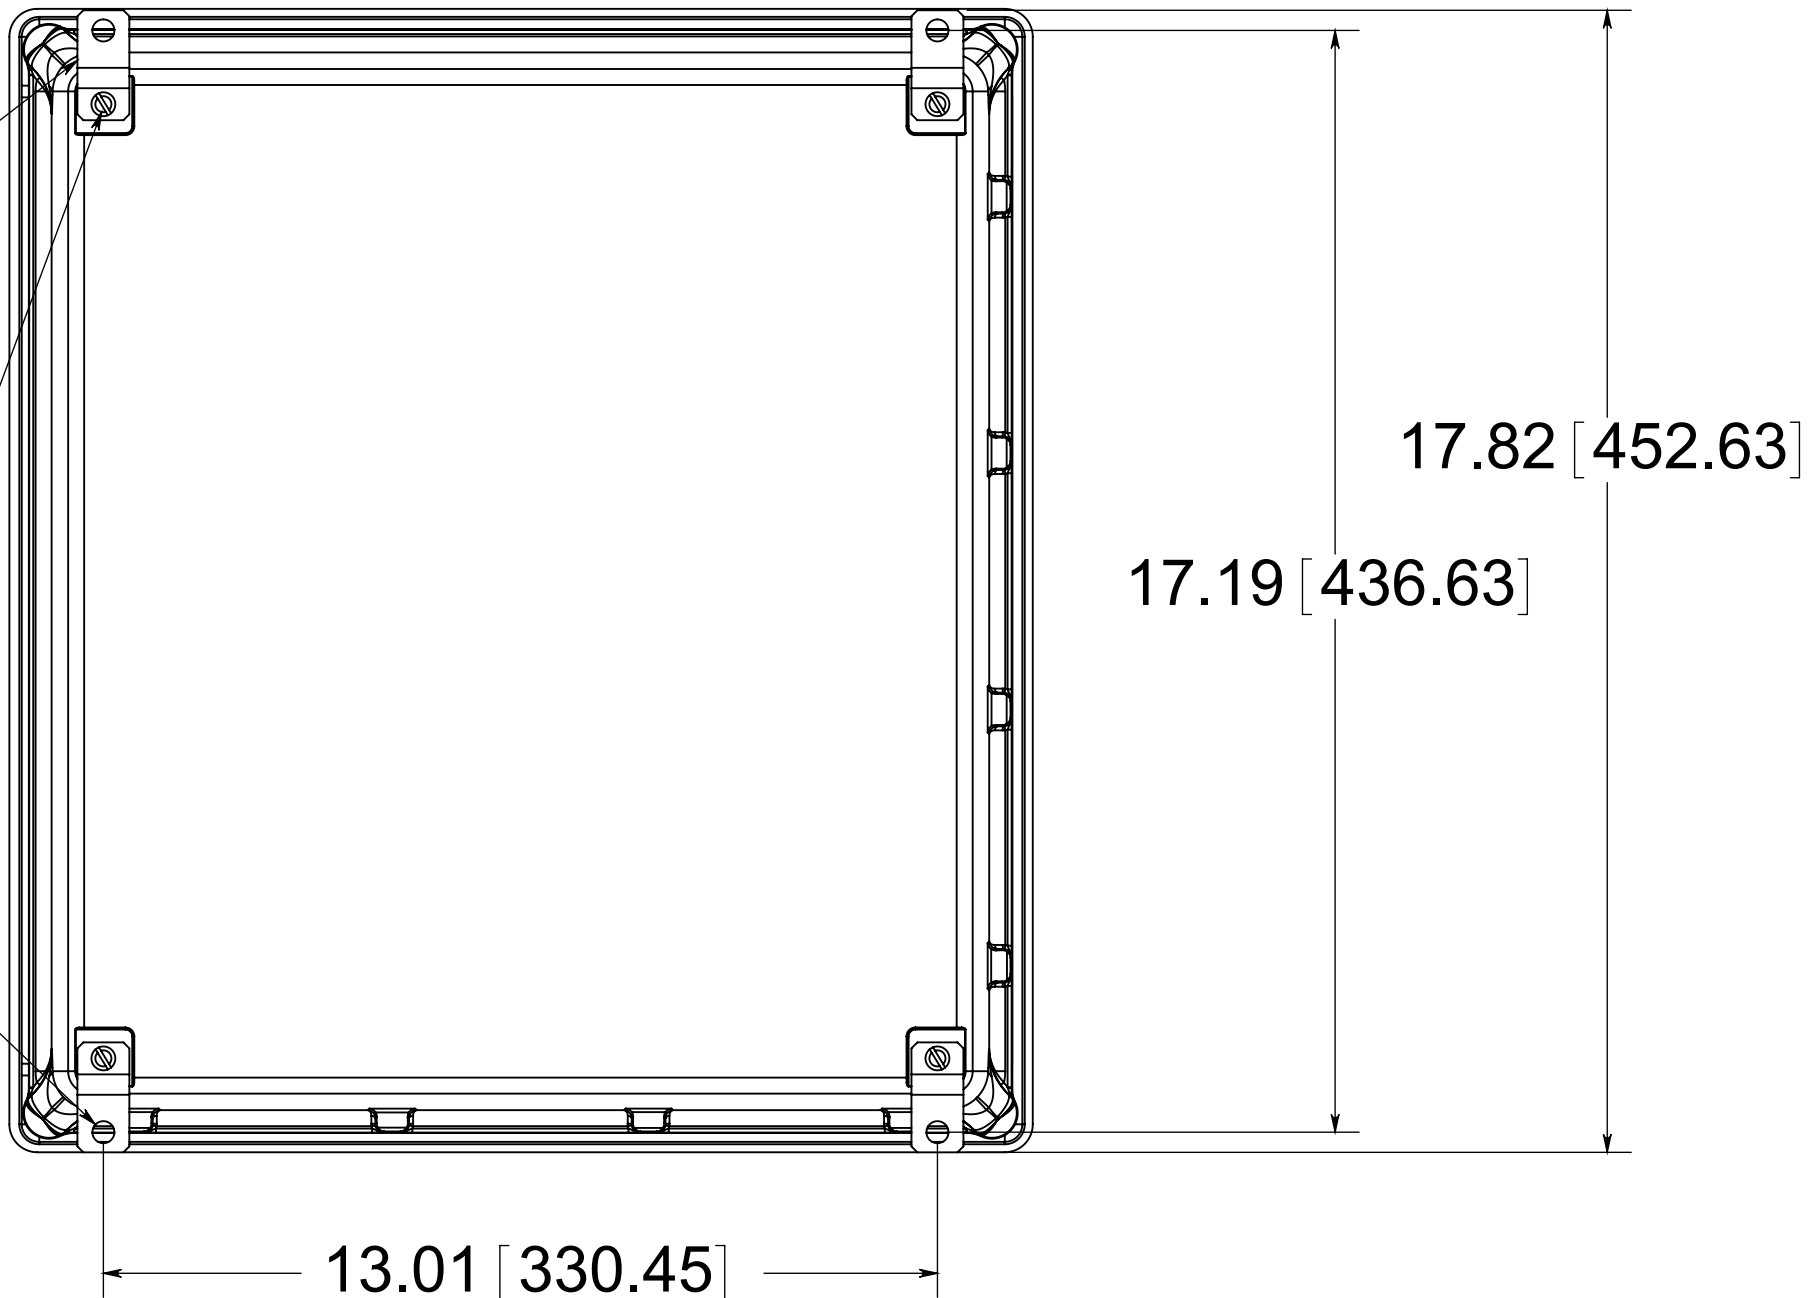

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL SHOWN

CLOSED CELL
NEOPRENE
GASKET

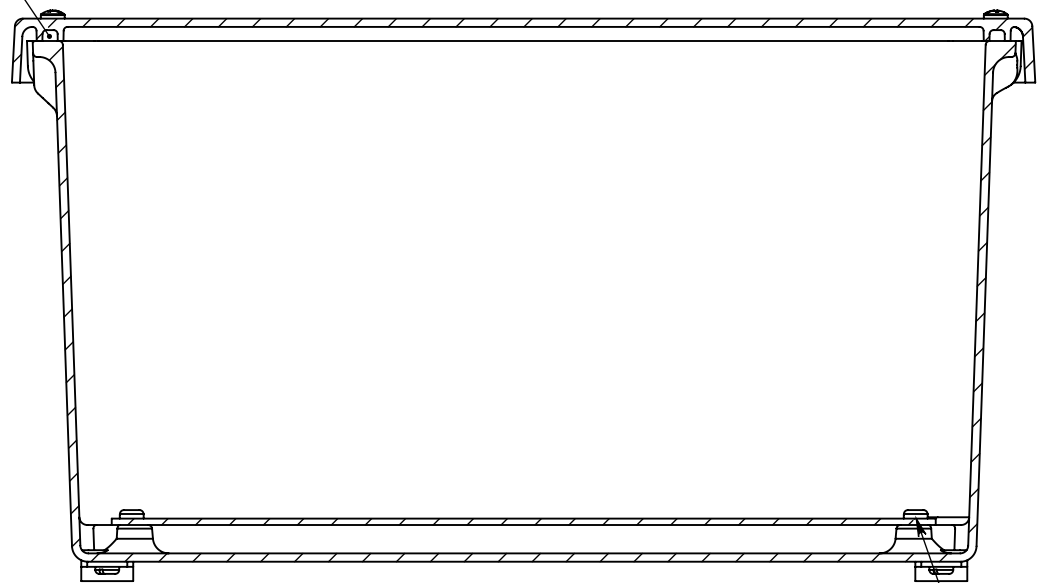


SECTION B-B

(4) EACH #10-32 BRASS INSERTS AND PLATED CARBON STEEL SCREWS

.47 [11.98]

12.88 [327.03]

14.75 [374.65]

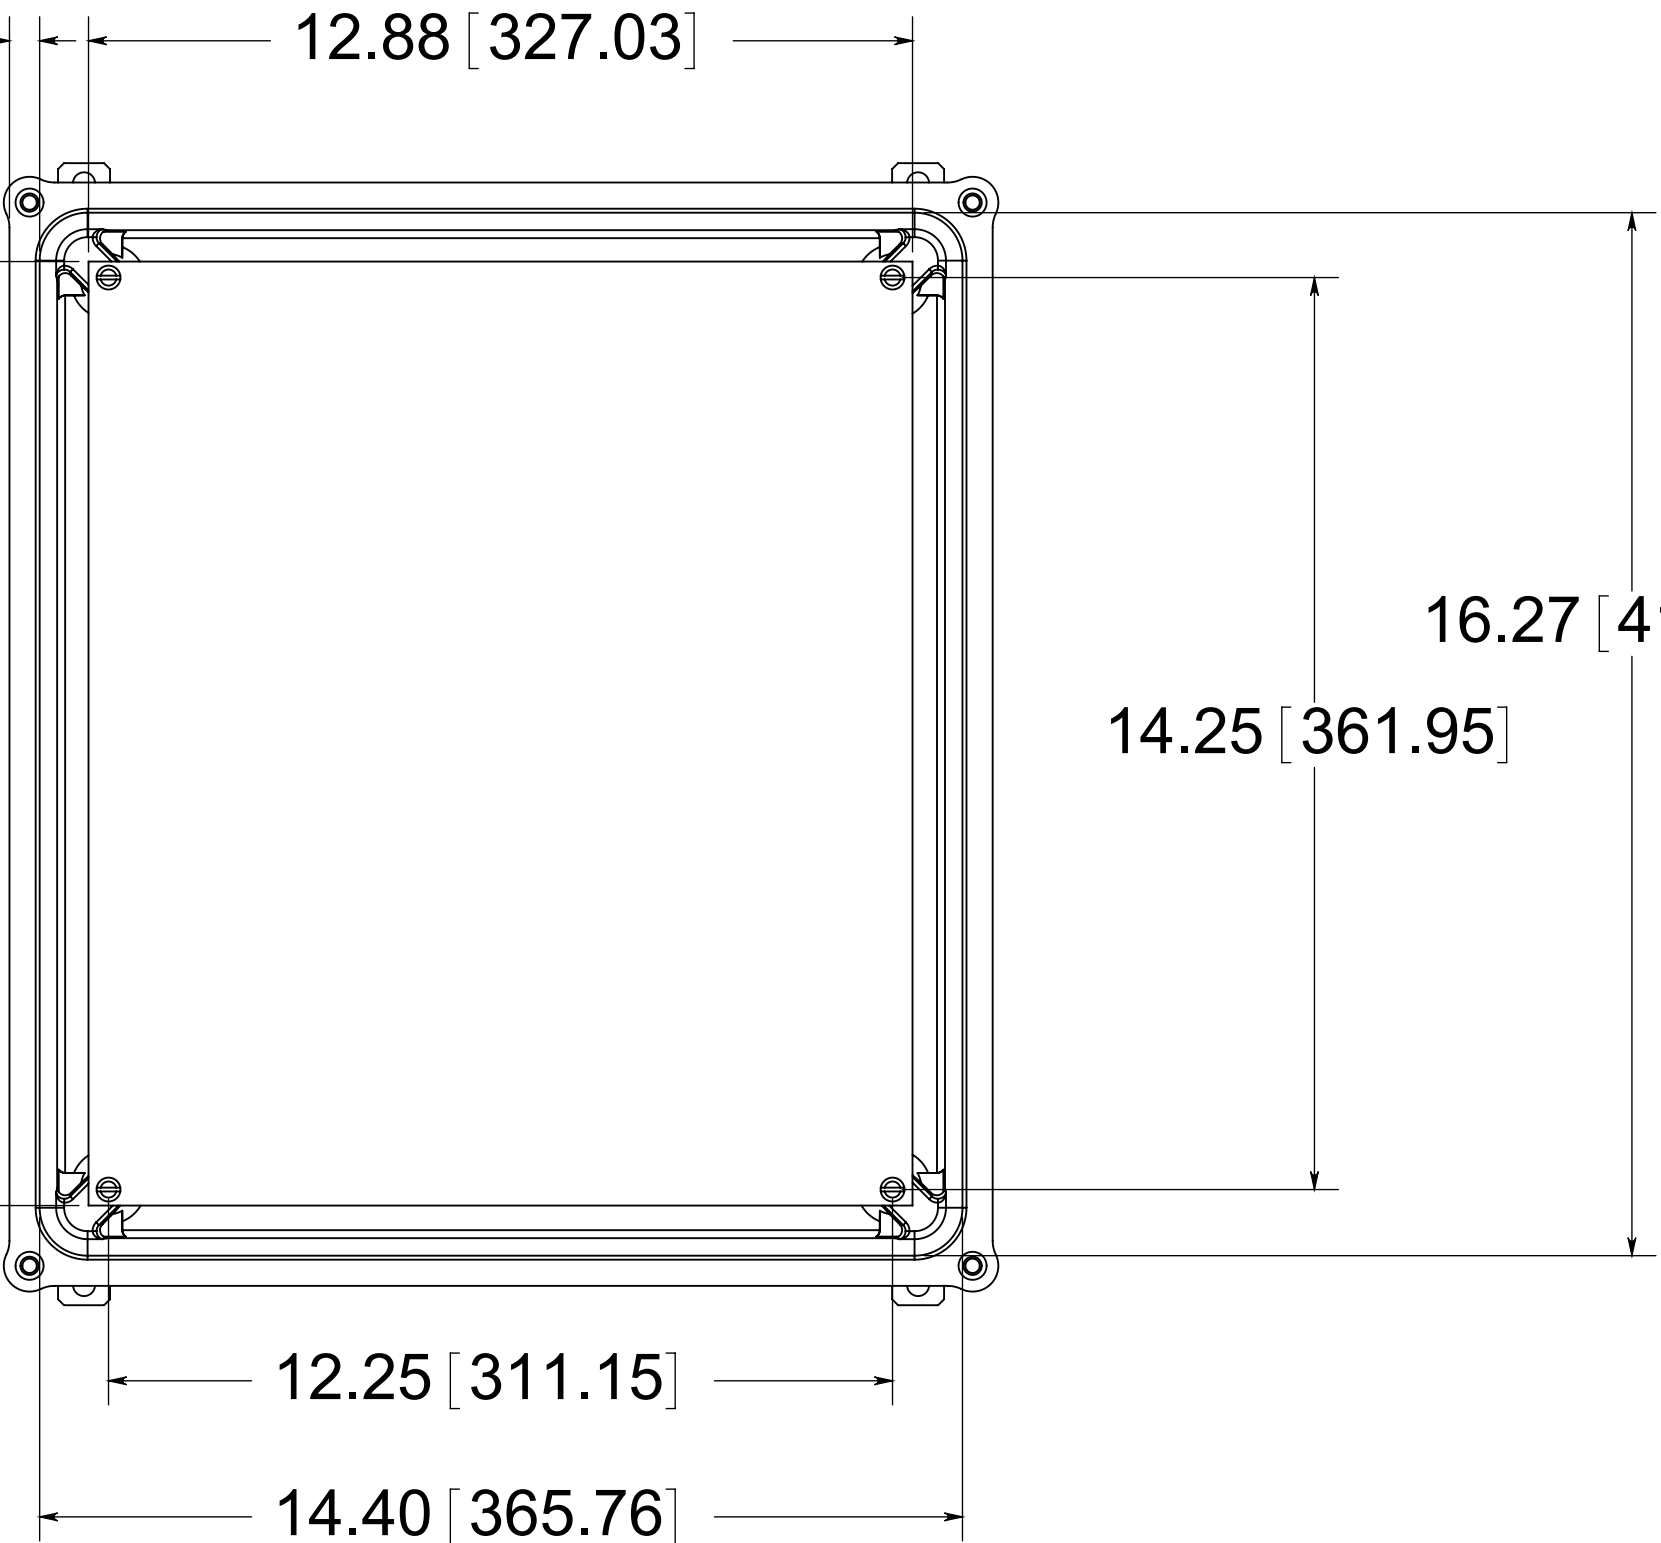


12.25 [311.15]

14.40 [365.76]

16.27 [413.26]


14.25 [361.95]

30.5mm HOLE
DETAIL

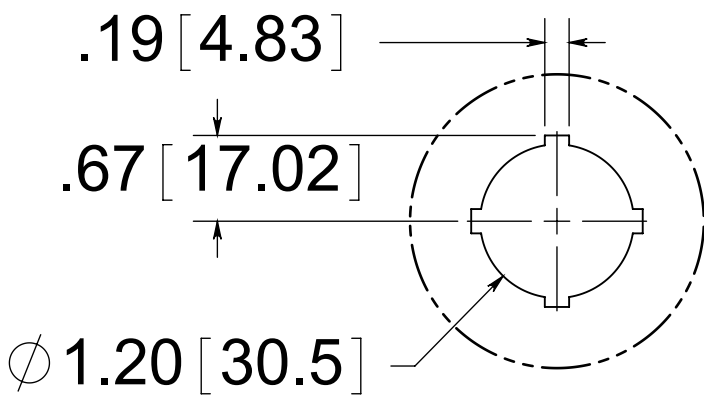

DETAIL C
SCALE 2 : 3

MATERIAL:
BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOWS- POLYCARBONATE

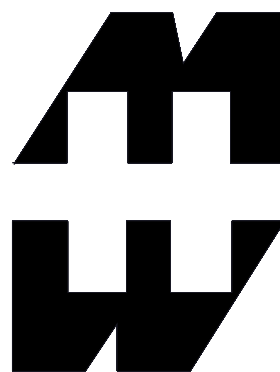

PART No. PJ1648P30
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale