



DATE	SYM.	DESCRIPTION	DR	CK	REL

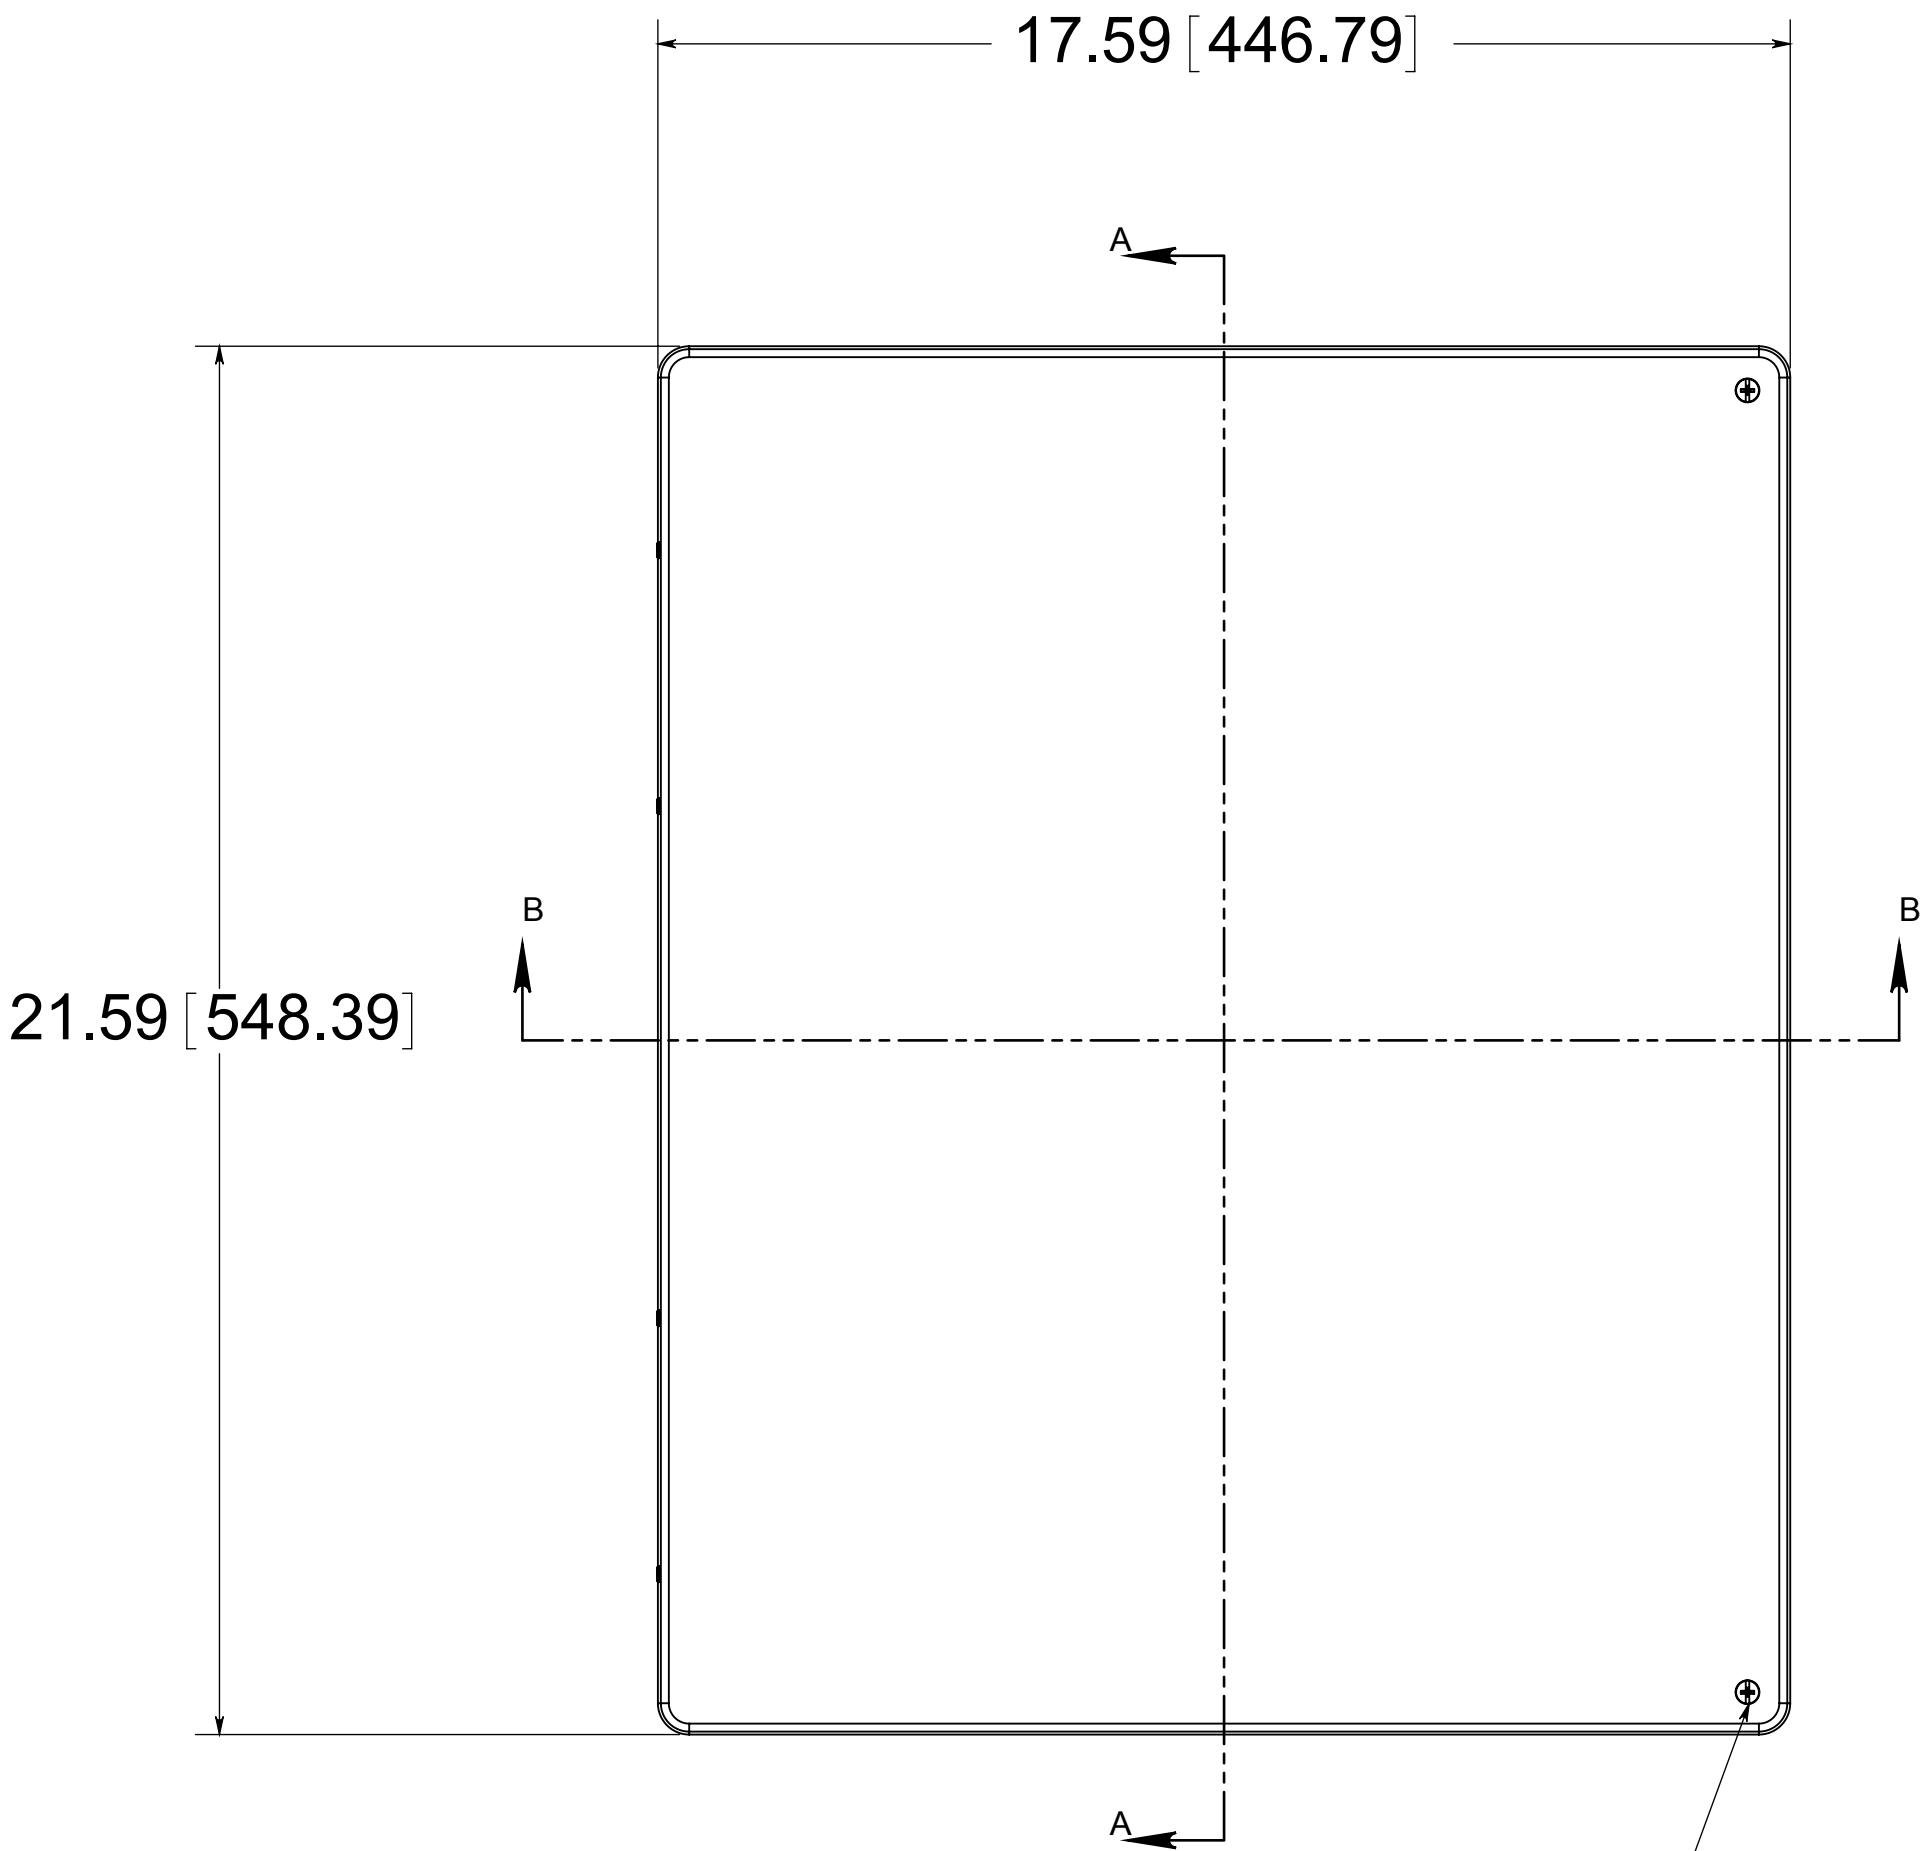

(2) EACH #10-32 BRASS INSERTS
AND STAINLESS STEEL
CAPTIVE COVER SCREWS
WITH RETAINING O-RING

CLOSED CELL
NEOPRENE
GASKET


S. ST'L HINGE

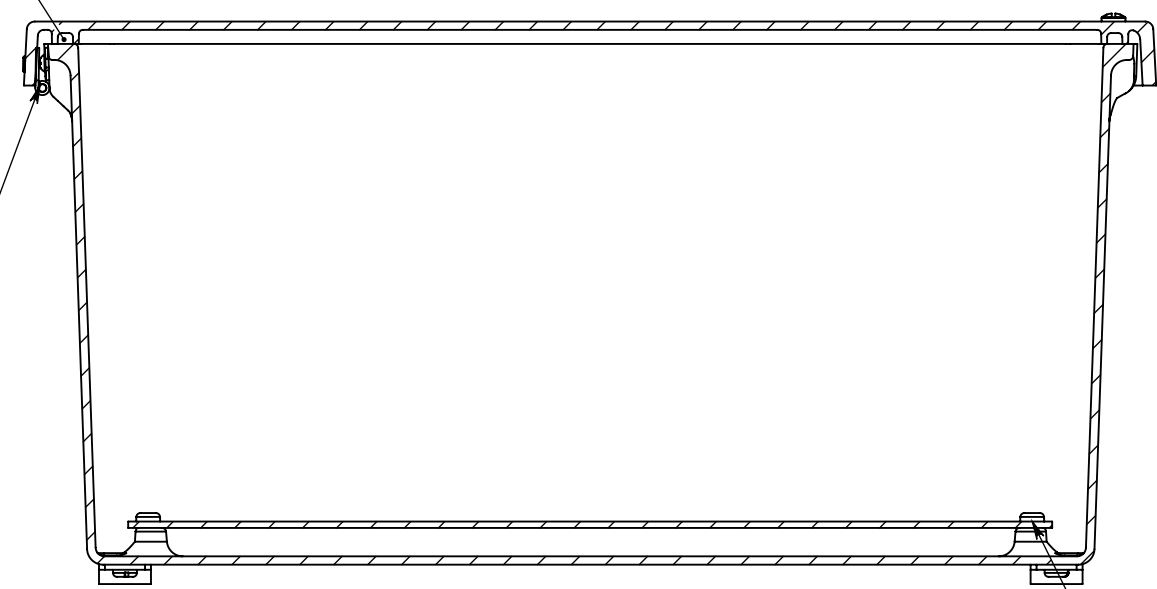

SECTION B-B

(4) EACH #10-32 BRASS
INSERTS AND PLATED
CARBON STEEL SCREWS

MATERIAL:
BOX-COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOW- POLYCARBONATE

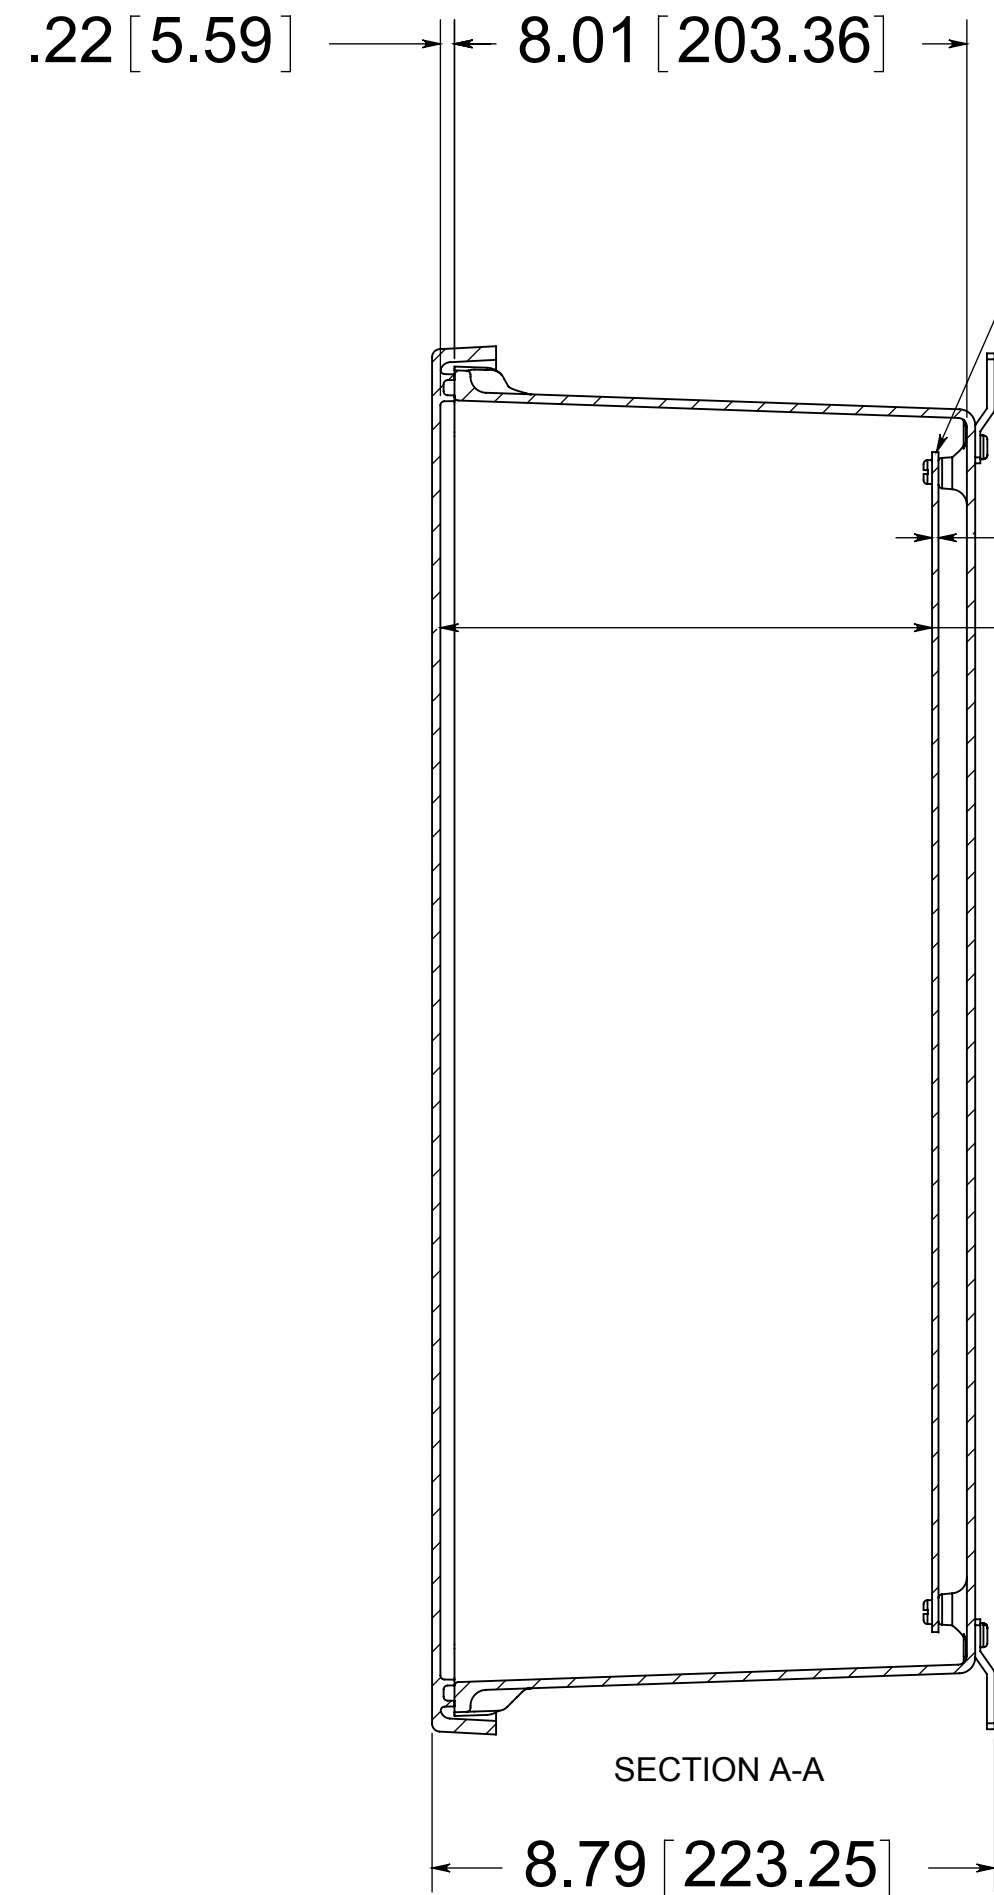


SECTION A-A

OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL & GALVANNEALED
0.125 [3.18] TH'K- FIBERGLASS



(4) STAINLESS STEEL
MOUNTING FEET

(4) EACH #10-32 BRASS
INSERTS, AND STAINLESS
STEEL FEET SCREWS

(4) ϕ .34 [8.74]

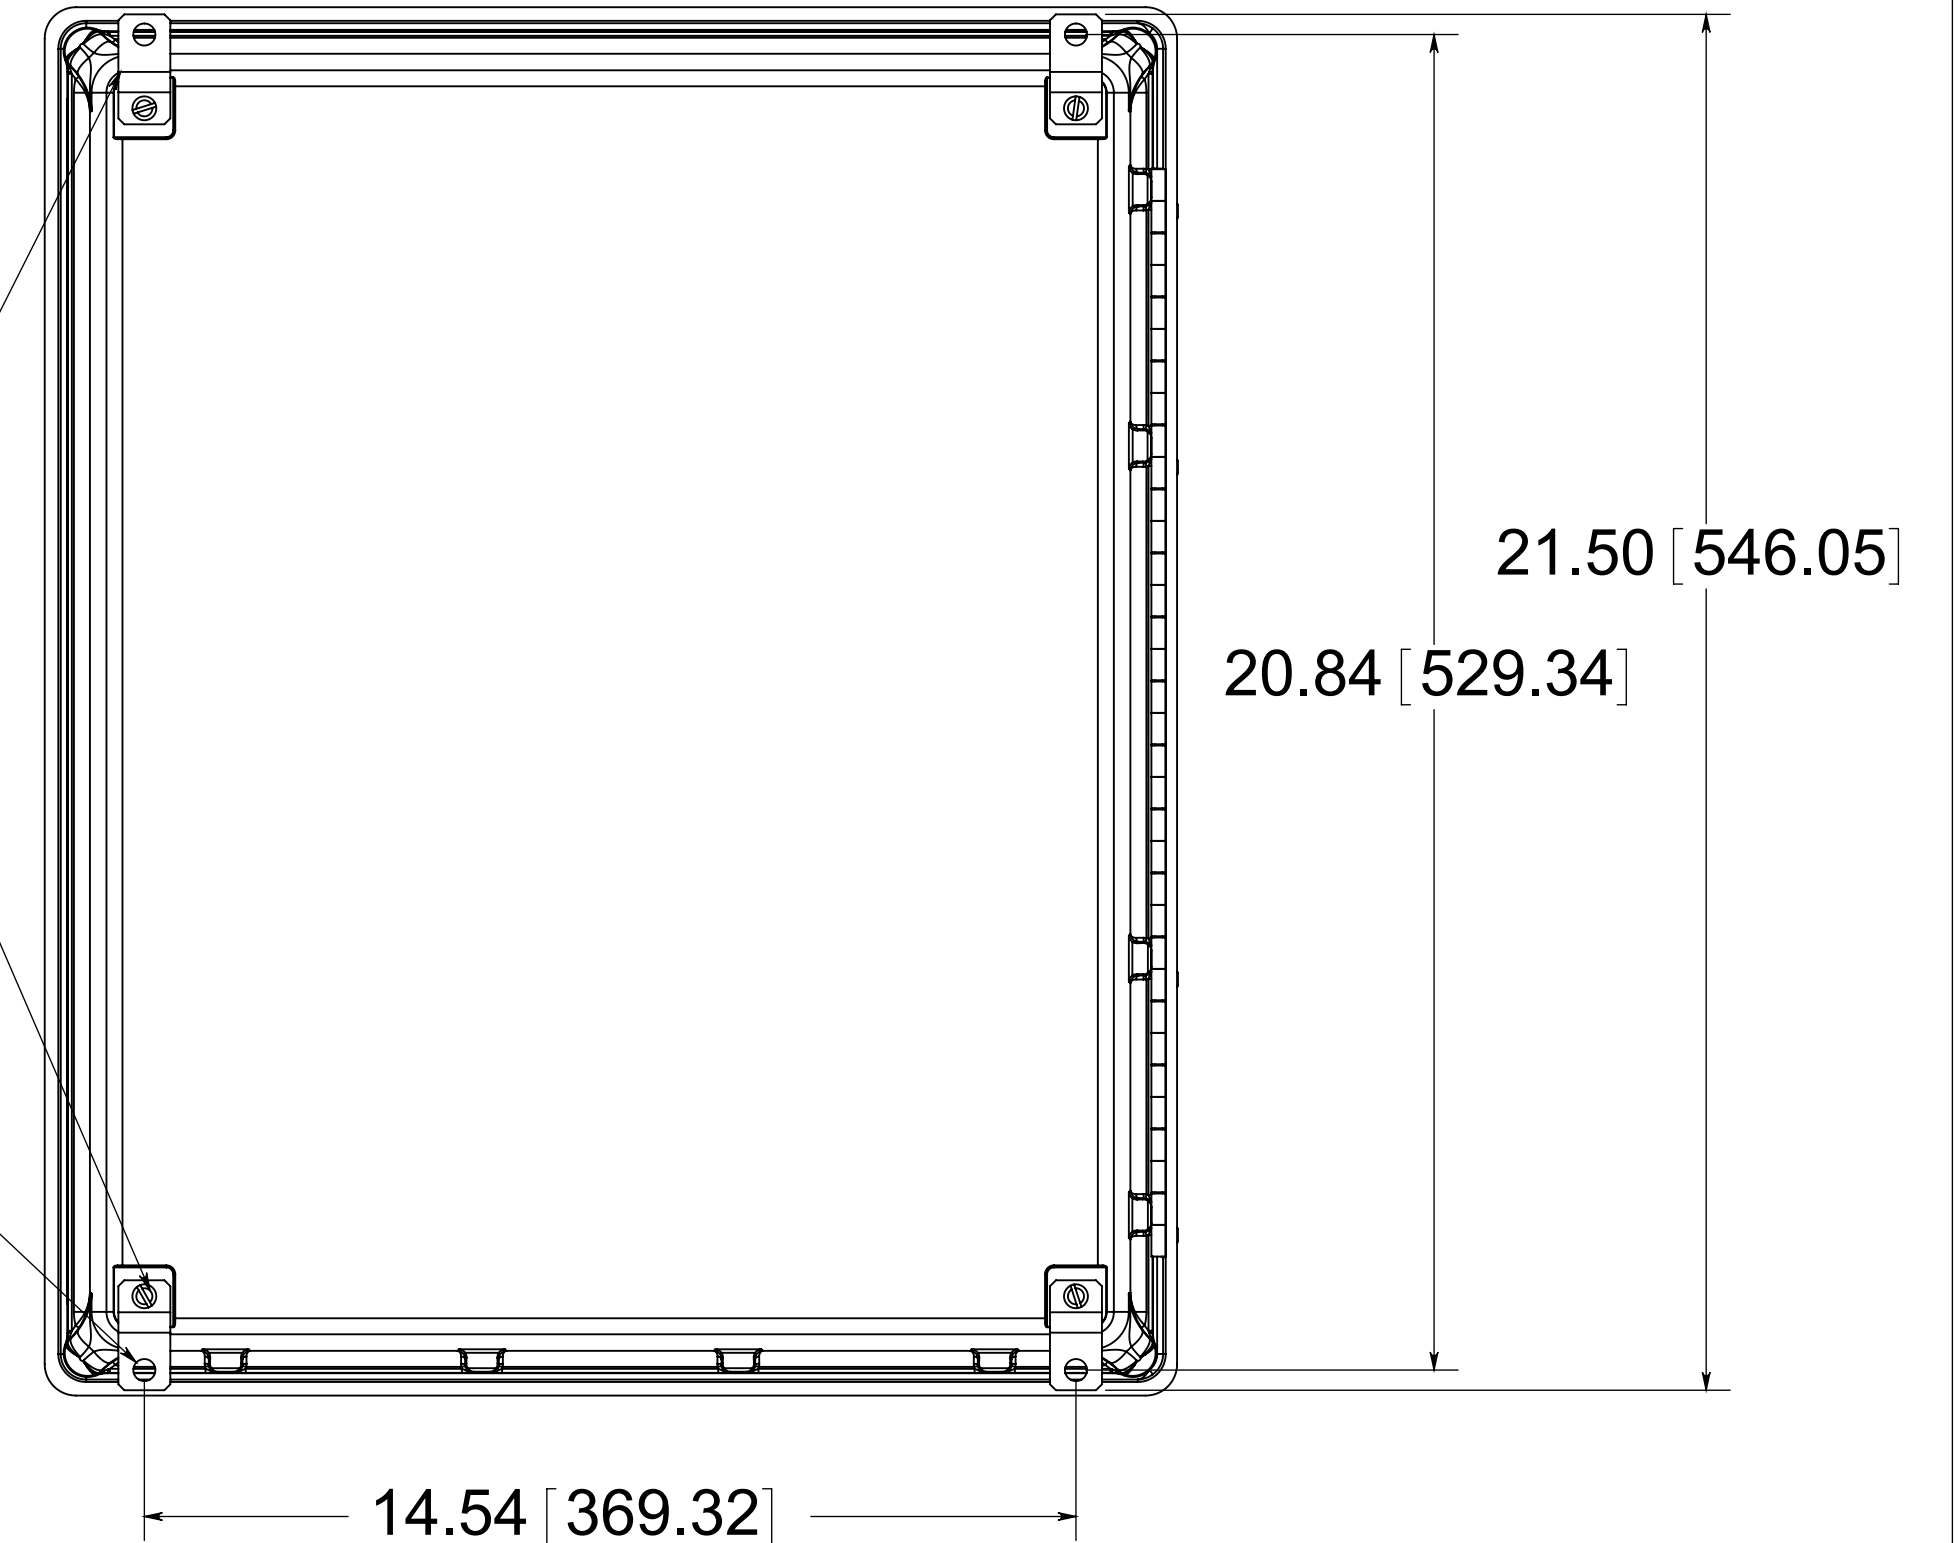

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL SHOWN

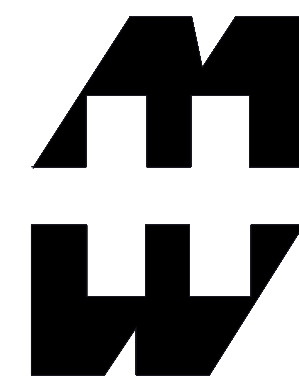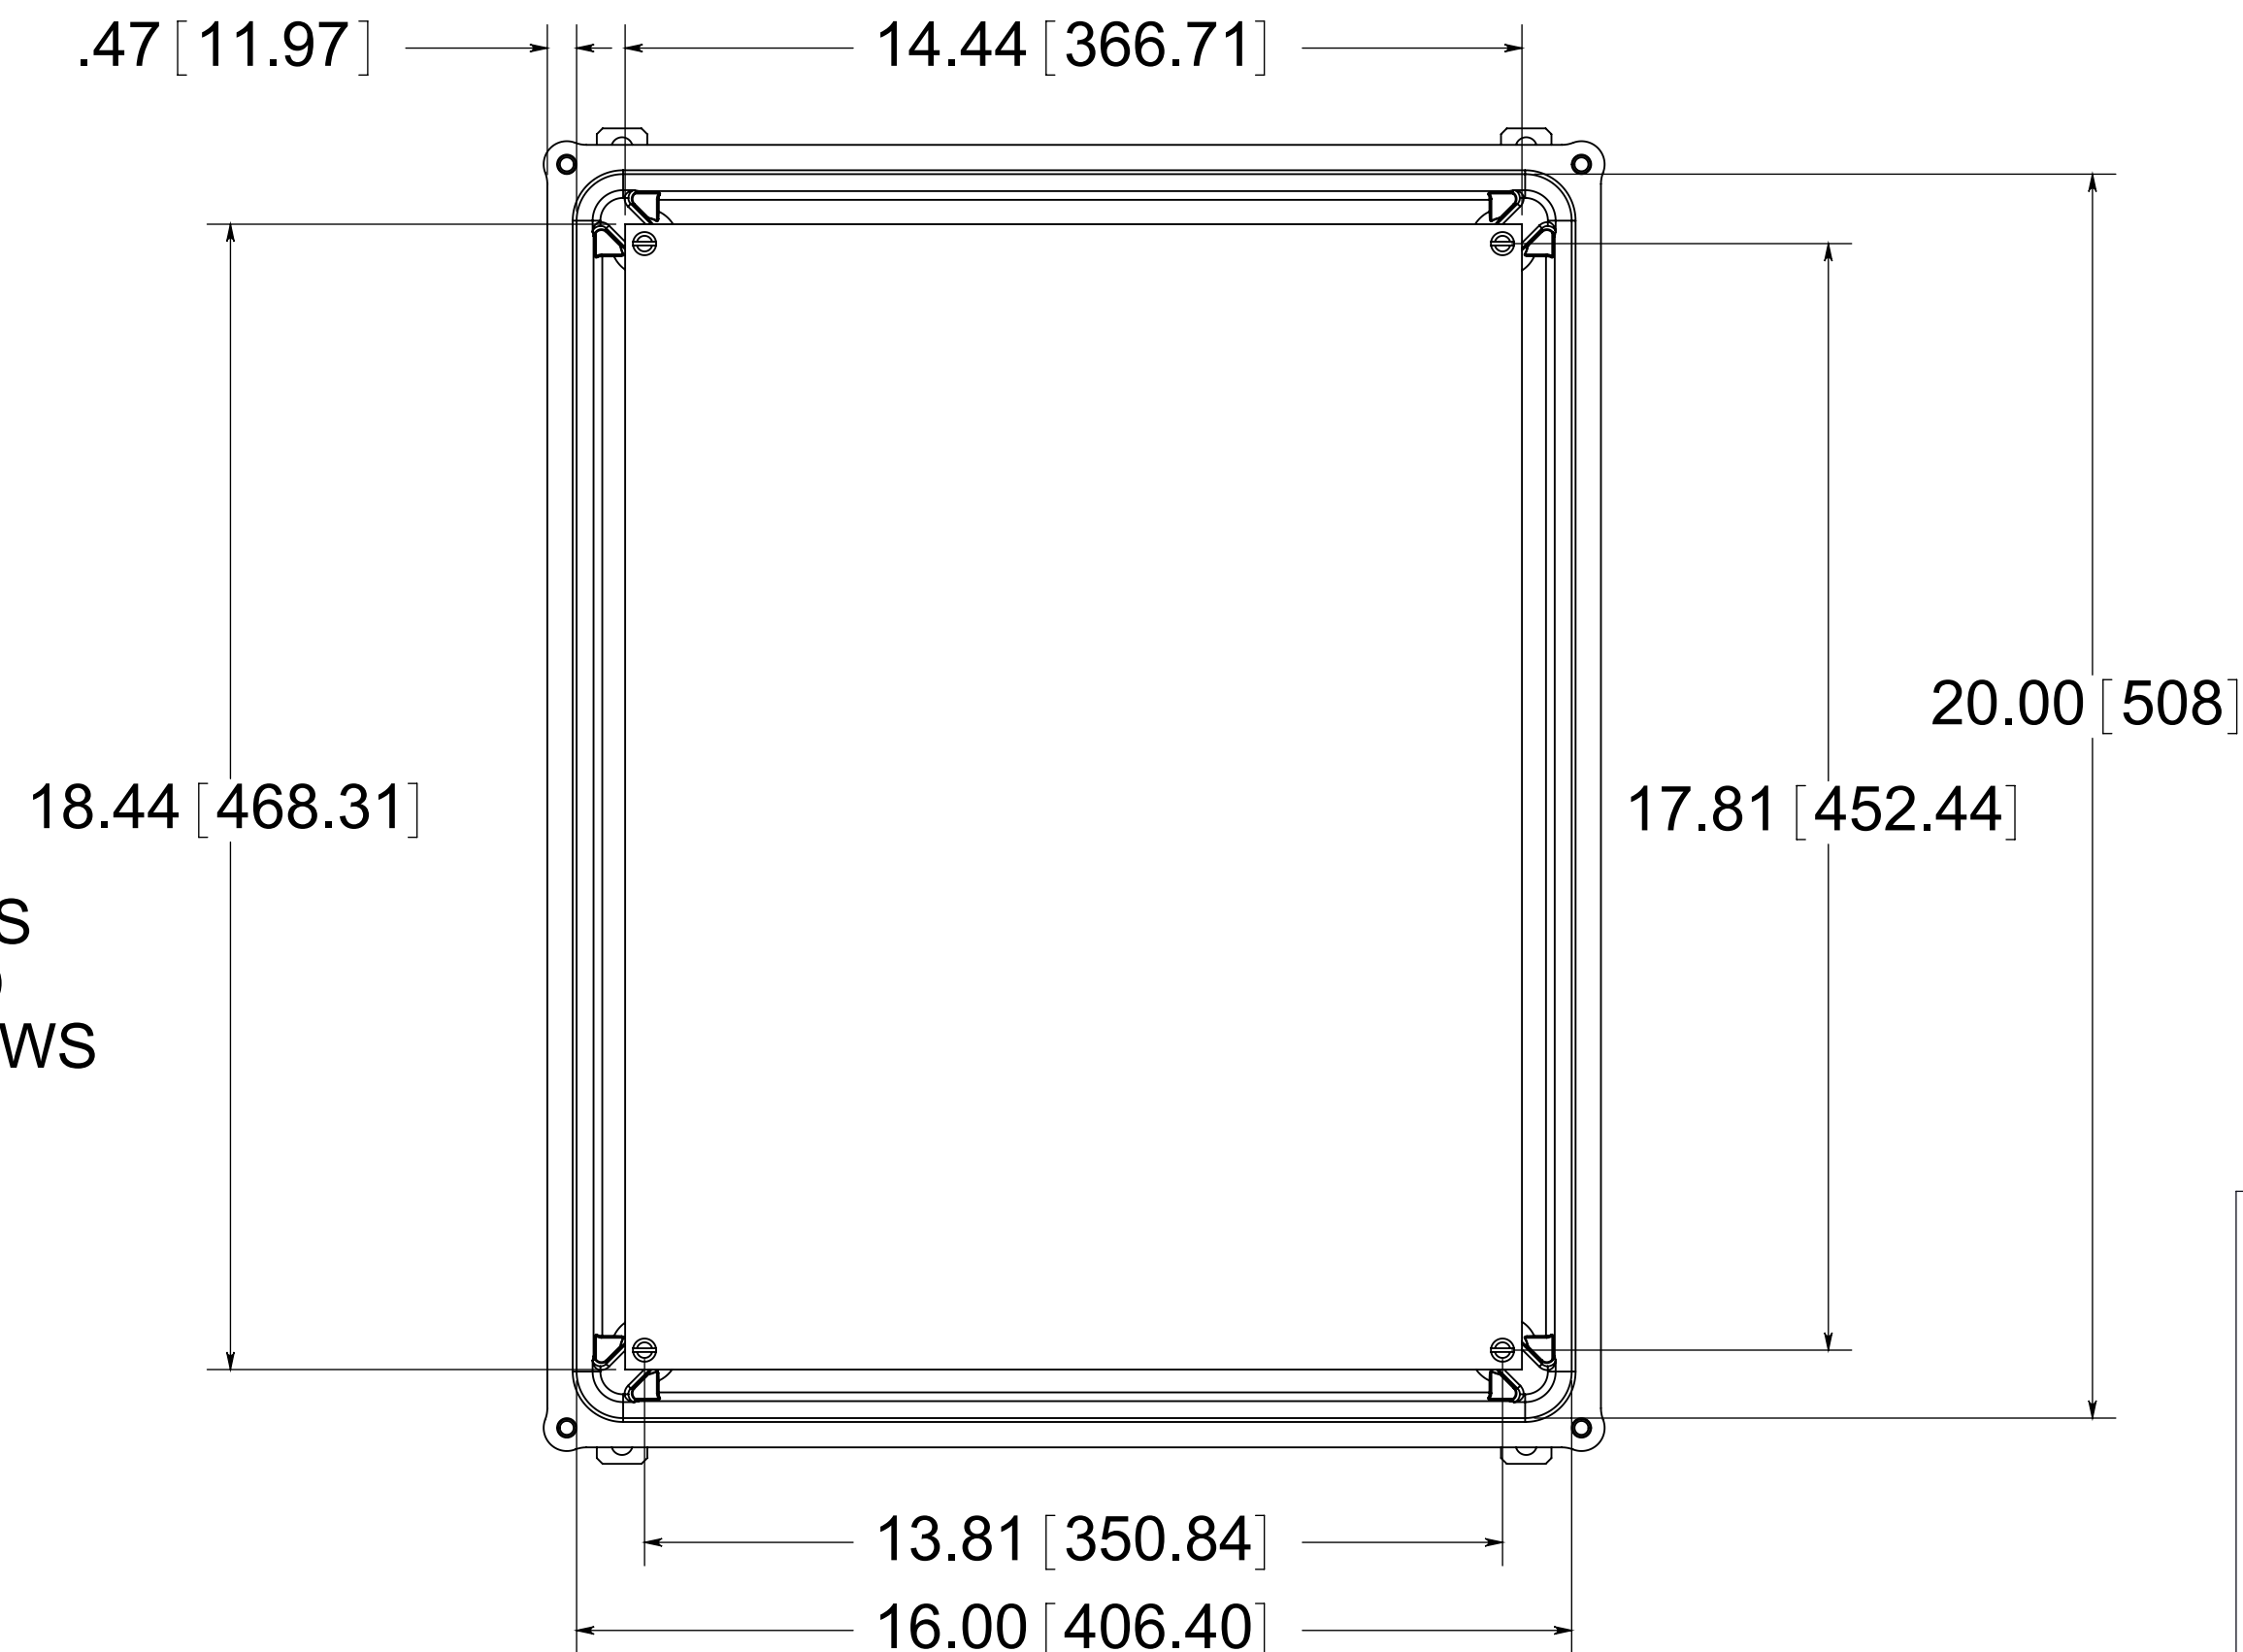

PART No. PJ2068H
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale