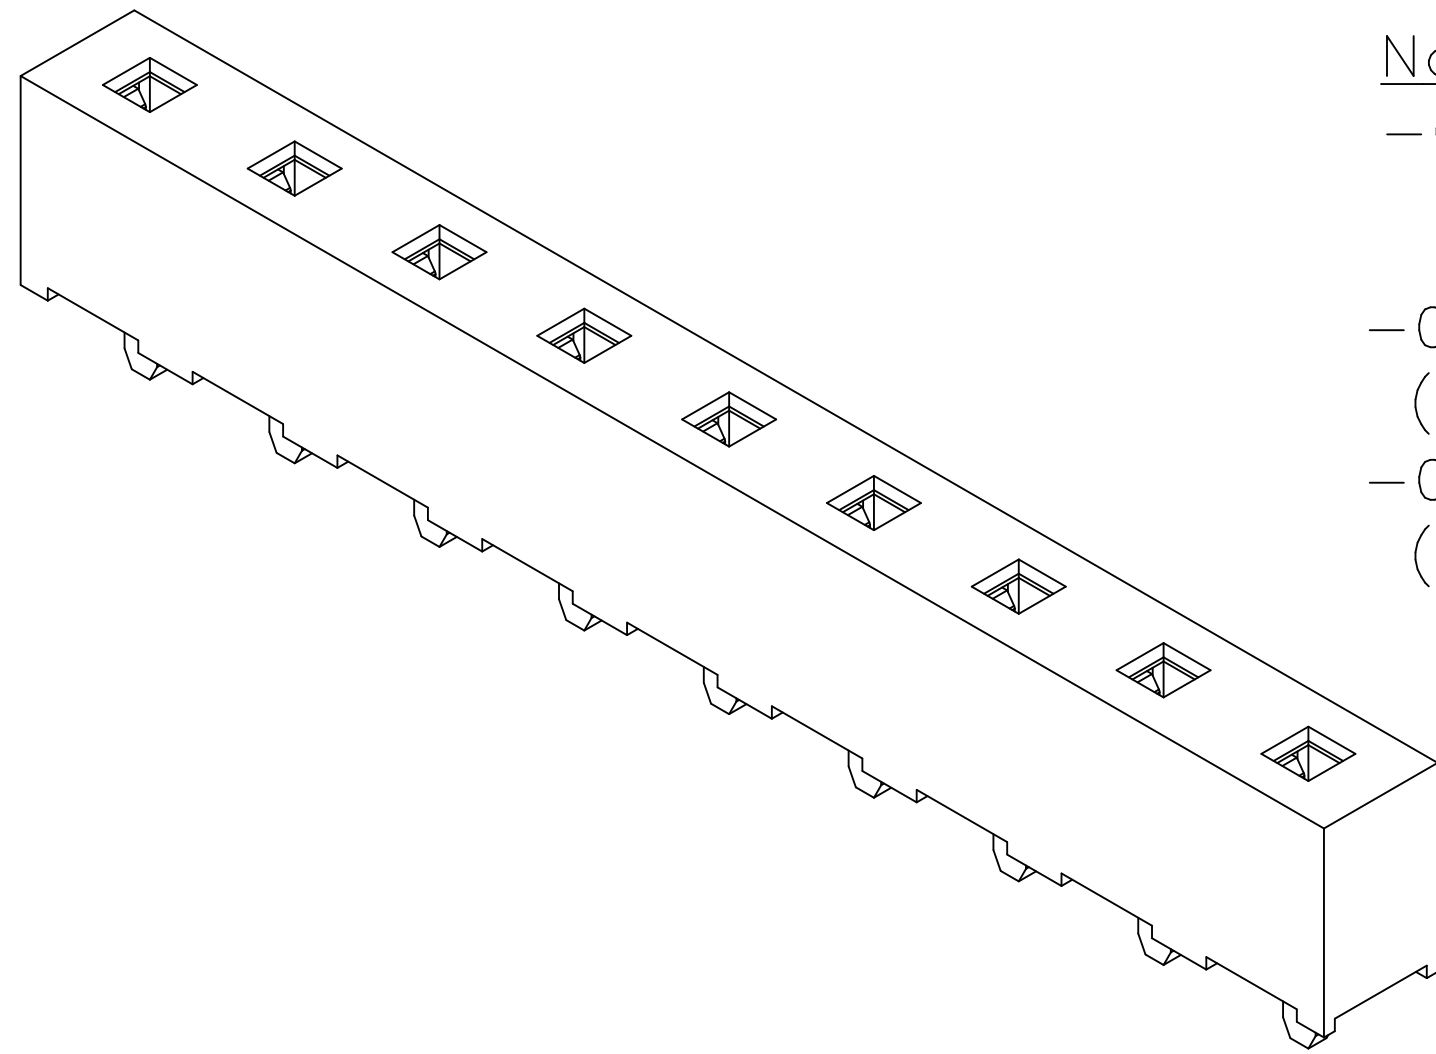
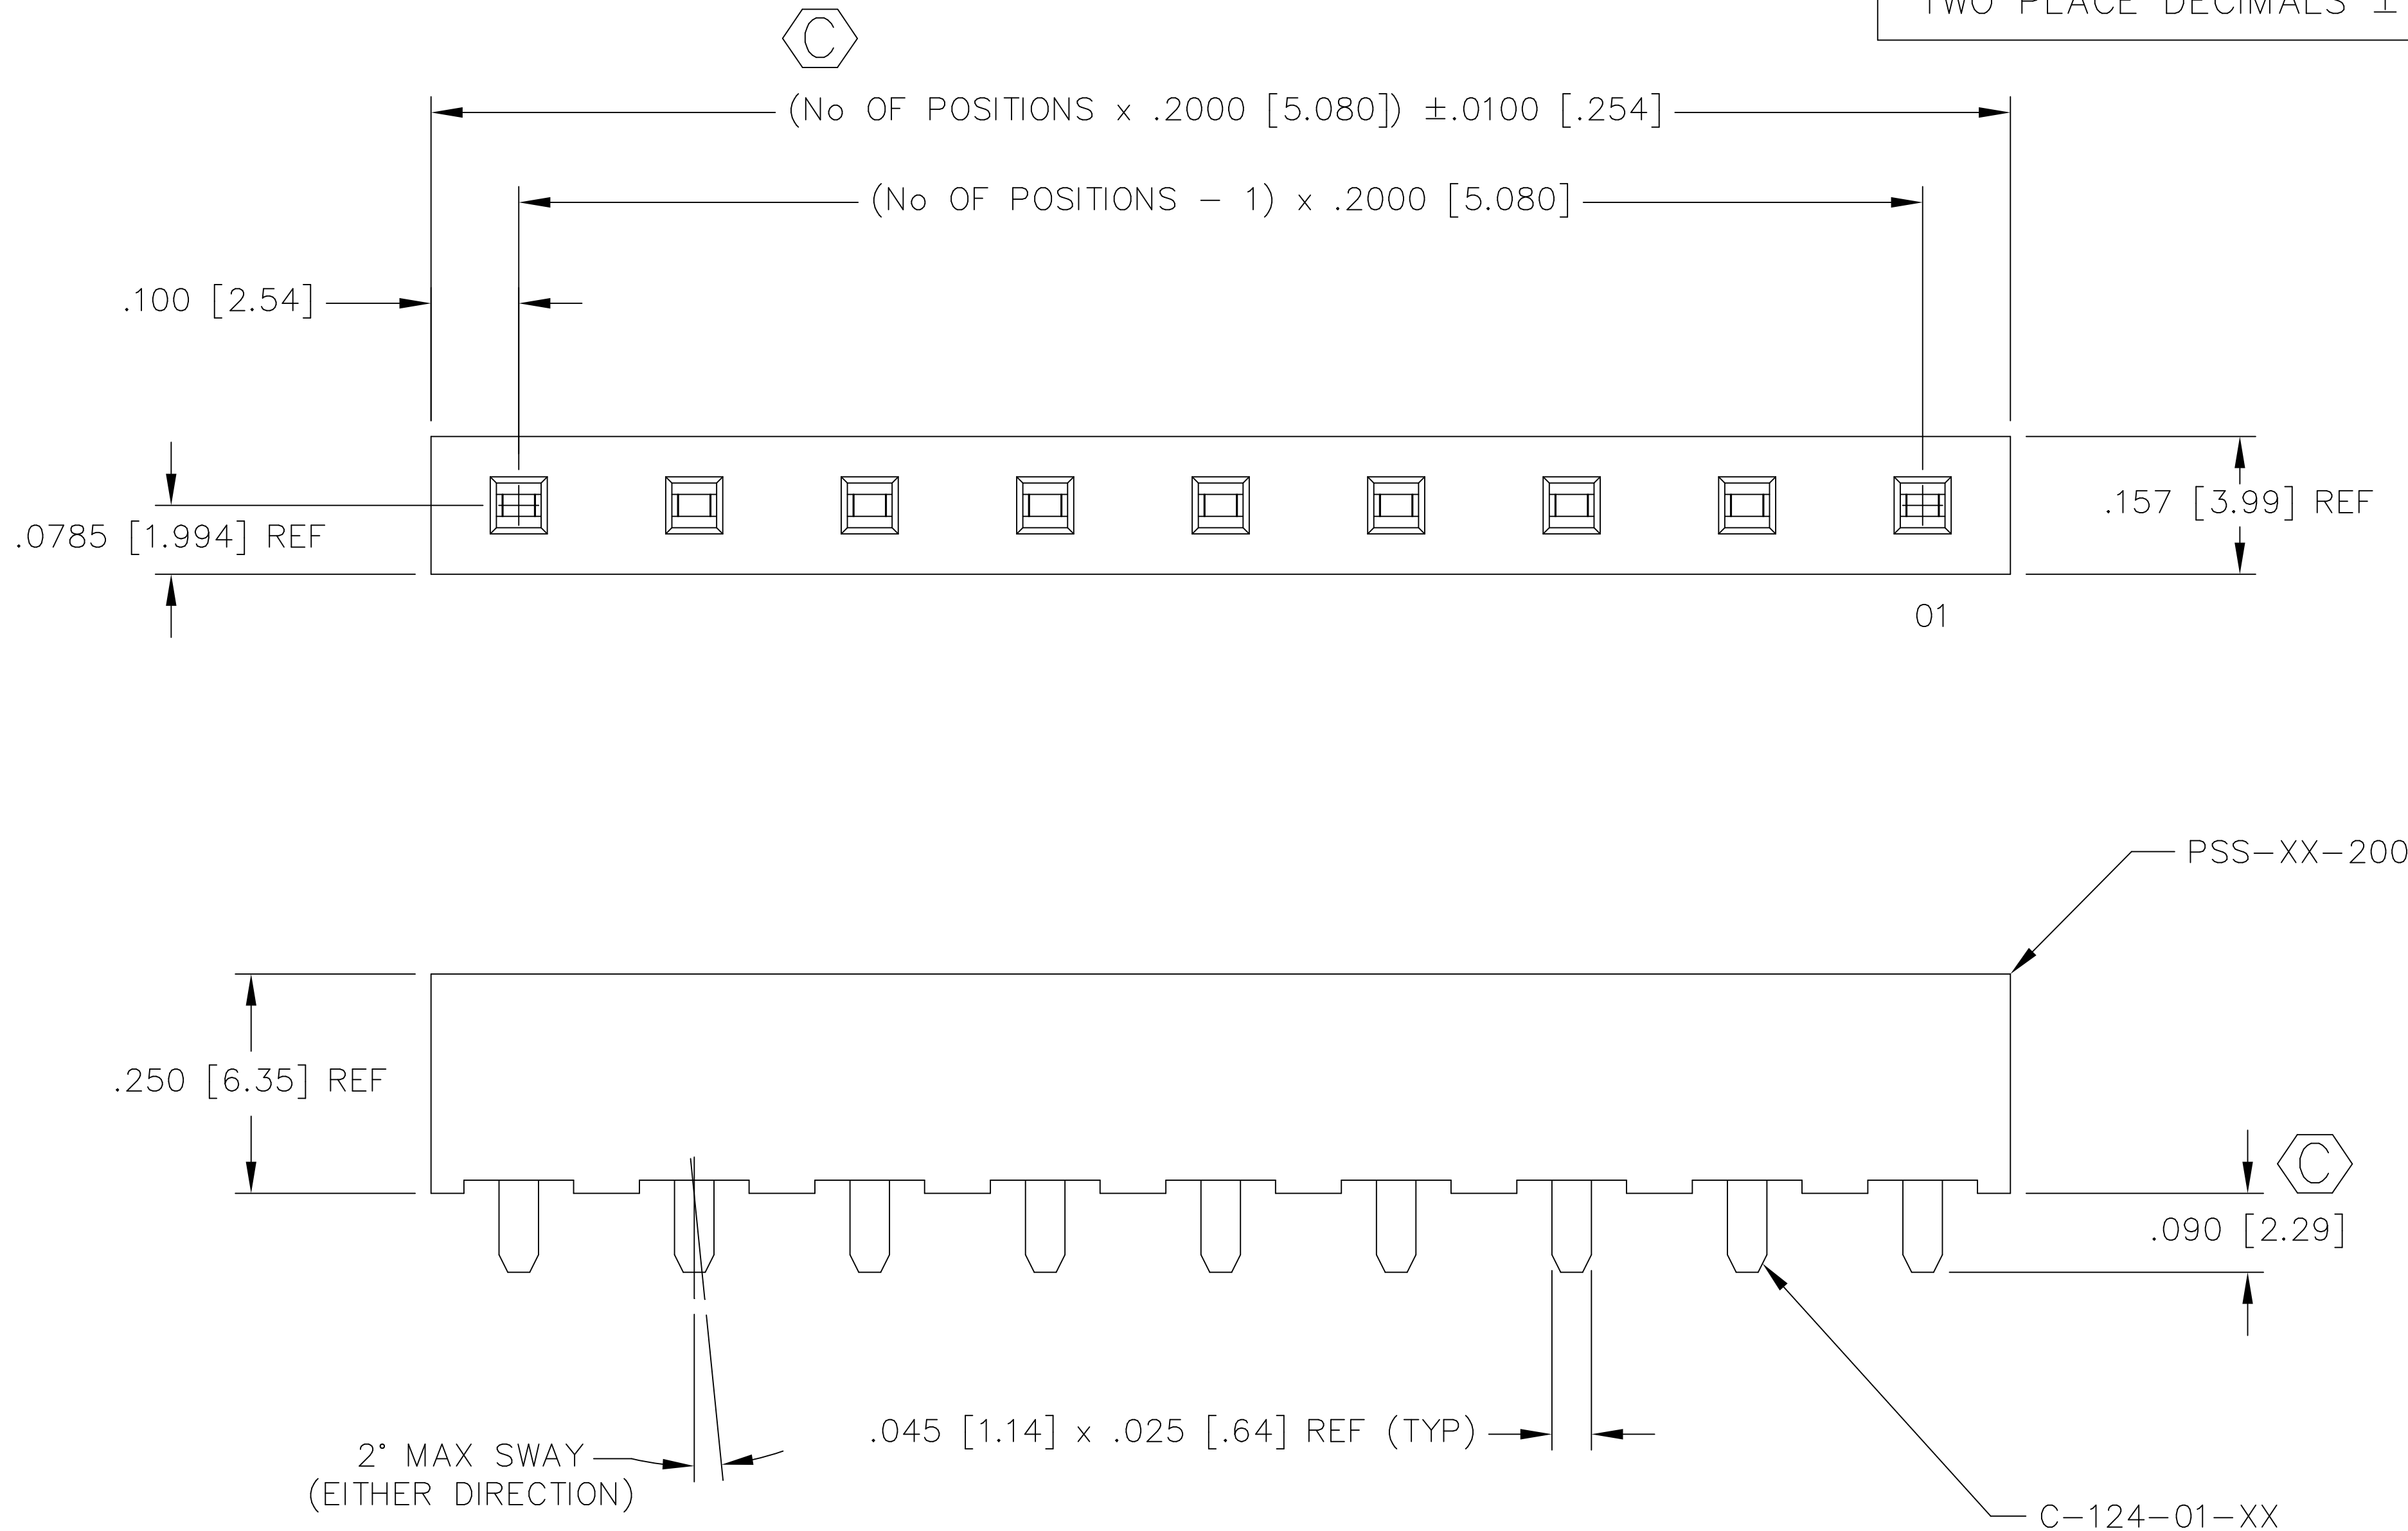


FIG. 1
-01 LEAD STYLE

PSS-XX-XX-X-X-XX


No OF POSITIONS
-02 THRU -20

LEAD STYLE
-01: .090 TAIL (SEE FIG. 1)
(USE C-124-XX-XX)
-02: SURFACE MOUNT (SEE FIG. 2)
(USE C-124-XX-XX)

OPTION
-K: POLYIMIDE
FILM PAD (SEE
SHEET TWO)
-TR: TAPE & REEL
(AVAILABLE ON -02
LEAD STYLE, -02 THRU -14
POSITIONS ONLY)

ROW SPECIFICATION
-S: SINGLE ROW
(USE PSS-20-200)

PLATING SPECIFICATION
-T: TIN (USE C-124-XX-T)
-TM: MATTE TIN (USE C-124-XX-T)
-H: HEAVY GOLD (USE C-124-XX-H)

- NOTES:
1. MAX ALLOWABLE BOW: .005 IN/IN AFTER ASSEMBLY
 2. PUSHOUT FORCE SHALL BE: 2 lb MINIMUM.
 3.  REPRESENTS A CRITICAL DIMENSION.
 4. INSERTION FORCE: 1.75 LB AVG
 5. WITHDRAWAL FORCE: 1.25 LB AVG
 6. ENDWALL THICKNESS: .021




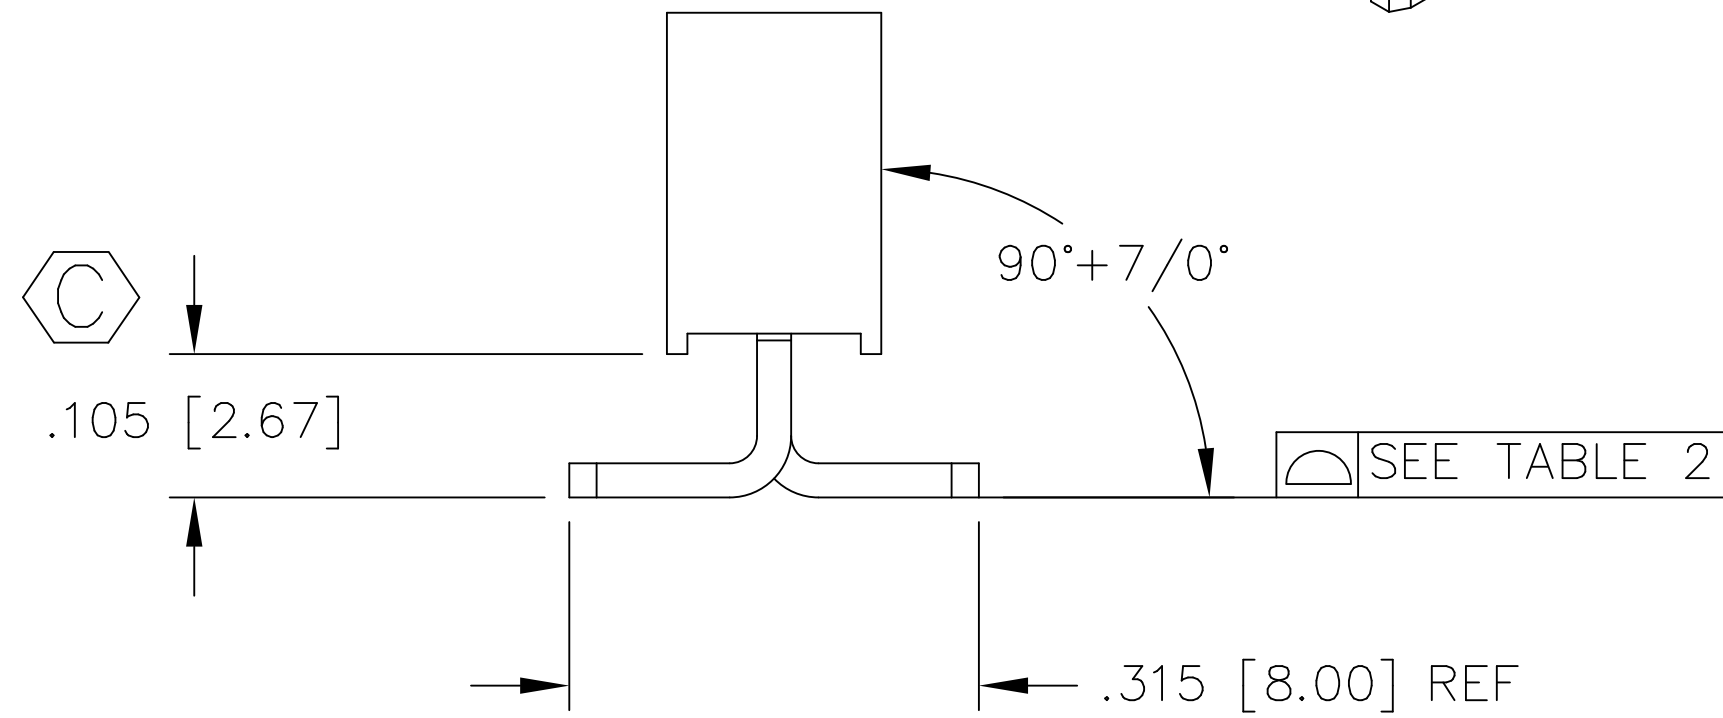


TABLE 2	
No OF POS	COPLANARITY
02-14	.006
15-20	.008

INPROCESS FOR -02

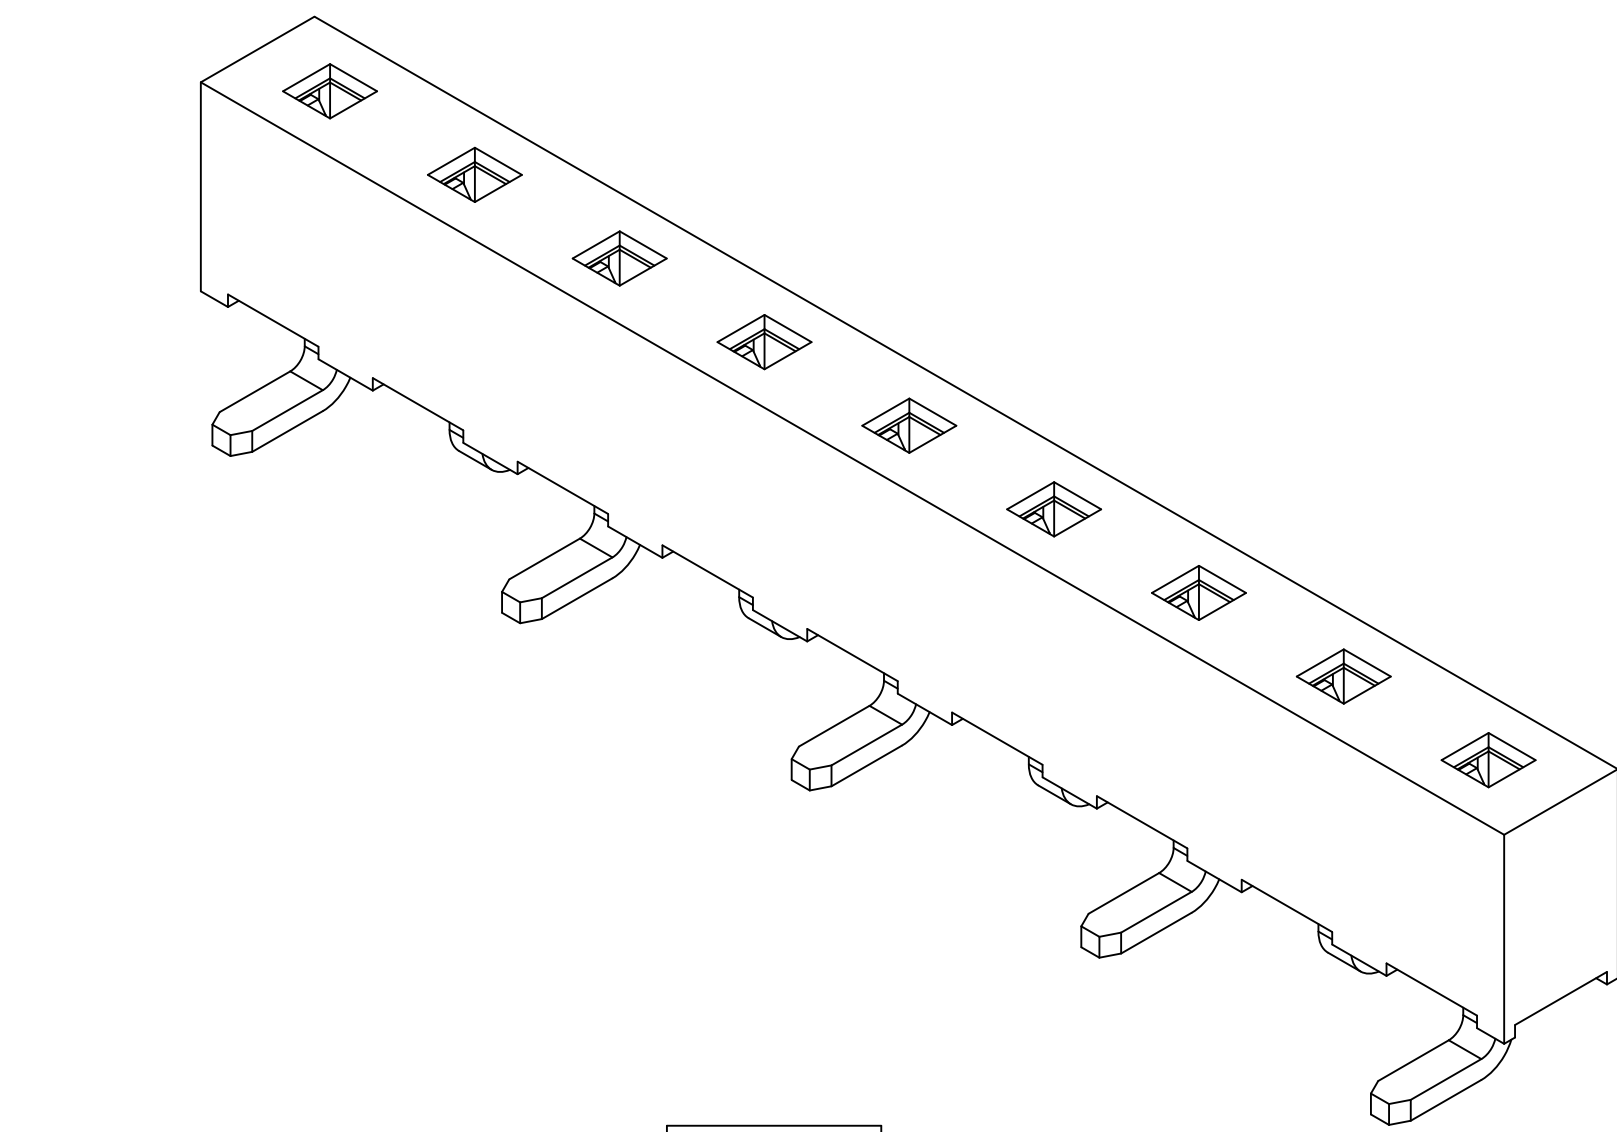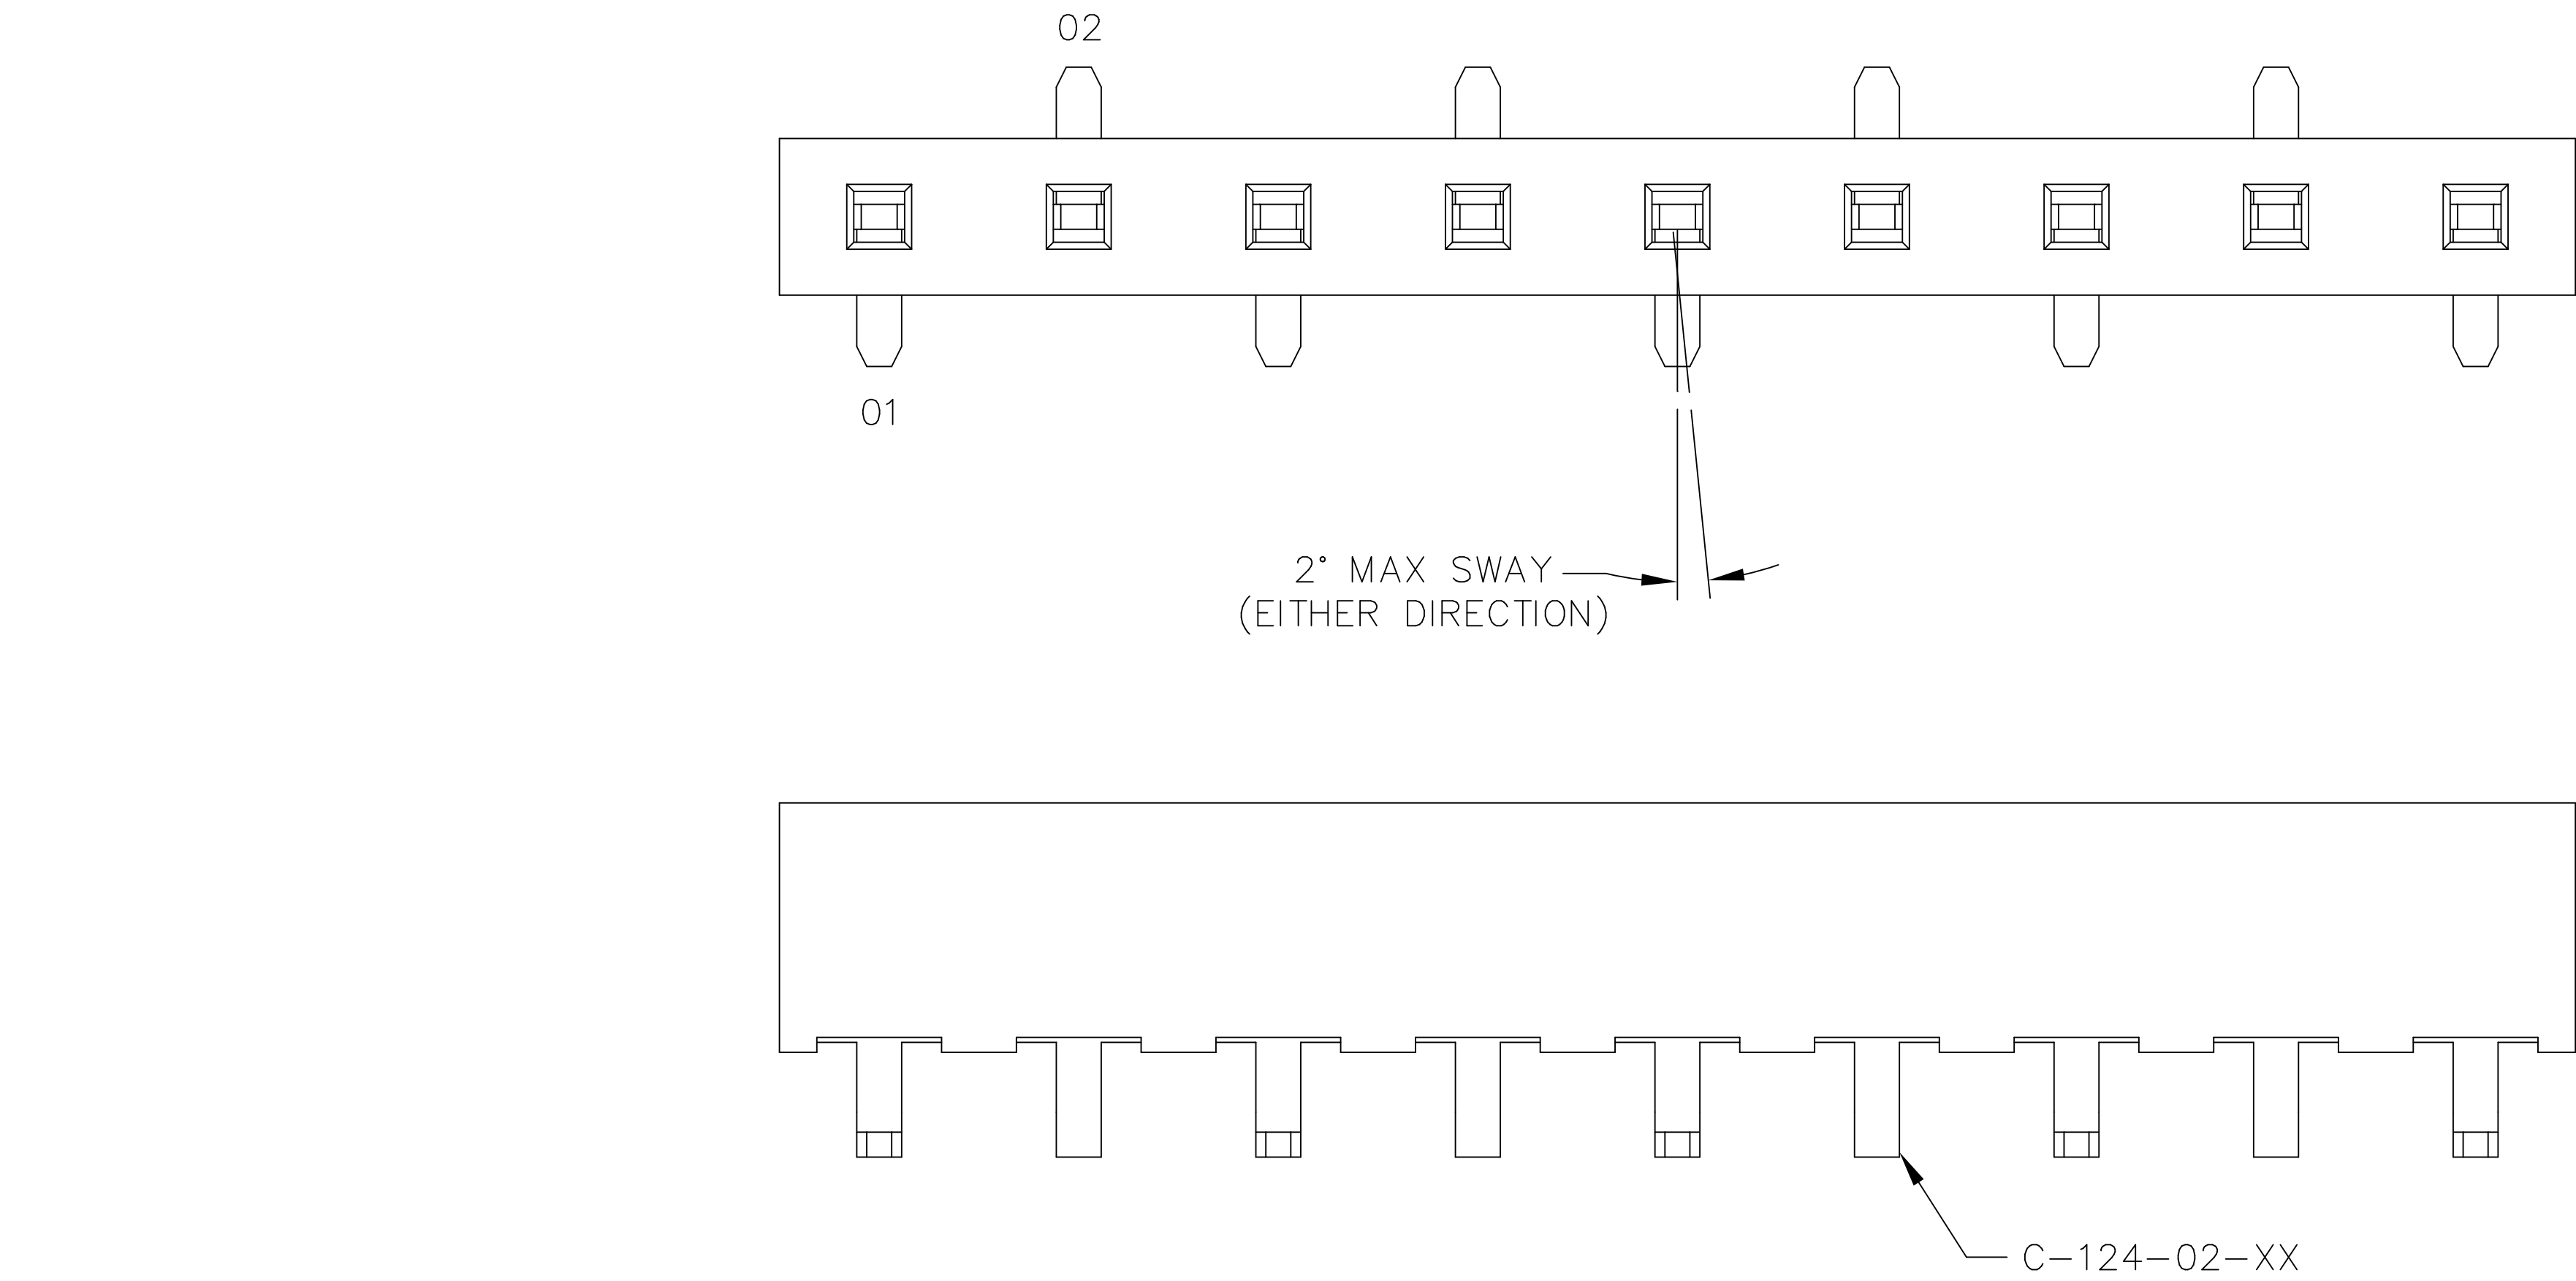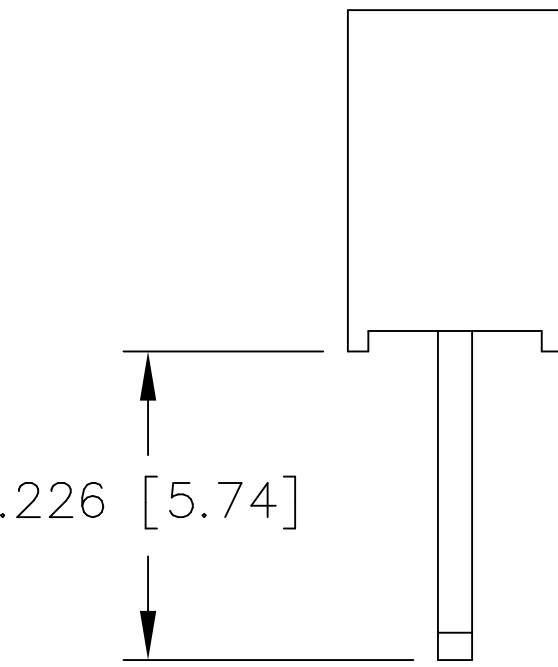

PACKAGING VIEWS


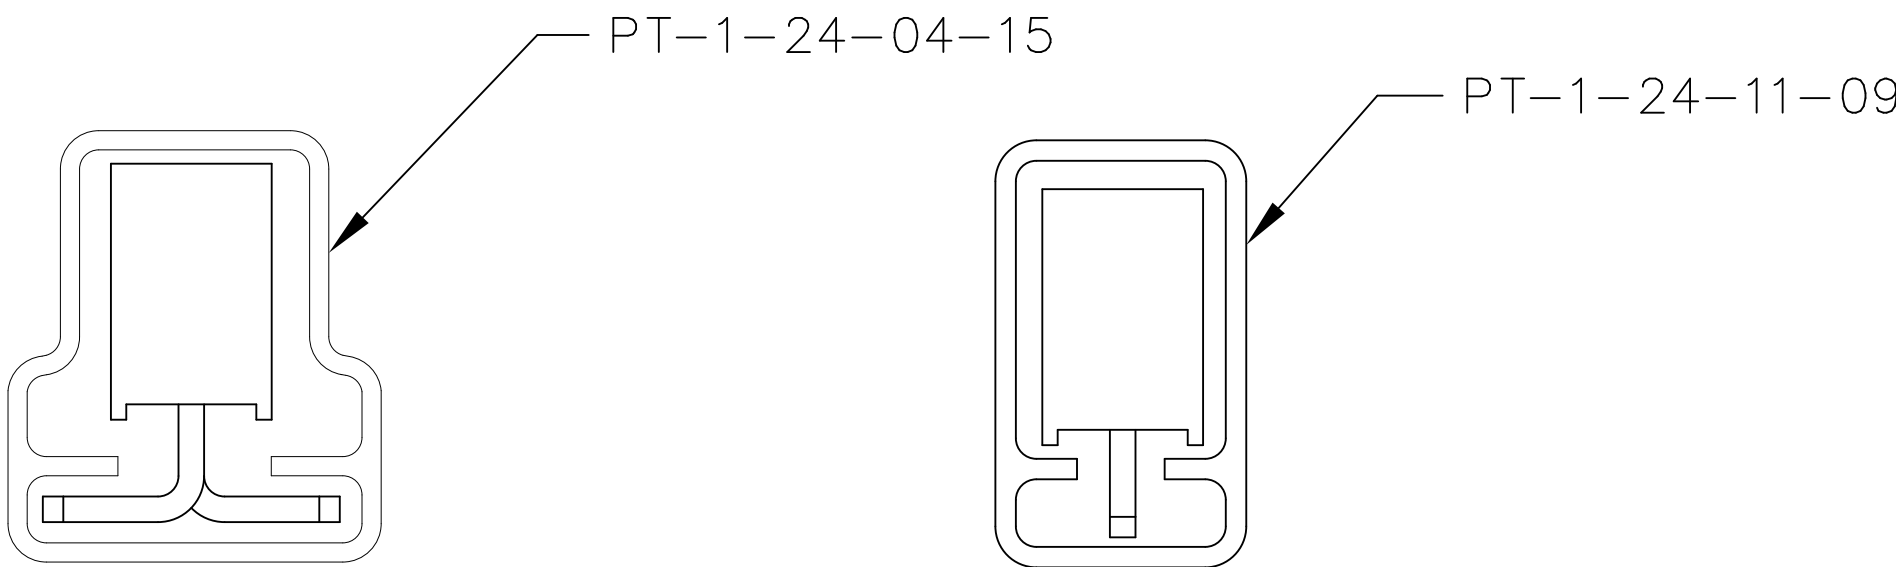


TABLE 1		
LEAD STYLE	PACKAGING TUBE	PLUG
-01	PT-1-24-11-09	TP-24
-02	PT-1-24-04-15	TP-03

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
INSULATOR: VECTRA E130i
COLOR: BLACK
CONTACT: BeCu 174 HT

MAX FLASH ALLOWED: .020 [.51]

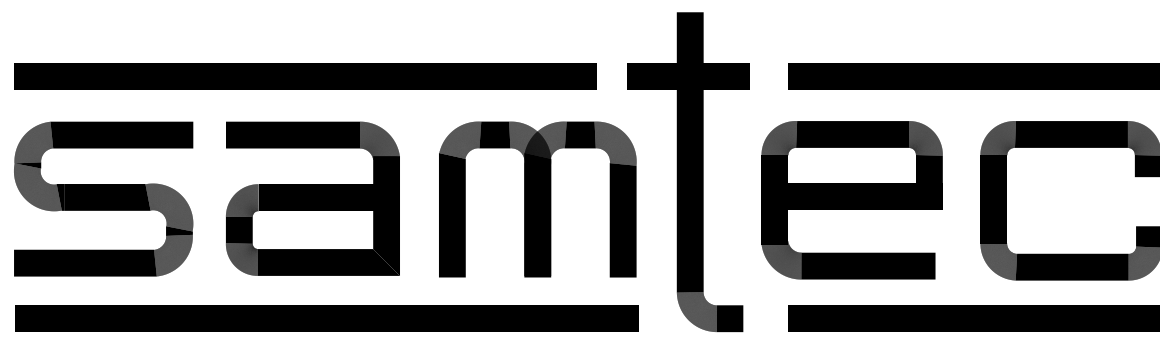

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
PURVIS 08-13-98

PSS-XX-XX-X-X-XX
SHEET 1 OF 2

MISC\MKTG
PSS-MKT1