


## Features

- \* Designed for ease in circuit board assembly.
- \* Black case enhance contrast ratio.
- \* Solid state light source.
- \* Reliable and rugged.

## Package Dimensions

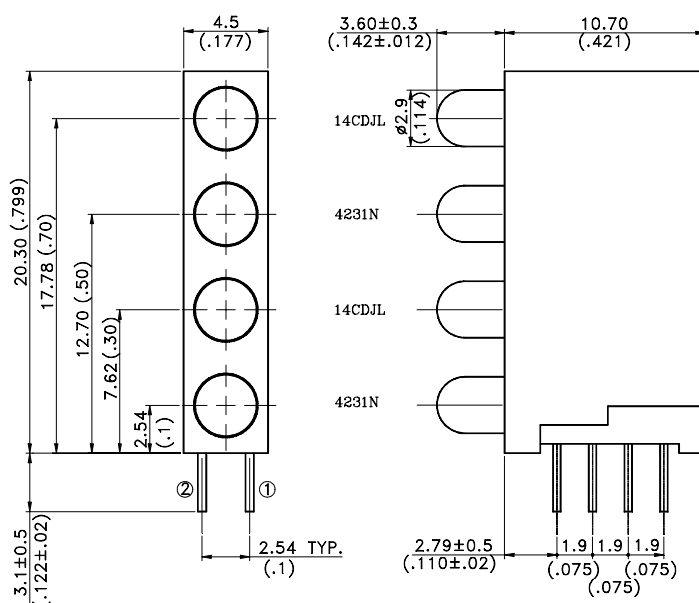

|        | ①             | ②              |
|--------|---------------|----------------|
| 14CDJL | Green Cathode | Yellow Cathode |
| 4231N  | Green Cathode | Green Anode    |

| Lamp Part No. | Lens           | Source Color |
|---------------|----------------|--------------|
| LTL-14CDJL    | White Diffused | Green/Yellow |
| LTL-4231N     | Green Diffused | Green        |

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}(.010")$  unless otherwise noted.
3. The holder color is black.
4. Specifications are subject to change without notice.



**L I T E - O N   E L E C T R O N I C S , I N C .**

**Property of Lite-On Only**

**Absolute Maximum Ratings at Ta=25°C**

| Parameter                                                    | Green               | Yellow | Unit  |
|--------------------------------------------------------------|---------------------|--------|-------|
| Power Dissipation                                            | 100                 | 60     | mW    |
| Peak Forward Current<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | 120                 | 80     | mA    |
| Continuous Forward Current                                   | 30                  | 20     | mA    |
| Derating Linear From 50°C                                    | 0.4                 | 0.25   | mA/°C |
| Reverse Voltage                                              | 5                   | 5      | V     |
| Operating Temperature Range                                  | -55°C to + 100°C    |        |       |
| Storage Temperature Range                                    | -55°C to + 100°C    |        |       |
| Lead Soldering Temperature<br>[1.6mm(.063") From Body]       | 260°C for 5 Seconds |        |       |

## Electrical Optical Characteristics at Ta=25°C

| Parameter                | Symbol             | LTL-14CDJL<br>LTL-4231N |    | Min. |     | Typ. |     | Max. | Unit | Test Condition                 |
|--------------------------|--------------------|-------------------------|----|------|-----|------|-----|------|------|--------------------------------|
| Luminous Intensity       | I <sub>v</sub>     | GR                      | YE | 3.7  | 2.5 | 12.6 | 8.7 |      | mcd  | I <sub>F</sub> = 20mA Note 1,4 |
|                          |                    | GREEN                   |    | 3.7  |     | 12.6 |     |      |      | I <sub>F</sub> = 10mA Note 1,4 |
| Viewing Angle            | 2 θ <sub>1/2</sub> | GR                      | YE |      |     | 80   |     |      | deg  | Note 2 (Fig.6)                 |
|                          |                    | GREEN                   |    |      |     | 60   |     |      |      |                                |
| Peak Emission Wavelength | λ <sub>p</sub>     | GR                      | YE |      |     | 565  | 585 |      | nm   | Measurement<br>@Peak (Fig.1)   |
|                          |                    | GREEN                   |    |      |     | 565  |     |      |      |                                |
| Dominant Wavelength      | λ <sub>d</sub>     | GR                      | YE |      |     | 569  | 588 |      | nm   | Note 3                         |
|                          |                    | GREEN                   |    |      |     | 569  |     |      |      |                                |
| Spectral Line Half-Width | Δ λ                | GR                      | YE |      |     | 30   | 35  |      | nm   |                                |
|                          |                    | GREEN                   |    |      |     | 30   |     |      |      |                                |
| Forward Voltage          | V <sub>F</sub>     | GR                      | YE |      |     | 2.1  |     | 2.6  | V    | I <sub>F</sub> = 20mA          |
|                          |                    | GREEN                   |    |      |     | 2.1  |     |      |      |                                |
| Reverse Current          | I <sub>R</sub>     | GR                      | YE |      |     |      |     | 100  | μ A  | V <sub>R</sub> = 5V            |
|                          |                    | GREEN                   |    |      |     |      |     |      |      |                                |
| Capacitance              | C                  | GR                      | YE |      |     | 35   | 15  |      | pF   | V <sub>F</sub> = 0 , f = 1MHz  |
|                          |                    | GREEN                   |    |      |     | 35   |     |      |      |                                |

Note: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2. θ<sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

3. The dominant wavelength, λ<sub>d</sub> is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

4. I<sub>v</sub> needs ±15% additional for guaranteed limits.

5. The stated maximum ratings refer to one chip.

## Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

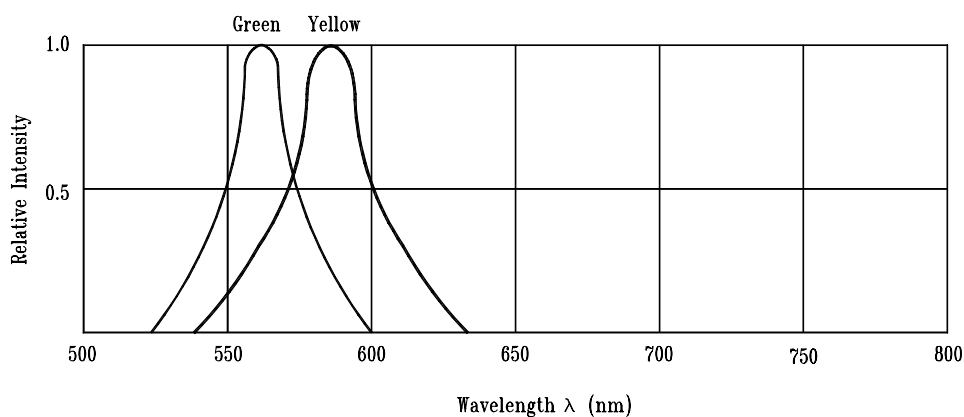


Fig.1 Relative Intensity vs. Wavelength




Fig.2 Forward Current vs. Forward Voltage




Fig.3 Forward Current Derating Curve

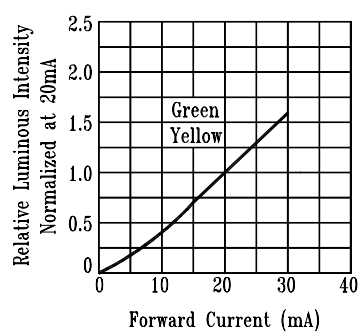


Fig.4 Relative Luminous Intensity vs. Forward Current

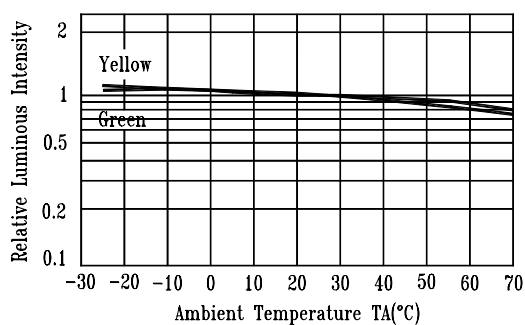


Fig.5 Luminous Intensity vs. Ambient Temperature




Fig.6 Spatial Distribution