

Polycarbonate Watertight 03 Product Drawings Last Updated 12/5/2006

Rose+Bopla Enclosures
7330 Executive Way
Frederick, MD 21704
301-696-9800
www.rose-bopla.com
customerservice@rose-bopla.com

Dimensional Drawings

Rose+Bopla's **Polycarbonate Watertight 03** enclosure offers exceptional design possibilities in high quality plastic at low prices. A broad range of sizes covers a wide array of widths and depths.

Polycarbonate Watertight 03

Ideal where high impact resistance or chemical corrosion must be addressed at a reasonable cost. Wall mounting holes are molded into each corner. These holes are outside the internal chamber to maintain the enclosures watertight integrity. The lid must be removed to utilize the wall mounting feature. This is a basic shoe box design made of injection-molded polycarbonate.

Rose+Bopla's Polycarbonate Watertight 03 enclosures are designed for use in the electro-mechanical and the electronics industry. They are good for small instruments and junction boxes. Typical applications are relay module enclosures, geophysical sensing equipment and temperature control monitors.

The Polycarbonate 03 box comes with a solid color lid and base, captive stainless steel lid screws, molded-in lid screw inserts in the base and a neoprene gasket. Metric press-in brass inserts for internal mounting bosses are also available.



Polycarbonate Watertight 03 Enclosures					
Part Number	Length (Inches/mm)	Width (Inches/mm)	Height (Inches/mm)	Weight	Drawing Page #
03050504 00	2.05 / 52	1.97 / 50	1.38 / 35	.08 lbs	17-53
03050704 30*	2.56 / 65	1.97 / 50	1.38 / 35	.11 lbs	17-53
03080806 30*	3.23 / 82	3.15 / 80	2.17 / 55	.30 lbs	17-54
03080809 30*	3.23 / 82	3.15 / 80	3.35 / 85	.38 lbs	17-54
03081206 30*	4.72 / 120	3.15 / 80	2.17 / 55	.48 lbs	17-55
03081209 30*	4.72 / 120	3.15 / 80	3.35 / 85	.49 lbs	17-55
03081606 30*	6.30 / 160	3.15 / 80	2.17 / 55	.51 lbs	17-56
03081609 00	6.30 / 160	3.15 / 80	3.35 / 85	.61 lbs	17-56
03082309 00	9.06 / 230	3.15 / 80	3.35 / 85	.74 lbs.	17-63
03121206 30*	4.80 / 122	4.72 / 120	2.17 / 55	.52 lbs	17-57
03121209 30*	4.80 / 122	4.72 / 120	3.35 / 85	.65 lbs	17-57
03121211 00	4.80 / 122	4.72 / 120	4.13 / 105	.77 lbs	17-58
03121609 00	6.30 / 160	4.72 / 120	3.54 / 90	.87 lbs	17-58
03121614 00	6.30 / 160	4.72 / 120	5.51 / 140	1.32 lbs	17-59
03122008 30*	7.87 / 200	4.72 / 120	2.95 / 75	.87 lbs	17-59
03122009 30*	7.87 / 200	4.72 / 120	3.54 / 90	1.03 lbs	17-60
03122410 00	7.87 / 200	5.90 / 150	2.95 / 75	1.04 lbs	17-60
03152008 00	7.87 / 200	5.90 / 150	2.95 / 75	1.15 lbs	17-61
03162409 00	9.45 / 240	6.30 / 160	3.54 / 90	1.43 lbs	17-61
03162412 00	9.45 / 240	6.30 / 160	4.72 / 120	1.75 lbs	17-62
03203615 00	14.17 / 360	7.87 / 200	5.87 / 149	3.41 lbs	17-64
03233009 00	11.81 / 300	9.06 / 230	3.35 / 85	2.01 lbs	17-64
03233011 00	11.81 / 300	9.06 / 230	4.33 / 110	2.54 lbs	17-65

Note: Dimensions are external. Metric is the primary dimension. Inch conversions and weights are for the user's convenience and are for reference only.
 * "30" suffix indicates US made. Accessories shown on drawing page.

TECHNICAL DATA:

- Color: Light Gray similar to RAL 7035, with a high-gloss finish.
- Material: Injection-molded Polycarbonate. See polycarbonate specification sheets in Technical Information Chapter.
- Protection Classifications:
Nema 4X,
IP66, EN60529
- Gasket Temperature Range:
Neoprene Gasket -40° F to +212° F
Silicone Gasket -76° F to +266° F
RFI Gasket -40° F to +392° F
- Surface Resistance: >10¹⁵ Ohm / VDE 0303.
- Disruptive Strength: >30 KV / mm / VDE 0303.
- Toxicity: Halogen Free.
- Approvals: UL Listed File #E206630, UL 50, UL 508
CSA Approved
Flammability: UL 94 V2
Special Material:
UL Listed File #E206630, UL 50, UL 508
CSA Approved
Flammability: UL 94 V5A
- Options: (Minimum order may apply)
Special Colors
RFI Protection

Special Material: Special order. See above for approvals.


Polycarbonate/ABS Watertight

03080806 / 09080806 / 33080806 00

External Dimensions: L 82 x W 80 x H 55 mm

Page 1-16, 16, 22

Standard Features
• 10093133 00 M4x24 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (11.02" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10093163 00 Safety Lid screws. • 10093092 00 Allen head lid screws. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061201 00 Terminal rails (TS 15). • 10093310 00 Thumb screws. • 10089021 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (11.02" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

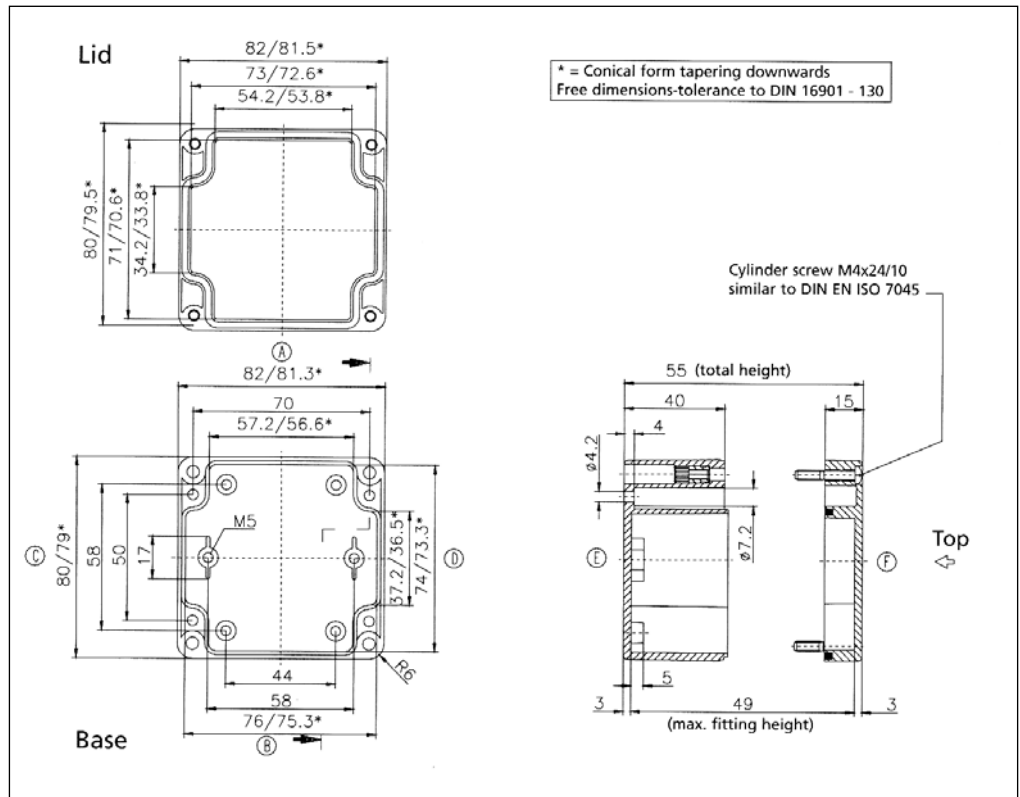


03080809 / 09080809 / 33080809 00

External Dimensions: L82 x W80 x H85 mm

Page 1-15, 16, 22

Standard Features
• 10093133 00 M4x24 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (11.02" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10093163 00 Safety Lid screws. • 10093092 00 Allen head lid screws. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061201 00 Terminal rails (TS 15). • 10093310 00 Thumb screws. • 10089021 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (11.02" length). • 10083214 00 M4.7x7.8mm Self tapping screw for mounting plate.

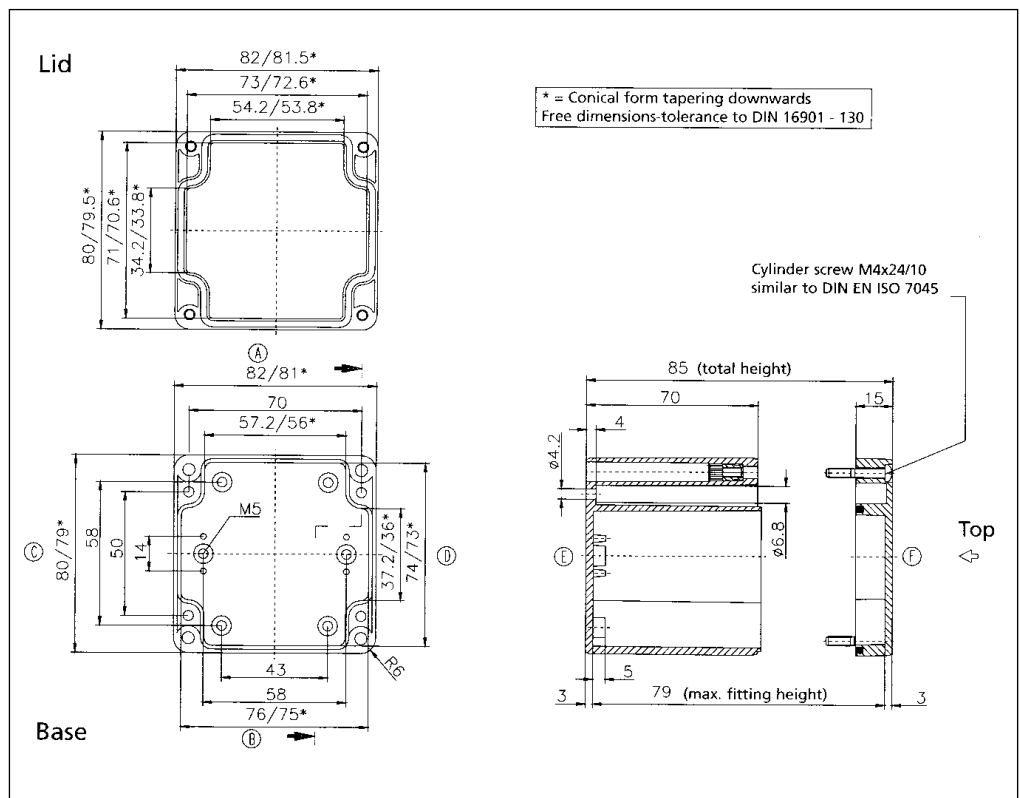



ROSE+BOPLA
ENCLOSURES

A PHOENIX MECANO COMPANY

03081206 / 09081206 / 33081206

External Dimensions: L 120 x W 80 x H 55 mm

Page 1-15, 16, 22


Standard Features

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- 10082002 00 2.7mm Neoprene Gasket (14.56" length).


Accessories

- 10086123 00 Brass Mounting Inserts.
- 10093163 00 Safety Lid screws.
- 10093092 00 Allen head lid screws.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061202 00 Terminal rails (TS 15).
- 10052131 00 External Hinge.
- 10093310 00 Thumb screws.
- 10089022 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082021 00 2.62mm RFI Gasket (14.56" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.


Lid

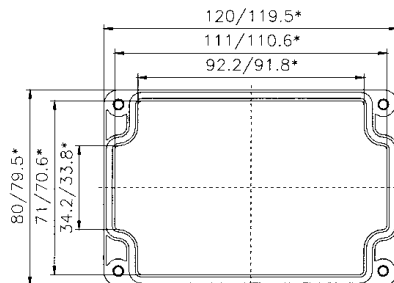

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

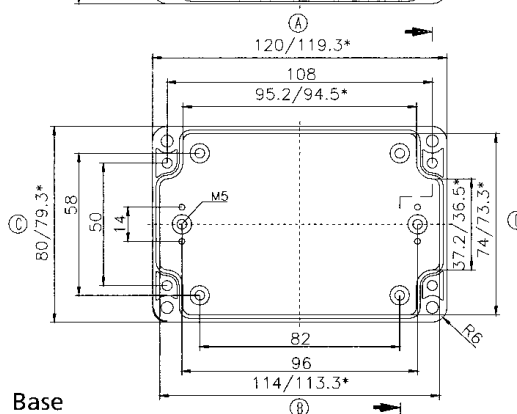

Base

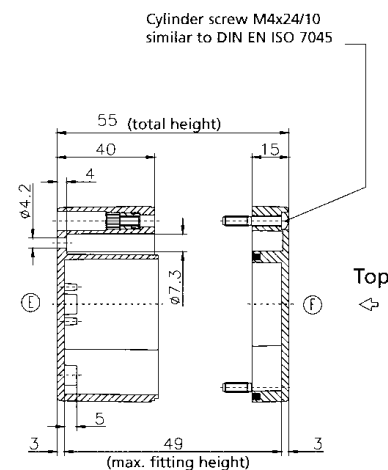

Cylinder screw M4x24/10
similar to DIN EN ISO 7045

Top

03081209 / 09081209 / 33081209

External Dimensions: L 120 x W 80 x H 85 mm

Page 1-15, 16, 22


Standard Features

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- 10082002 00 2.7mm Neoprene Gasket (14.56" length).


Accessories

- 10086123 00 Brass Mounting Inserts.
- 10093163 00 Safety Lid screws.
- 10093092 00 Allen head lid screws.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061202 00 Terminal rails (TS 15).
- 10052131 00 External Hinge.
- 10093310 00 Thumb screws.
- 10089022 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082021 00 2.62mm RFI Gasket (14.56" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.


Lid

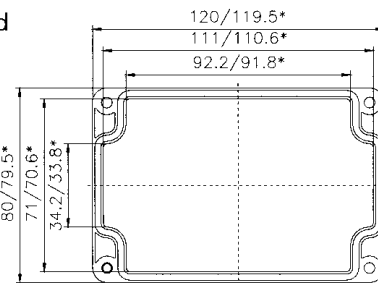

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

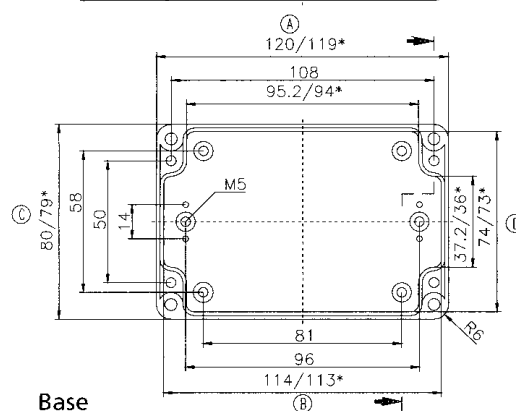

Base

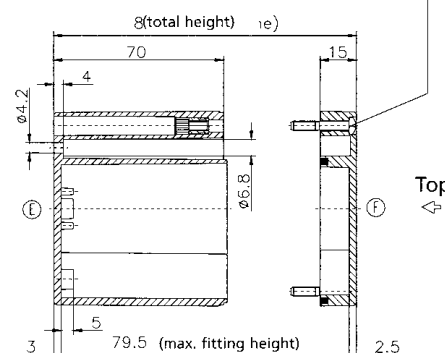

Cylinder screw M4x24/10
similar to DIN EN ISO 7045

Top

Dimensional Drawings


Polycarbonate/ABS Watertight

03081606 / 09081606 / 33081606 00

External Dimensions: L160 x W80 x H55 mm

Page 1-15, 16, 22

Standard Features
• 10093133 00 M4x24 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (17.71" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10093163 00 Safety Lid screws. • 10093092 00 Allen head lid screws. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061203 00 Terminal rails (TS 15). • 10052131 00 External Hinges. • 10093310 00 Thumb screws. • 10089023 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (17.71" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

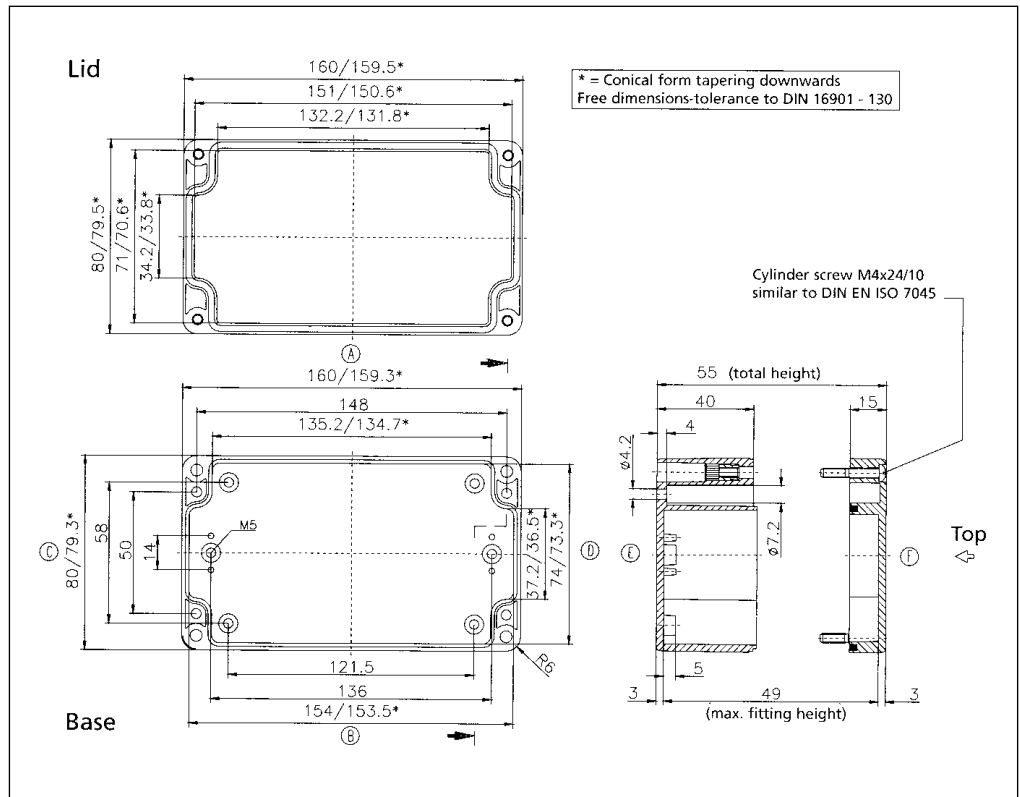


03081609 / 09081609 / 33081609 00

External Dimensions: L160 x W80 x H85 mm

Page 1-15, 16, 22

Standard Features
• 10093133 00 M4x24 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (17.72" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10093163 00 Safety Lid screws. • 10093092 00 Allen head lid screws. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061203 00 Terminal rails (TS 15). • 10052131 00 External Hinges. • 10093310 00 Thumb screws. • 10089023 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (17.72" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

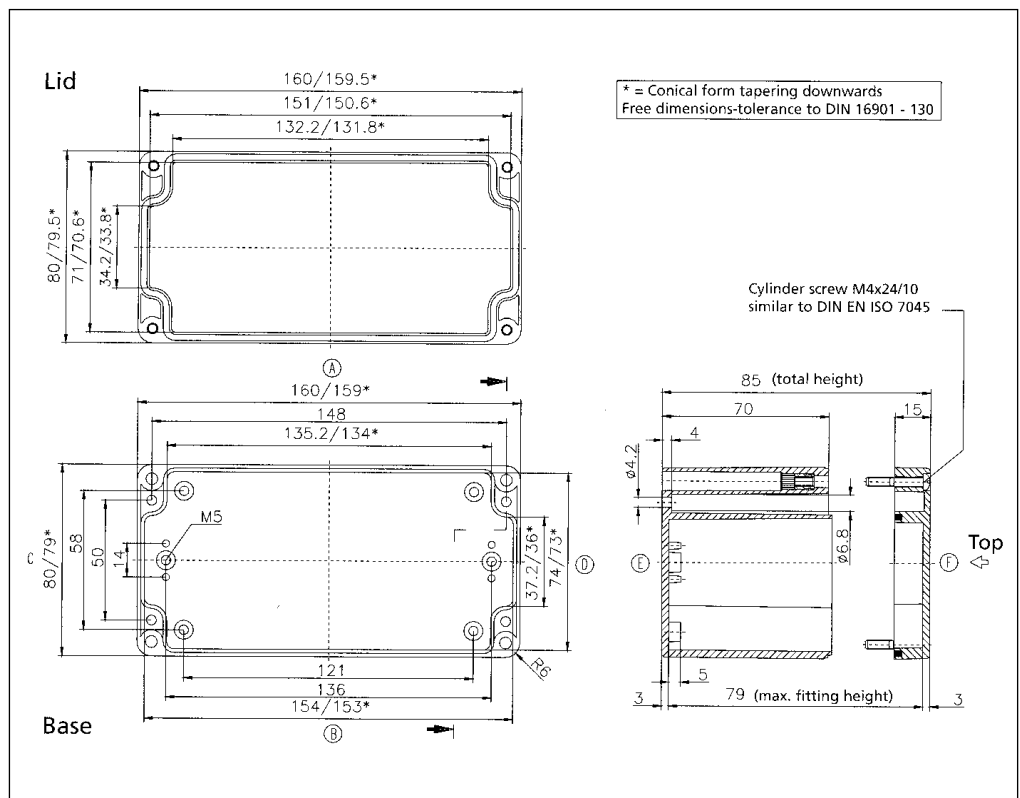

Page 1-15, 16, 22

Lid

122/121.5*
113/112.6*
94.2/93.8*

120/119.5*
111/110.6*
74.2/73.8*

Base

122/121.3*
110
97.2/96.5*

120/119.3*
98
90
14
M5
77.2/76.5*
114/113.3*

83.4
100
116/115.3*

Top

55 (total height)

40
4
15
4
48
3

$\phi 4.2$
 $\phi 7.2$

Base

Top

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

Cylinder screw M4x24/10
similar to DIN EN ISO 7045

Page 1-15, 16, 22

Lid

113/112.6*
94.2/93.8*

120/119.5*
111/110.6*
74.2/73.8*

122/121*
110
97.2/96.2*

114/113*
77.2/76.2*
83.4
100
116/115*

M5

R6

Base

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

Cylinder screw M4x24/10
similar to DIN EN ISO 7045

85 (total height)
70
15
4
4
4
78 (max. fitting height)
3

Top


Polycarbonate/ABS Watertight

03121211 / 09121211 / 33121211 00

External Dimensions: L 122 x W 120 x H 105 mm

Page 1-15, 16, 22

Standard Features
• 10093050 00 M4x45 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (17.72" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061304 00 Terminal rails (TS 32). • 10061324 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089002 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (17.72" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

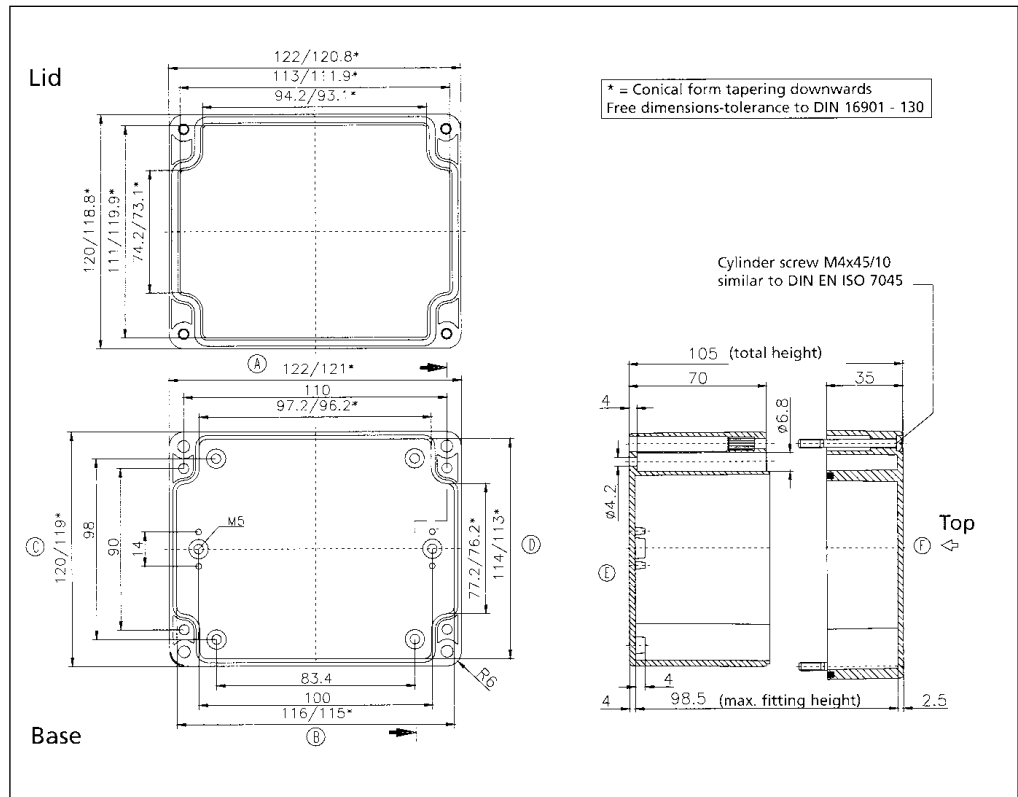


03121609 / 09121609 / 33121609 00

External Dimensions: L160 x W120 x H90 mm


Page 1-15, 16, 22

Standard Features
• 10093045 00M4x37 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (19.69" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061305 00 Terminal rails (TS 32). • 10061325 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089006 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (19.69" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

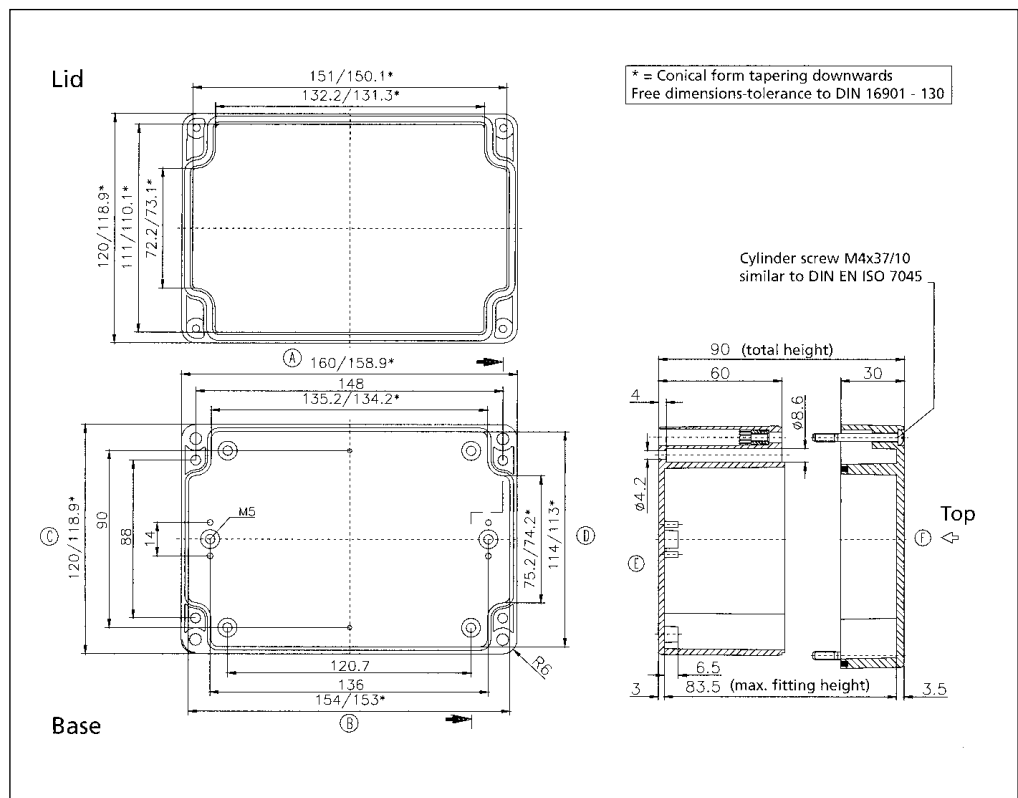


Page 1-15, 16, 22

Standard Features
• 10093072 00 M4x90 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (19.69" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061305 00 Terminal rails (TS 32). • 10061325 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089006 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.626mm RFI Gasket (19.69" length). • 10093214 00 M4.77.8mm Self tapping screw for mounting plate.

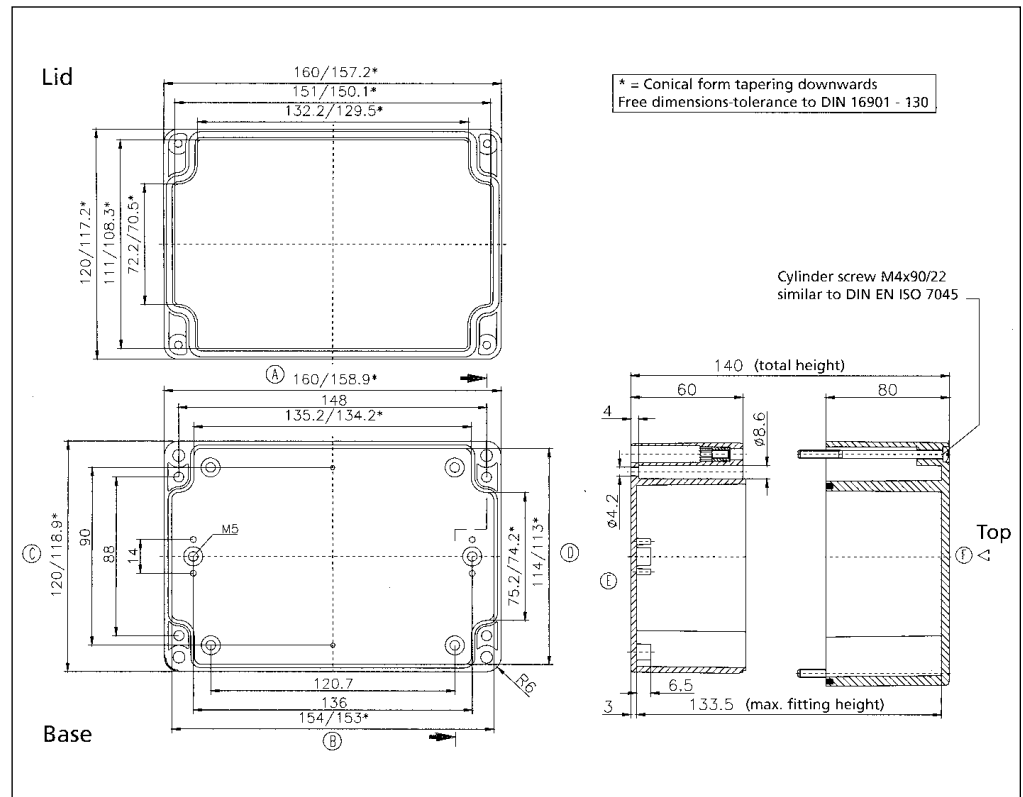

Page 1-15, 16, 22

Standard Features • 10093133 00 M4x24 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (23.23" length).
Accessories • 10086123 00 Brass Mounting Inserts. • 10093163 00 Safety Lid screws. • 10093092 00 Allen Head Lid screws. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061306 00 Terminal rails (TS 32). • 10061326 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10093310 00 Thumb screws. • 10089003 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (23.23" length). • 10093214 00 M4.77.8mm Self tapping screw for mounting plate.

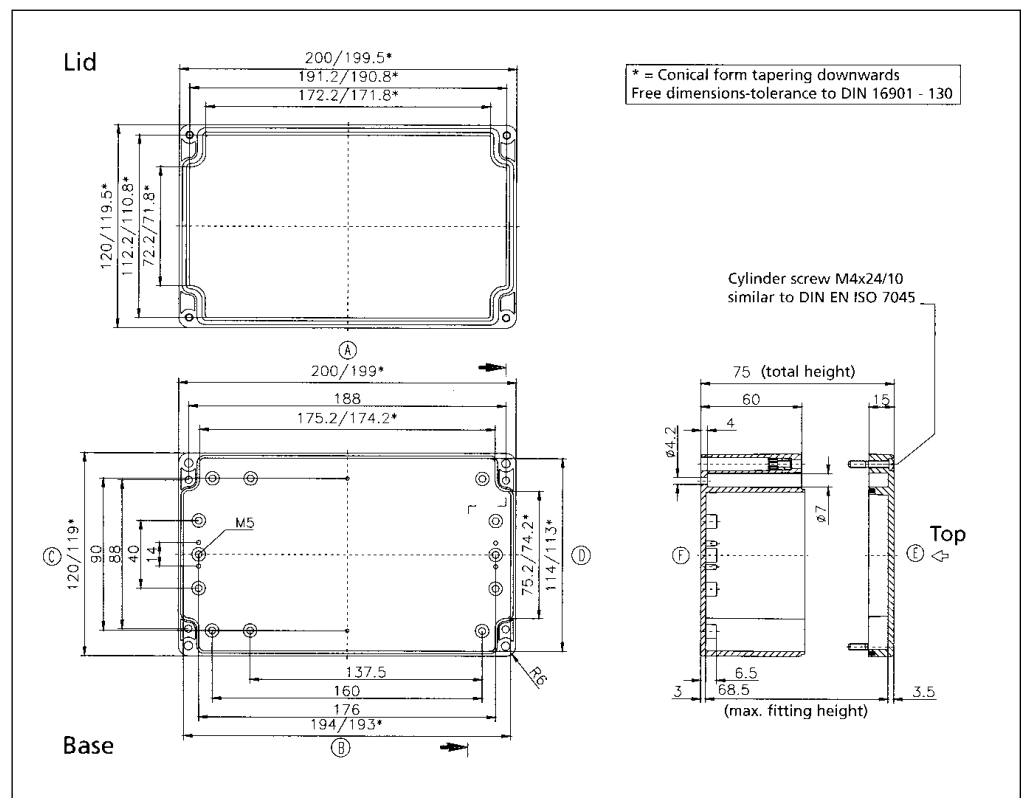

Polycarbonate/ABS Watertight

03122009 / 09122009 / 33122009 00

External Dimensions: L200 x W120 x H90 mm

Page 1-15, 16, 22


Standard Features

- 10093045 00 M4x37 Stainless steel captive combo head lid screws.
- 10082002 00 2.7mm Neoprene Gasket (23.23" length).


Accessories

- 10086123 00 Brass Mounting Inserts.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061306 00 Terminal rails (TS 32).
- 10061326 00 Terminal rails (TS 35).
- 10052131 00 External Hinges.
- 10089003 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082021 00 2.62mm RFI Gasket (23.23" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.


Lid

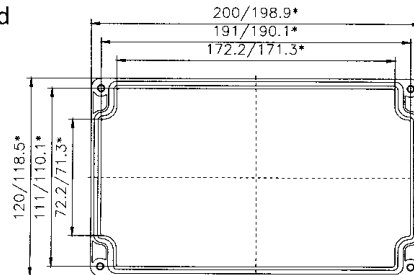

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

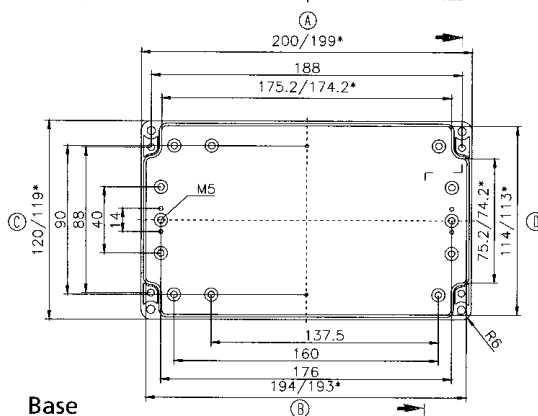

Base

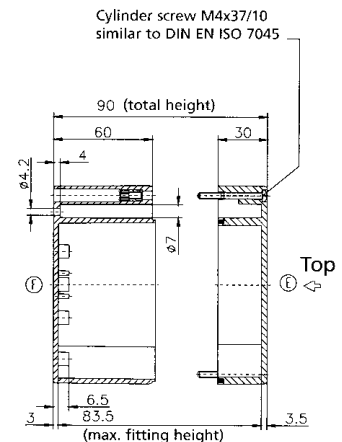

Cylinder screw M4x37/10
similar to DIN ISO 7045

Top

03122410 / 09122410 / 33122410 00

External Dimensions: L 240 x W 120 x H 100 mm


Page 1-15, 16, 22

Standard Features

- 10093047 00 M4x34 Stainless steel captive combo head lid screws.
- 10082002 00 2.7mm Neoprene Gasket (26.77" length).

Accessories

- 10086123 00 Brass Mounting Inserts.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061307 00 Terminal rails (TS 32).
- 10061327 00 Terminal rails (TS 35).
- 10052131 00 External Hinges.
- 10089005 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082021 00 2.62mm RFI Gasket (26.77" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

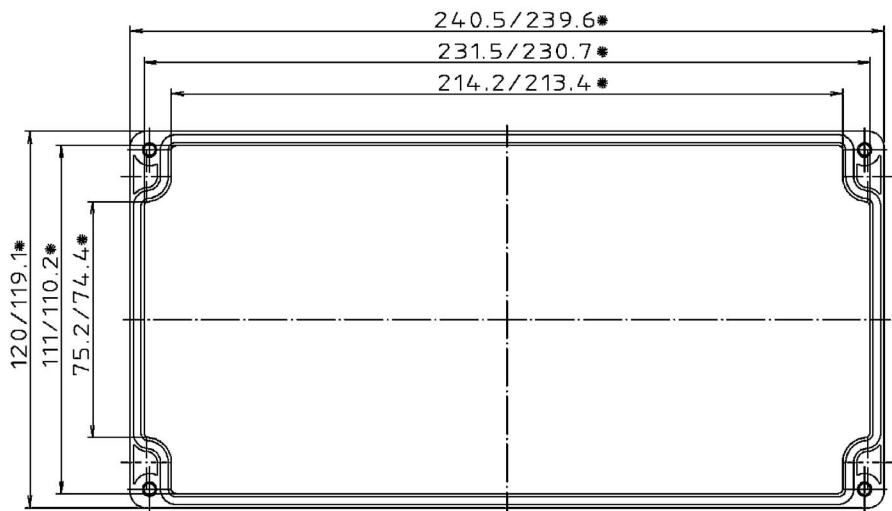

Lid



ROSE+BOPLA
ENCLOSURES

A PHOENIX MECANO COMPANY

03152008 / 09152008 / 33152008 00

External Dimensions: L200 x W150 x H75 mm

Page 1-15, 16, 22


Standard Features

- 10093046 00 M4x24 Stainless steel captive combo head lid screws.
- 10082003 00 3.3mm Neoprene Gasket (25.98" length).

Accessories


- 10086123 00 Brass Mounting Inserts.
- 10093163 00 Safety Lid screws.
- 10093092 00 Allen Head Lid screws.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061308 00 Terminal rails (TS 32).
- 10061328 00 Terminal rails (TS 35).
- 10052131 00 External Hinges.
- 10003310 00 Thumb screws.
- 10089004 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082022 00 3mm RFI Gasket (25.98" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

Lid

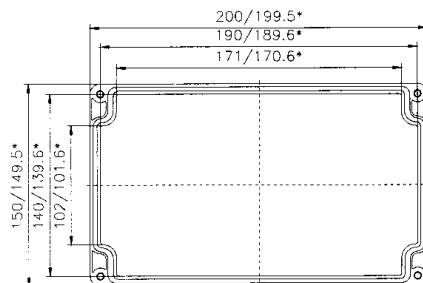


* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

Base

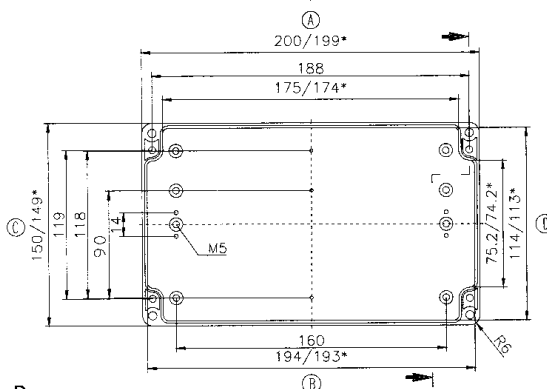

Cylinder screw M4x24/10
similar to DIN EN ISO 7045

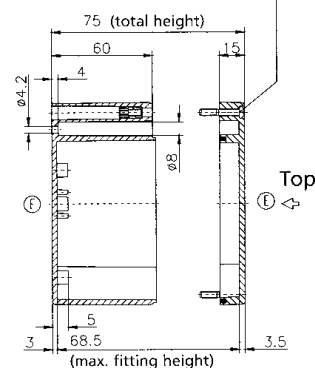

03162409 / 09162409 / 33162409 00

External Dimensions: L240 x W160 x H90 mm

Page 1-15, 16, 22


Standard Features

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- 10082002 00 2.7mm Neoprene Gasket (30.71" length).

Accessories


- 10086123 00 Brass Mounting Inserts.
- 10093163 00 Safety Lid screws.
- 10093092 00 Allen Head Lid screws.
- 10089007 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061307 00 Terminal rails (TS 32).
- 10061327 00 Terminal rails (TS 35).
- 10052131 00 External Hinges.
- 10093310 00 Thumb screws.
- 10089007 00 Mounting Plate.
- 10082013 00 3mm Silicone gasket.
- 10082021 00 2.5mm RFI Gasket (30.71" length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

Lid

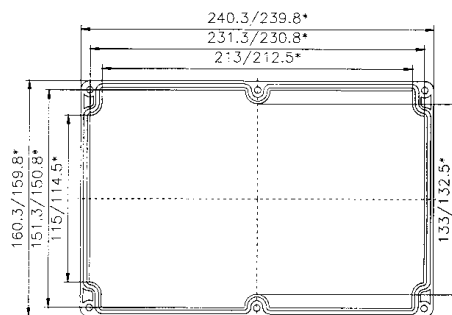


* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

Base

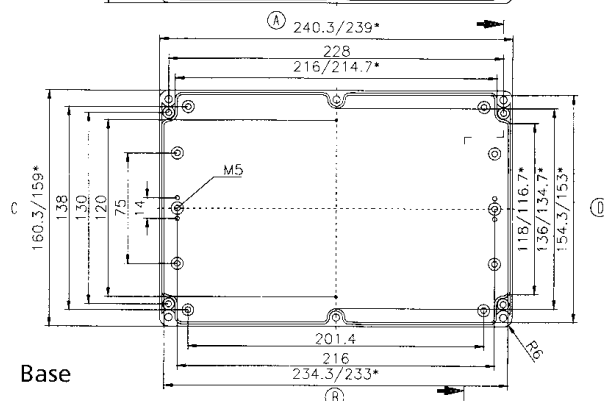


Cylinder screw M4x24/10
similar to DIN EN ISO 7045

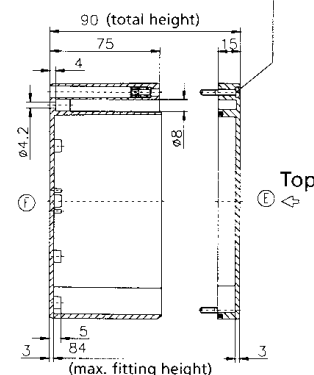

Dimensional Drawings

Polycarbonate/ABS Watertight

Standard Features
• 10093048 00 M4x55 Stainless steel captive combo head lid screws. • 10082002 00 2.7mm Neoprene Gasket (30.71" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061307 00 Terminal rails (TS 32). • 10061327 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089007 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082021 00 2.62mm RFI Gasket (30.71" length). • 10093214 00 M4.77.8mm Self tapping screw for mounting plate.

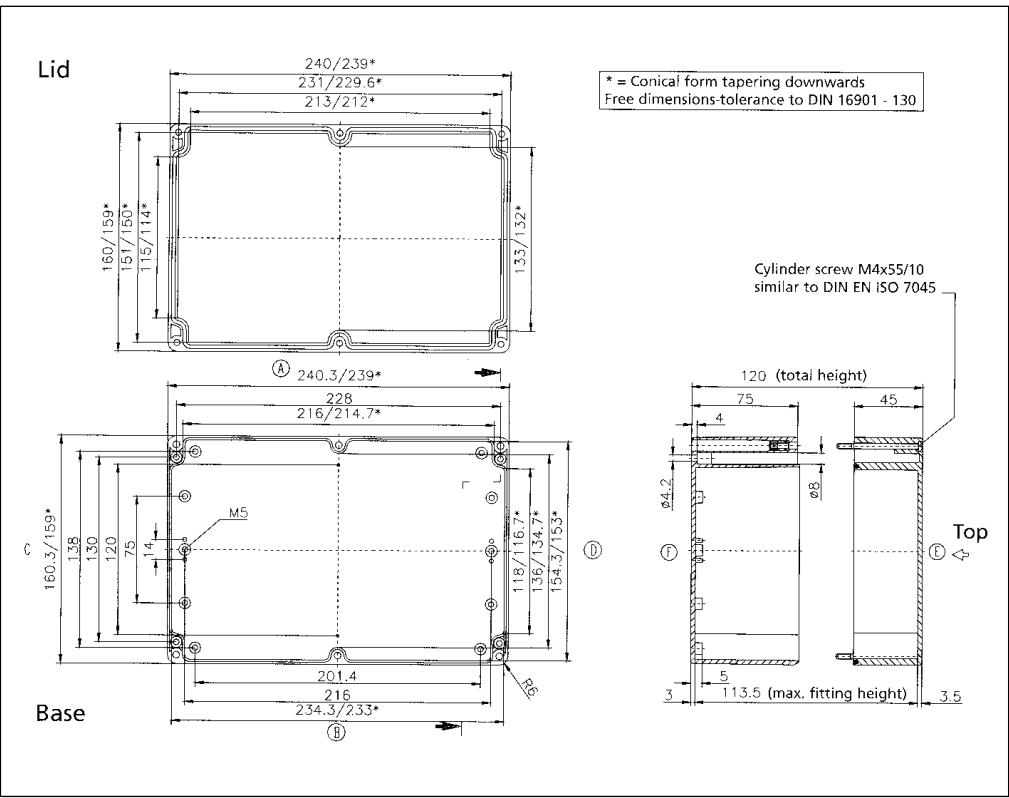



ROSE+BOPLA
ENCLOSURES

A PHOENIX MECANO COMPANY

03082309 00 / 09082309 00 / 33082309 00

External Dimensions: L 230 x W 80 x H 85 mm

Page 1-15, 16, 22


Standard Features

- 10093133 00 M4x24 Stainless steel captive combo head lid screws.
- 10082002 00 2.7 mm Neoprene gasket (23.2" length).


Accessories

- 10081623 00 Brass mounting Inserts.
- 10093163 00 Safety lid screws.
- 10093092 00 Allen head lid screws.
- 10094110 00 Rubber table feet.
- 10052031 00 External mounting brackets.
- 10052131 00 External hinges.
- 10093310 00 Thumb screws.
- 10082013 00 3.3mm silicone gasket.
- 10082021 00 2.62mm RFI gasket (23.2" Length).
- 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

Lid

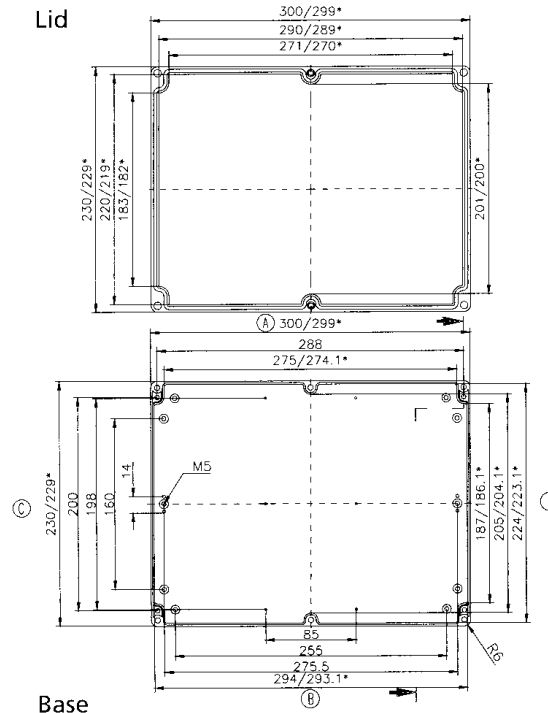

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

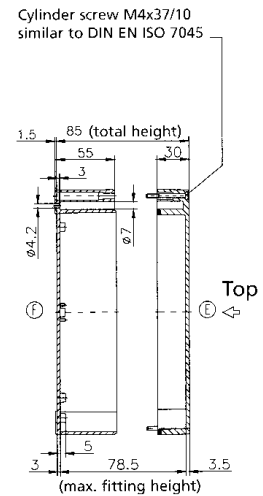

Base

09403615 00

External Dimensions: L 400 x W 360 x H 150 mm

Page 1-22


Standard Features

- 10093112 00 M6x45 Stainless steel captive combo head lid screws.
- 10082003 00 3.3 mm Neoprene gasket (59.84" length).


Accessories

- 10081624 00 Brass mounting inserts.
- 10094110 00 Rubber table feet.
- 10061312 00 Terminal rail (TS 32).
- 10061332 00 Terminal rail (TS 35).
- 10052131 00 External hinges.
- 10089134 00 Mounting plate.
- 10082013 00 3.3mm silicone gasket.
- 10082022 00 3mm RFI gasket (59.84" Length).
- 10093215 00 M6.3x9.5 Self tapping screw for mounting plate.

Lid

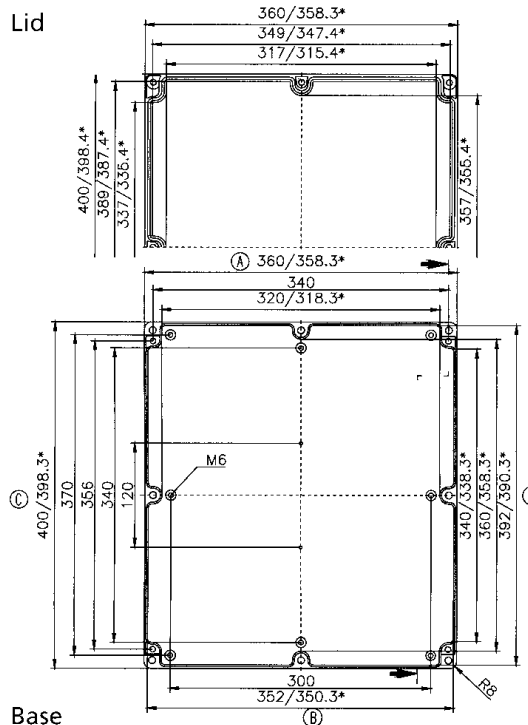

* = Conical form tapering downwards
Free dimensions-tolerance to DIN 16901 - 130

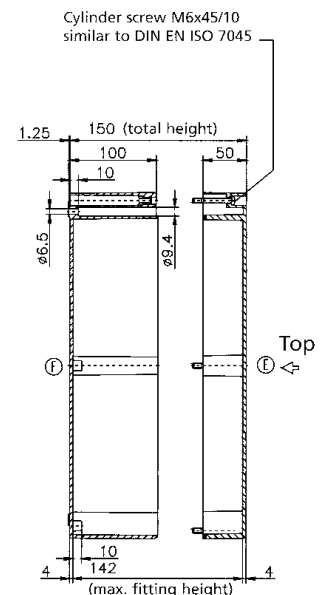

Base

Dimensional Drawings


Polycarbonate/ABS Watertight

03203615 / 09203615 / 33203615 00

External Dimensions: L 360 x W 200 x H 150 mm

Page 1-15, 16, 22

Standard Features
• 10093112 00 M6x45 Stainless steel captive combo head lid screws. • 10082003 00 3.3mm Neoprene Gasket (42.52" length).
Accessories
• 10086124 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061310 00 Terminal rails (TS 32). • 10061330 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089008 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082022 00 3mm RFI Gasket (42.52" length). • 10093215 00 M6.3x9.5 Self tapping screw for mounting plate.

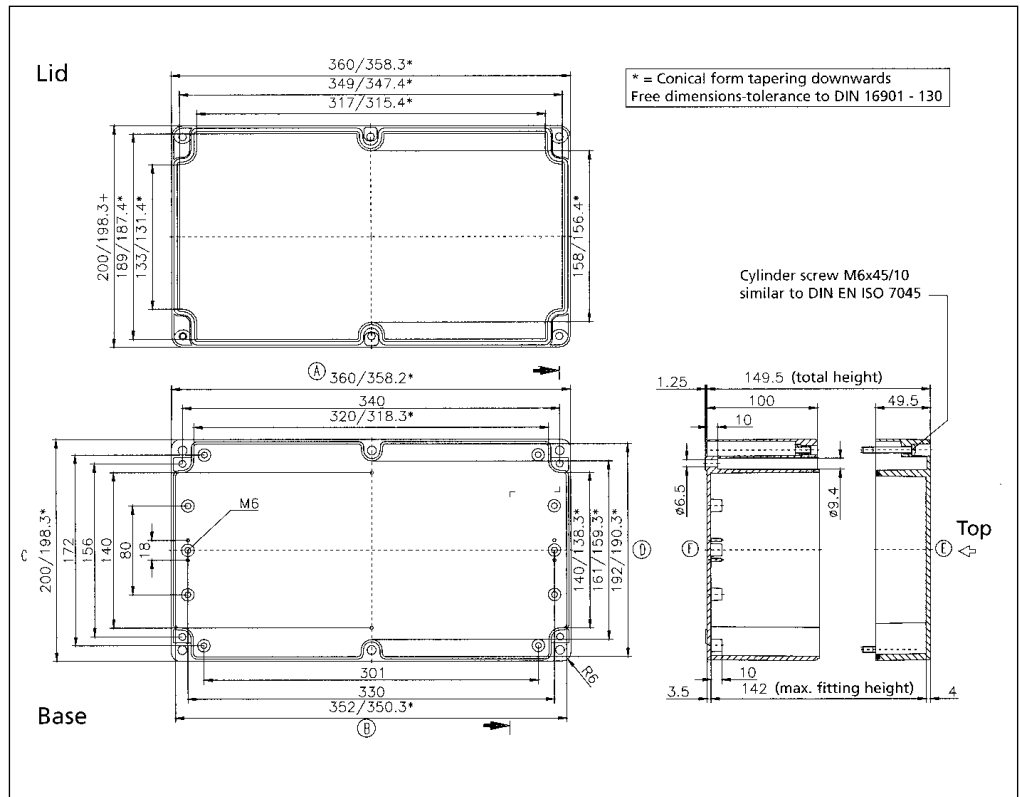


03233009 / 09233009 / 33233009 00

External Dimensions: L 300 x W 230 x H 85 mm

Page 1-15, 16, 22

Standard Features
• 10093045 00 M4x37 Stainless steel captive combo head lid screws. • 10082003 00 3.3mm Neoprene Gasket (41.73" length).
Accessories
• 10086123 00 Brass Mounting Inserts. • 10094110 00 Rubber Table feet. • 10052031 00 External Mounting Brackets. • 10061311 00 Terminal rails (TS 32). • 10061331 00 Terminal rails (TS 35). • 10052131 00 External Hinges. • 10089009 00 Mounting Plate. • 10082013 00 3.3mm Silicone gasket. • 10082022 00 3mm RFI Gasket (41.73" length). • 10093214 00 M4.7x7.8mm Self tapping screw for mounting plate.

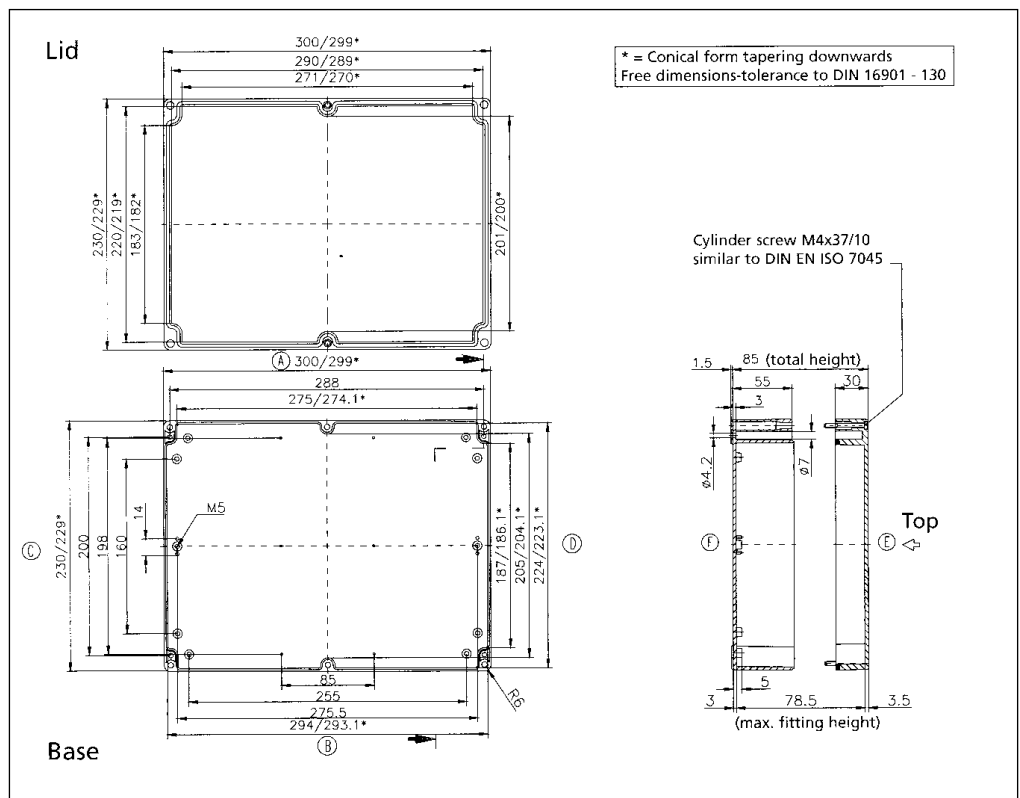

Page 1-15, 16, 22

- 10086123 00 Brass Mounting Inserts.
- 10094110 00 Rubber Table feet.
- 10052031 00 External Mounting Brackets.
- 10061311 00 Terminal rails (TS 32).
- 10061331 00 Terminal rails (TS 35).
- 10052131 00 External Hinges.
- 10089009 00 Mounting Plate.
- 10082013 00 3.3mm Silicone gasket.
- 10082022 00 3mm RFI Gasket (41.73" length).
- 10093214 00 M4.7x7.8mm Self Tapping screw for mounting plate.

