
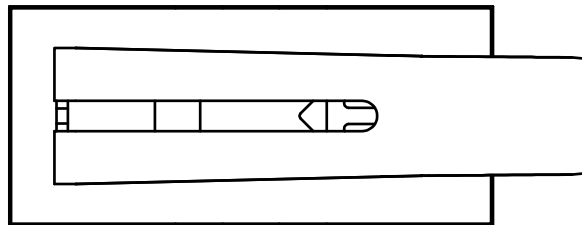
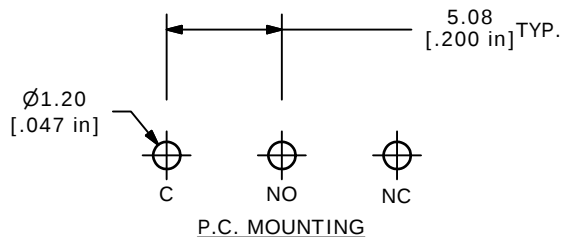



CIRCUIT: SPDT

O.P. (MM)	P.T. (MM)
9.65 ± 0.8	1.35 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- ▲3. RATING: 0.1A @125VAC UL
- ▲4. OPERATING FORCE: 30 TO 55 GRAMS
5. OPERATING TEMP: -25°C TO 75°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES MIN.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
10. ▲ DENOTES CRITICAL PARAMETER.
11. PACKAGED IN TRAYS, 120 PIECES PER TRAY.
12. 2002/95/EC (ROHS) COMPLIANT

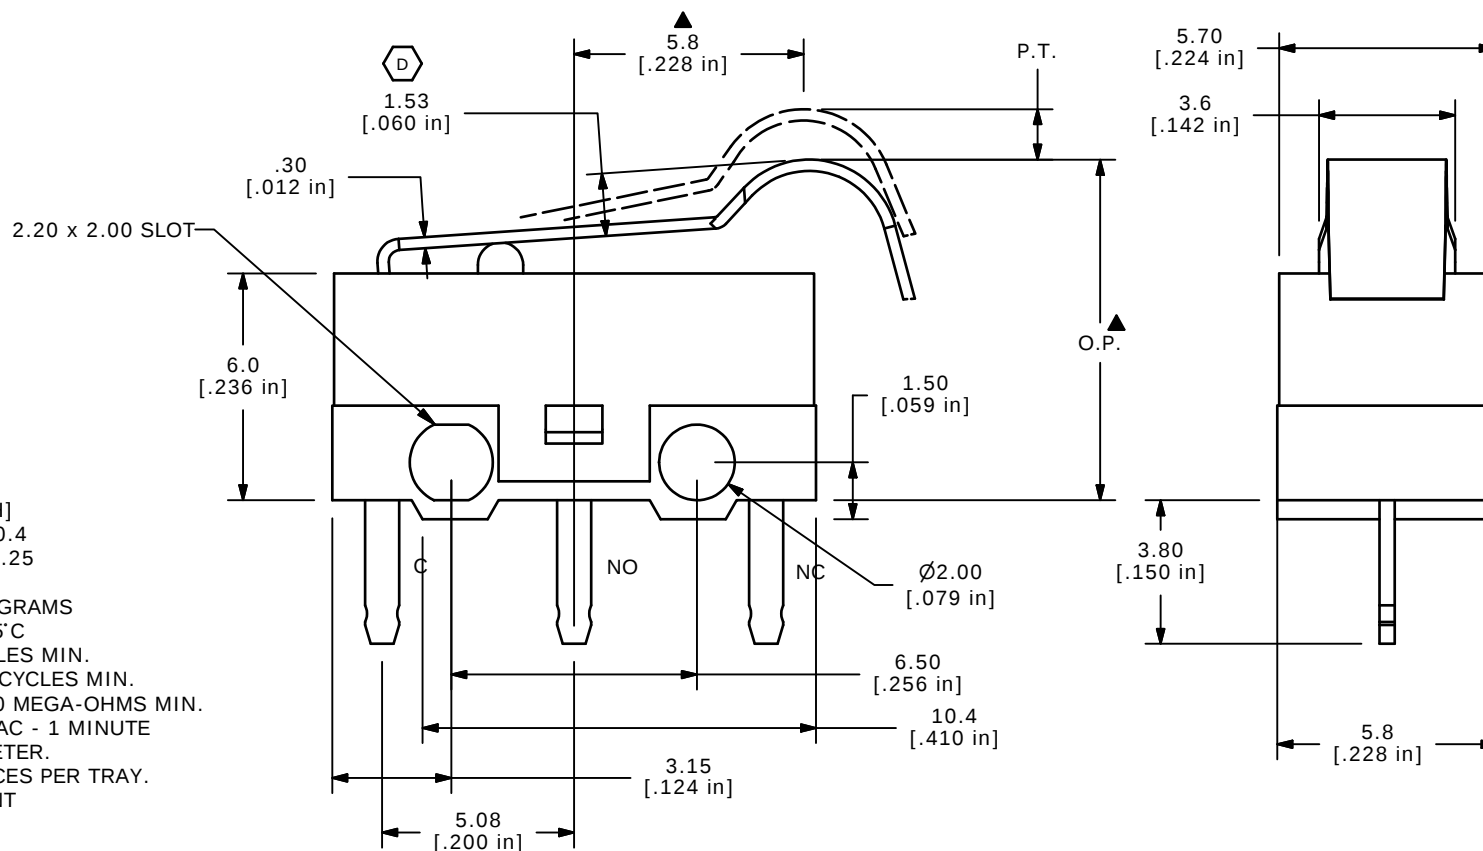

F	20588	FORCE WAS 50 +/-10 GRAMS	05/03/12	DRG
E	18499	OPERATING FORCE TOLERANCE CHANGE	4/23/09	BLR
D	18493	DIM FOR ACTUATOR ADDED	4/21/09	BLR
C	18157	REMOVE CE APPROVED FROM NOTES	6/24/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE SS075Q103F050P1A

SCALE 4:1

DATE 4/21/2009

DR	BLR
----	-----

DWG	Q971012
-----	---------

REV
F