

Features

Unregulated Converter

- 1 : 1 Input Range
- 0.25W SMD Package
- Efficiency up to 77%
- 1kVDC and 2kVDC Isolation Option
- Operating Temperature from -40°C to +100°C
- EN/UL60950-1 Certified

Description

The R0.25S/E series DC/DC converter has been designed to offer exceptionally high efficiency, low quiescent current and an extended operating temperature range. Uses include battery powered supplies, high efficiency designs or high temperature applications

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max Capacitive Load ^{(1)**}
R0.25S**-3.305/E*	3.3	5	50	75	1000µF
R0.25S**-0505/E*	5	5	50	77	1000µF
R0.25S**-1205/E*	12	5	50	74	1000µF

Other input and output voltage combinations available on request.

*add Suffix „H“ for 2kVDC Isolation, e.g. R0.25S-3.305/HE

*add Suffix „-R“ for tape & reel packaging, e.g. R0.25S-3.305/E -R

*add Suffix „P“ for Continuous Short Circuit Protection, e.g. R0.25S/PE

**without marking denotes 5 pins out of 8 fitted (includes „H“ option)

with marking 8 denotes 8 pins out of 8 fitted („H“ option not available), e.g. R0.25S8-3.305/E

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage full load and after warm up)

Input Voltage Range	±10% max.	
Voltage set accuracy	100% Load/nominal Vin	-2% typ. / ±5% max.
Line Regulation	Low Line to High Line @ max. Load	1,2% typ.
Load Regulation	(10% to 100% Load)	4% typ. / 10% max.
Ripple & Noise @ 20MHz BW	50mVp-p typ. / 100mVp-p max.	
Efficiency	100% Load	70% min.
Operating Temperature	-40°C to + 100°C	
Storage Temperature	-55°C to +125°C	
Isolation Test Voltage (Tested for 1 second)	R0.25S-xx05/E	1000VDC
	R0.25S-xx05/HE	2000VDC
Isolation Capacitance	75PF max.	
Isolation Resistance	Viso = 500V	10 GΩ min.
Humidity	95% max.	
Operating Frequency	Vin (nom.)	20kHz min. / 70 kHz max.
Short-Circuit Protection	1 Second	
MTBF	Using MIL-HDBK 217F (+100°C)	1352 x 10³ hours
	Using MIL-HDBK 217F (+25°C)	4494 x 10³ hours
Detailed Information see Application Notes chapter „MTBF“		
Weight	1.0g	
Certification		
UL General Safety	Report: E224736	UL60950-1
EN General Safety		EN60950-1

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

0.25 Watt SMD Isolated Single Output




E224736

EN-60950-1 Certified
UL-60950-1 Certified

R0.25S/E

Derating-Graph (Ambient Temperature)

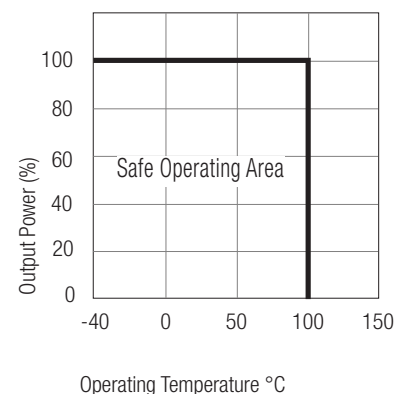


Refer to Application Notes

Typical Characteristics





Tolerance Envelope

R0.25S-xx05/E

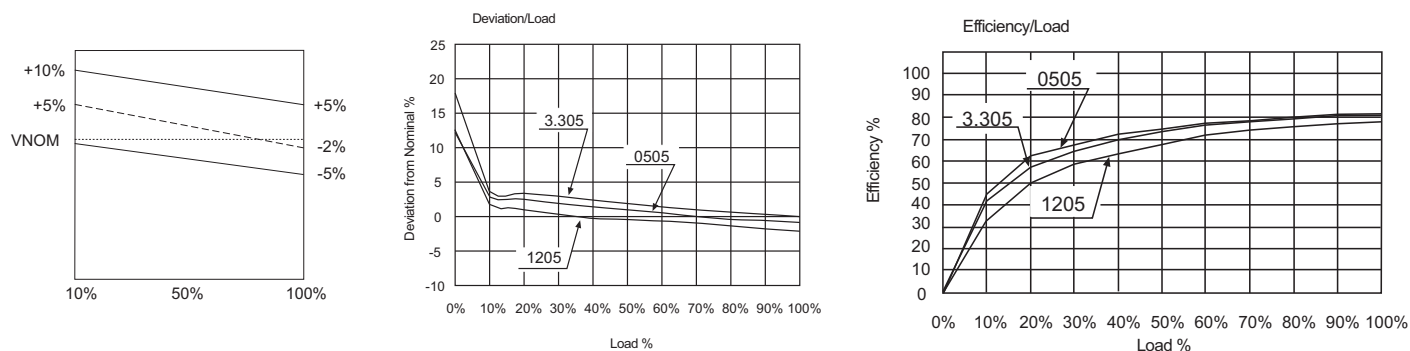

Package Style and Pinning (mm)

3rd angle projection

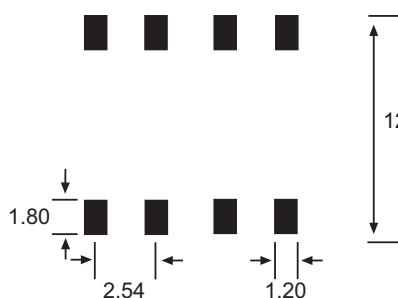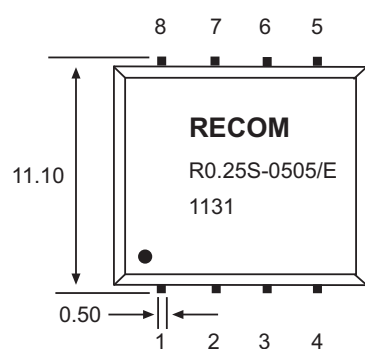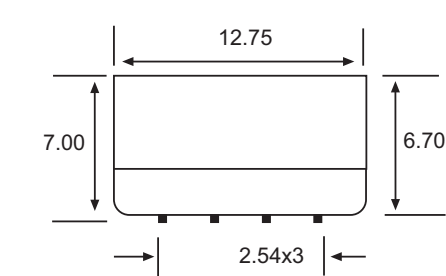

Pin Connections

Pin #	Function for 5 Pins	Function for 8 Pins
1	-Vin	-Vin
2	+Vin	+Vin
4	-Vout	-Vout
5	+Vout	+Vout
3, 6, 7	NA	NC
8	NC	NC

NC= No Connection

NA= No Available Electrical Connection

UNIT: mm

TOL.: ± 0.25 mm

Footprint