

Features

LED DRIVER

- Universal AC Input
- Constant Voltage / Constant Current Operation
- CE and UL Certified Class 1 LED Driver
- Active Power Factor Correction
- IP67 Design for Indoor and Outdoor Use
- Cooling by Free Air Convection

Selection Guide

Part Number	CV Mode		CC Mode		Efficiency (230VAC) (%)
	Constant Voltage (V)	Current Range (A)	DC Voltage Range (V)	Constant Current (A)	
RACD100-12	12	0-8.3	9-12	8.3	88
RACD100-24	24	0-4.2	14-24	4.2	90
RACD100-36	36	0-2.8	26-36	2.8	90
RACD100-48	48	0-2.1	34-48	2.1	91

Specifications

Input Voltage Range	90-305 VAC or 127-430VDC	
Input Frequency Range	47-63Hz.	
Power Factor	Full Load, 115VAC	>0.98
	Full Load, 230VAC	>0.95
	Full Load, 277VAC	>0.94
THD	Full Load, 115VAC	8% max.
AC Current	115VAC	0.7A max.
	230VAC	1.4A max.
Input/Output Isolation	3.75kVAC	
Input/Case Isolation	1.8kVAC	
Output/Case Isolation	0.5kVAC	
Leakage Current	240VAC	<0.75mA
Voltage Tolerance	-1% to 5%	
Set up Time	115VAC	1.5s
(@ Full Load)	230VAC / 277VAC	0.7s
Ripple & Noise	48V Version	200mV max.
	others	150mV max.
Over Current Protection	95%-105% rated current	Auto-Recovery
Short Circuit Protection	Hiccup Mode	
Over Voltage Protection	12V	15V typ.
Latch Mode	24V	31V typ.
(Power off to recover)	36V	45V typ.
	48V	58V typ.
Over Temperature Protection	Tcase 95°C ±10°C	
Operation Temperature	(Refer to Output Load Derating Curve)	-30°C to +70°C
Operation Humidity	20%-90% RH Non-Condensing	
Storage Temperature	-40°C to +80°C	
Storage Humidity	10%-90% RH	
Vibration	2G 10min/1Cycle, Period for 60 min	10-500Hz
IP Rating	IP67	
Safety Standards	UL/cUL LED Lighting Safety (E340696)	UL8750
	CE LVD Directive, Safety	EN61347-2-13
EMC Standards	EMC Compatibility	EN55015
		FCC, Part 15
	Harmonic Current	EN61000-3-2 Class C (≥75% load)
		EN61000-3-3
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 11
Dimension	222*68*39mm	
Weight	940g	
MTBF	using MIL-HDBK-217F (25°C)	250 x 10 ³ hours
Design Lifetime	70 x 10 ³ hours	

The use of a circuit breaker with C-characteristic is recommended.

LIGHTLINE
AC/DC-Converter
with 5 year Warranty

RECOM



**100 Watt
Single
Output**



**UL 8750 Certified
EN 61347 Certified**


RACD100

Derating Curve

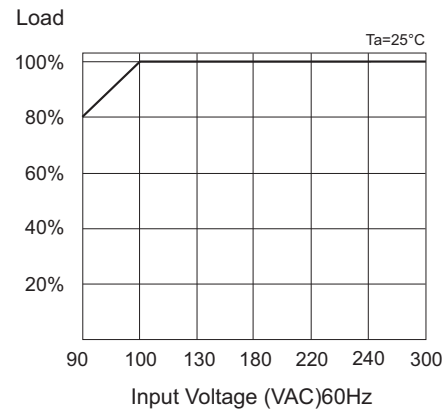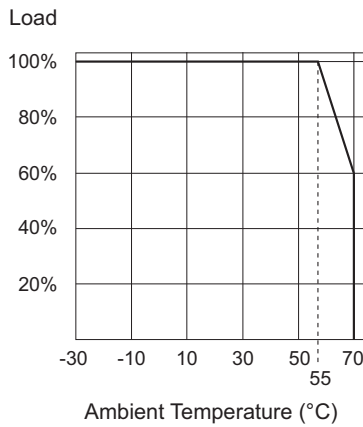

Characteristics

Constant Voltage / Constant Current Curve

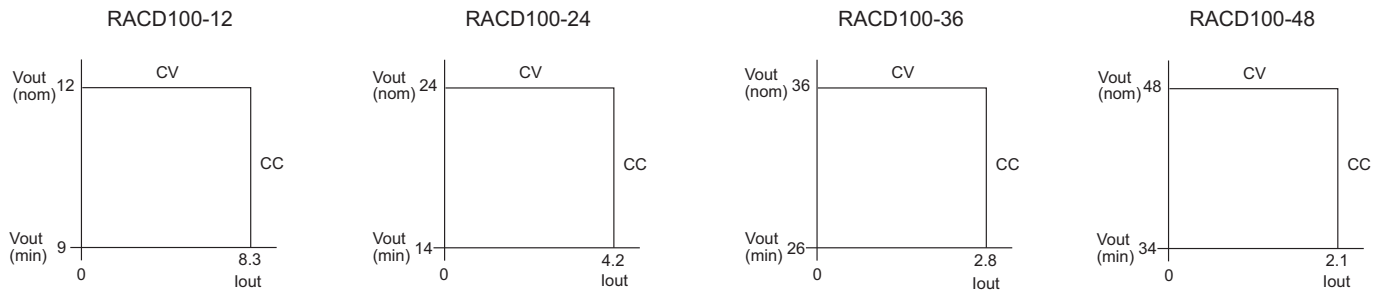

Package Style and Pinning

3rd angle projection

