


RIGID CASTERS

CASBRR,CASERR,CASPPR,CASPUR
,CASNYR

- Consists of a wheel mounted to a stationary fork; no swivel
- The orientation of the fork, which is fixed relative to the device, is determined when the caster is mounted
- Restricts motion along a straight path
- Light & Medium duty housing: Zinc-Plated Steel
- Heavy duty housing: Solid Steel welded construction

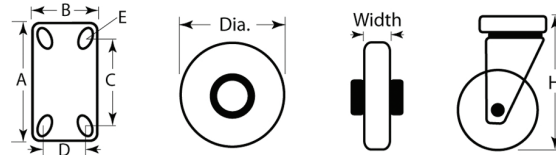

Nylon
Medium Duty



Nylon
Heavy Duty



Polyurethane
Medium Duty



Polyurethane
Heavy Duty



Black Rubber



Elastic Rubber



Plastic Low Profile

Standard Pack: 4 per bag

Part No.	Material	Approx. Load Capacity Lbs.	Duty	Nominal Ø	Wheel Width	"H" Overall Height	"A"	"B"	"C"	"D"	"E" Bolt Hole	Wheel Bearing
CASBRR05A	Black Rubber	88	Light	3.0 (76.2)	.90 (22.9)	3.81 (96.8)	3.30 (83.8)	2.83 (71.9)	2.44 (62)	1.96 (49.8)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASBRR10A		132	Light	4.0 (101.6)	1.06(26.9)	5.11 (129.8)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASBRR015A		220	Medium	5.0 (127)	1.33 (33.8)	6.10 (154.9)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASERR05A	Elastic Rubber	88	Light	3.0 (76.2)	1.29 (32.8)	4.09 (32.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASERR10A		132	Light	4.0 (101.6)	1.29 (32.8)	5.19 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASERR15A		220	Medium	5.0 (127)	1.33 (33.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPPR05A	Plastic Low Profile	154	Medium	2.0 (50.8)	.90 (22.9)	2.48 (63)	2.63 (66.8)	1.88 (47.8)	2.12 (53.8)	.94 (23.9)	Ø.24 (6.1)	Plain
CASPPR10A		165	Medium	2.5 (63.5)	.86 (63.5)	3.30 (21.8)	3.74 (95)	2.75 (69.9)	2.99 (75.9)	1.75 (75.9)	Ø.35 (8.9)	
CASPUR05A	Polyurethane	176	Medium	3.0 (76.2)	1.25 (31.8)	4.09 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Precision Ball Bearing
CASPUR10A		264	Medium	4.0 (101.6)	1.25 (31.8)	5.19 (131.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPUR15A		330	Medium	5.0 (127)	1.25 (31.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Steel Roller Bearing
CASPUR25A		308	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASPUR30A		440	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASPUR35A		485	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYR05A	Nylon	176	Medium	3.0 (76.2)	.98 (24.9)	3.70 (93.9)	2.75 (69.9)	2.28 (57.9)	2.16 (54.9)	1.65 (41.9)	Ø.33 (8.4)	Plain
CASNYR10A		220	Medium	4.0 (101.6)	1.06 (26.9)	4.76 (120.9)	3.93 (99.8)	2.28 (57.9)	3.22 (81.8)	1.57 (39.9)	Ø.33 (8.4)	
CASNYR25A		661	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Precision Double Ball Bearing
CASNYR30A		881	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYR35A		1102	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	