

Customer Information Sheet

DRAWING No.: S1721-XXR

SHEET 2 OF 2






IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION




ALL DIMENSIONS IN mm

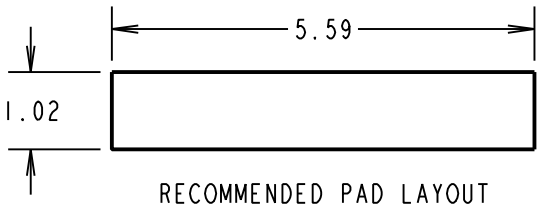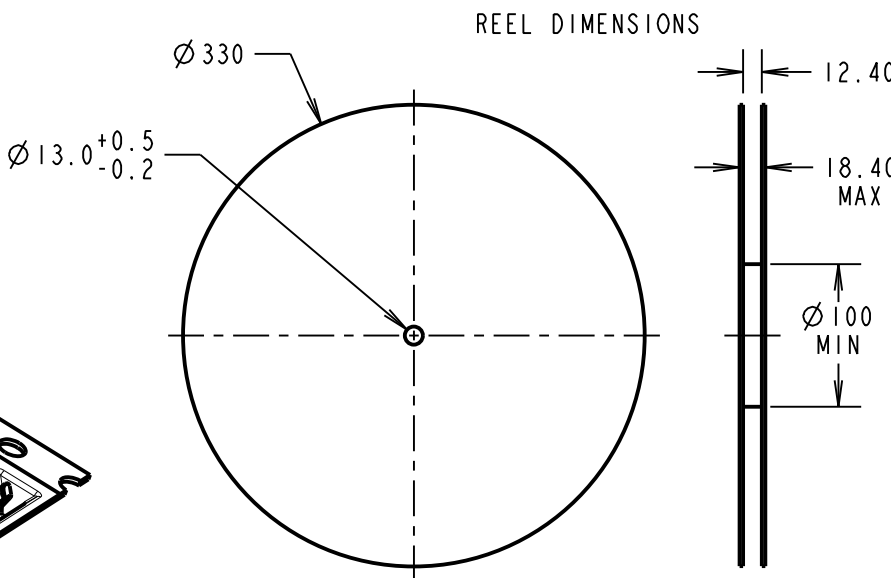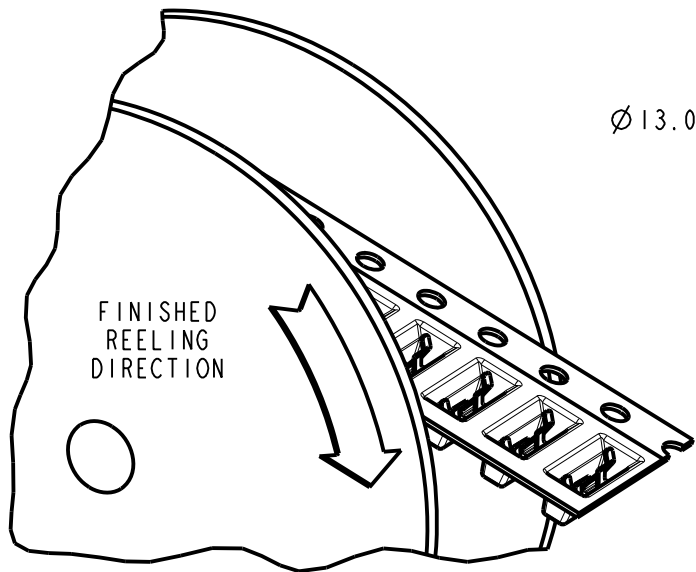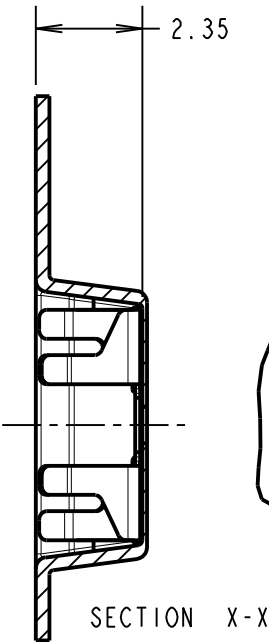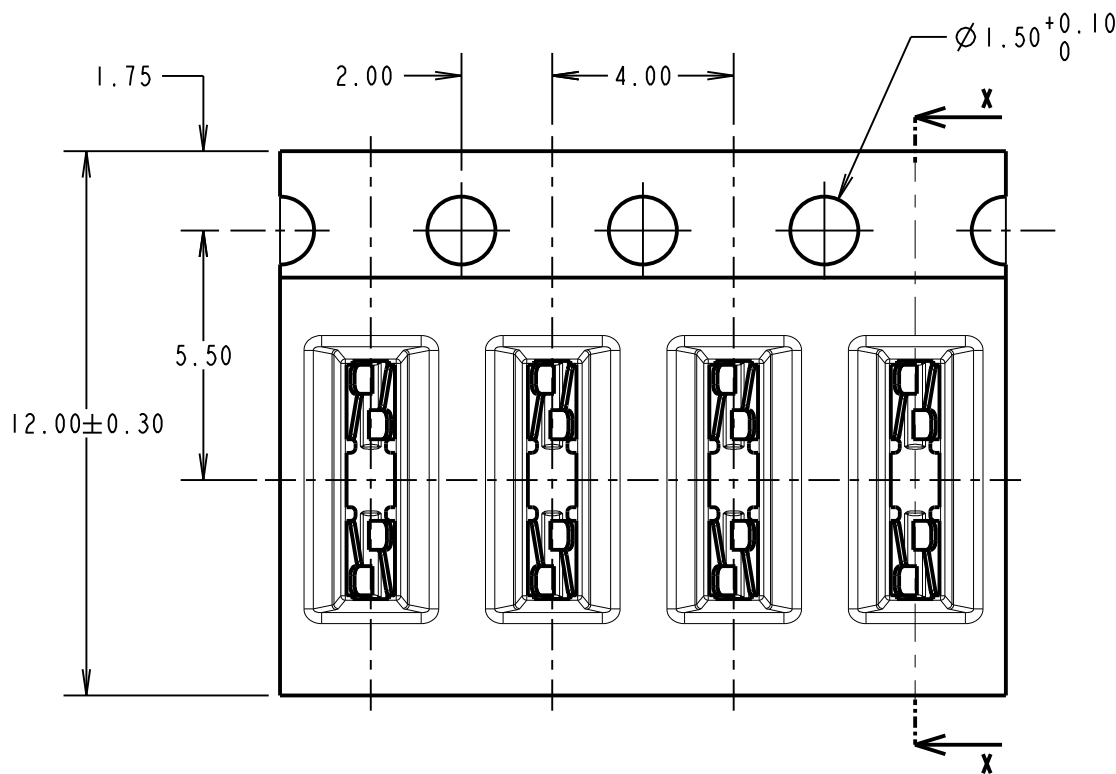


- NOTES:
1. QUANTITY PER REEL = 5,000
 2. THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

COMPONENT SPECIFICATION:
MATERIAL = BERYLLIUM COPPER
FINISH:
06 = 3µ 90/10 TIN/LEAD
46 = 3µ 100% TIN, OVER
2.0µ NICKEL
SHIELD THICKNESS = 0.13-0.23mm


PERFORMANCE SPECIFICATION:
ENGAGEMENT FORCE = 5N MAX.
DISENGAGEMENT FORCE = 0.35N MIN.
DURABILITY = 15 ACTUATIONS MIN.
CONTACT RESISTANCE = 40mΩ MAX.

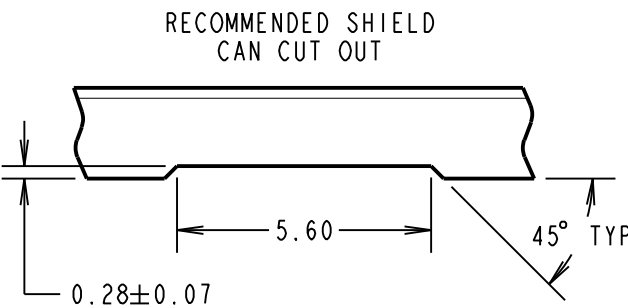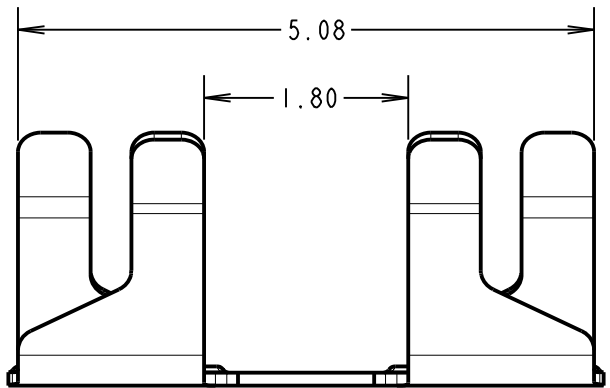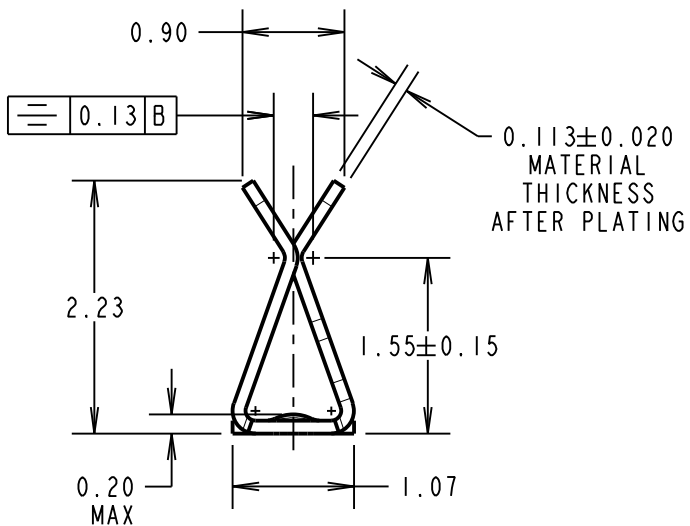

SINGLE COMPONENT DIMENSIONS

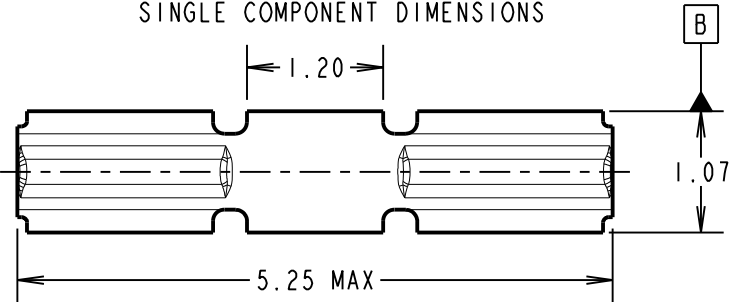

ORDER CODE:	FINISH:
S1721-06R	TIN/LEAD
S1721-46R	100% TIN

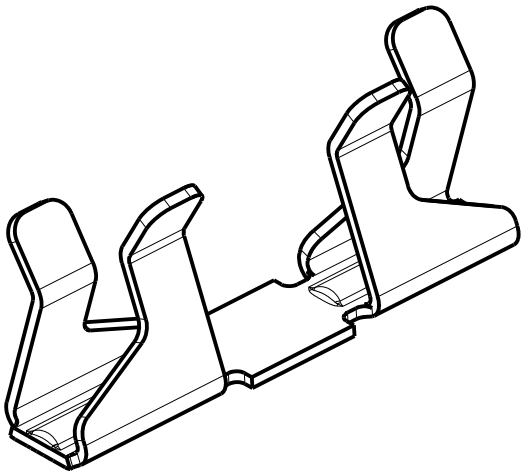

SF	6	26.06.13	12129
NAME	ISS.	DATE	C/NOTE
APPROVED: S.FLOWER			
CHECKED: M.PLESTED			
DRAWN: M. G. PLESTED			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

MINI SMT RFI SHIELD CLIP
IN TAPE AND REEL

DRAWING NUMBER:

S1721-XXR

SHT

2

OF

2