
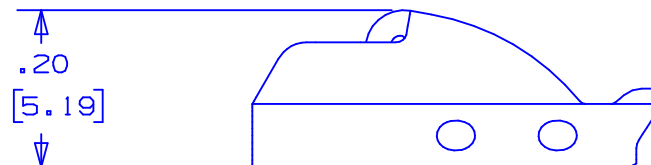



NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBH-MR & MBH-TLR.
2. APPLICATION TOOL: GS4MT, ST2MT, PPTMT, ST3MT,^(A) OR HTMT.
3. TOOL TENSION SETTING: 4 TO 8 (GS4MT AND PPTMT ONLY)
4. DIMENSIONS IN [] ARE MILLIMETERS.
- ^(B) 5. MINIMUM LOOP TENSILE STRENGTH: 250 LBS (1112 N)
6. TOLERANCES: .X = $\pm .030$ [$\pm .762$]
 .XX = $\pm .020$ [$\pm .508$]
 .XXX = $\pm .010$ [$\pm .254$]
 ANGLES = $\pm 2^\circ$

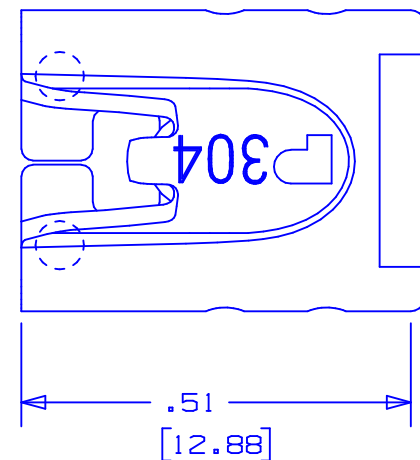

S41130_01

								 PANDUIT CORP. TINLEY PARK, ILLINOIS	
01	10/03	BRH	DPN	^(A) ADDED ST3MT TO APPLICATION TOOL NOTE.	11162	CCH	JJB		
				^(B) ADDED TENSILE STRENGTH NOTE.					
00	11/02	JAMB	DPN	RELEASED	10401	CCH	JJB	METAL TIE HEAD HEAVY PART# MTHH-C 304 STAINLESS STEEL	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY JAMB	CHK'D DPN SCALE 4× DRAWING NO. S41130