

Specifications

Rated Voltage: 16VDC







Rated Current: 300mA

Contact Resistance: 100 mOHMS or less under all conditions including after life testing.

Insulation Resistance: 100 M OHMS or greater at 500VDC

Voltage: 250V AC RMS for 1 Minute

Life: 5,000 cycles min.

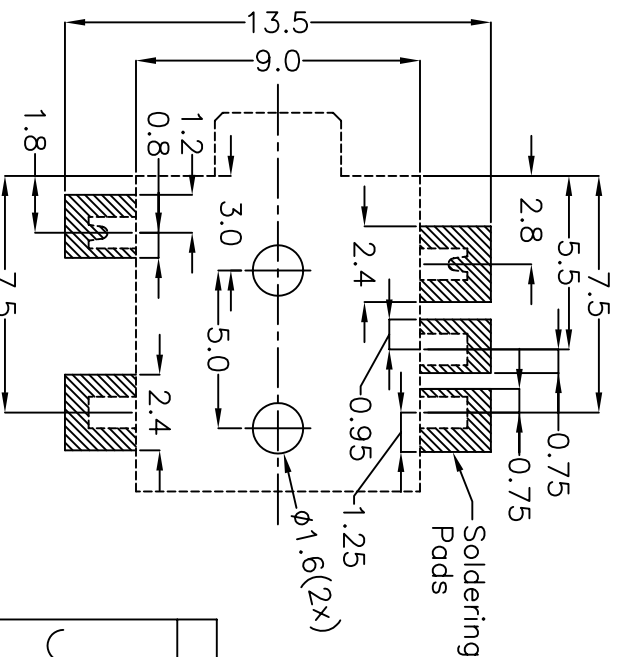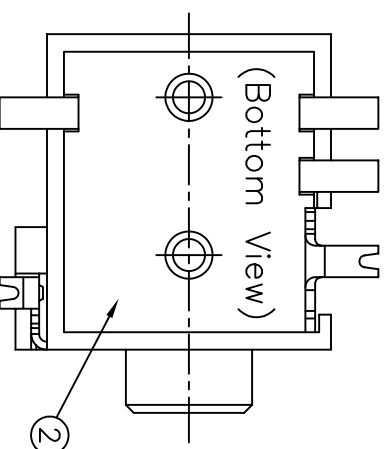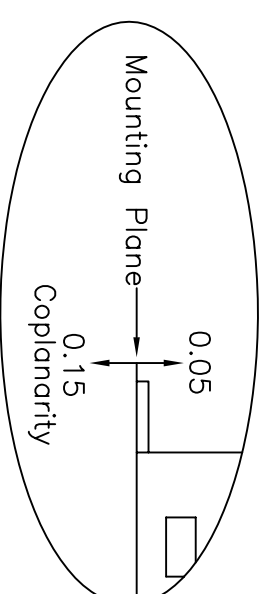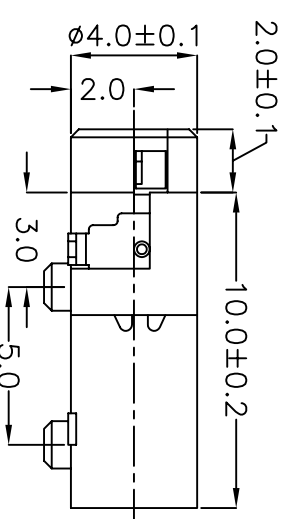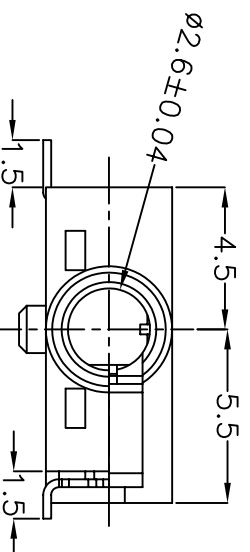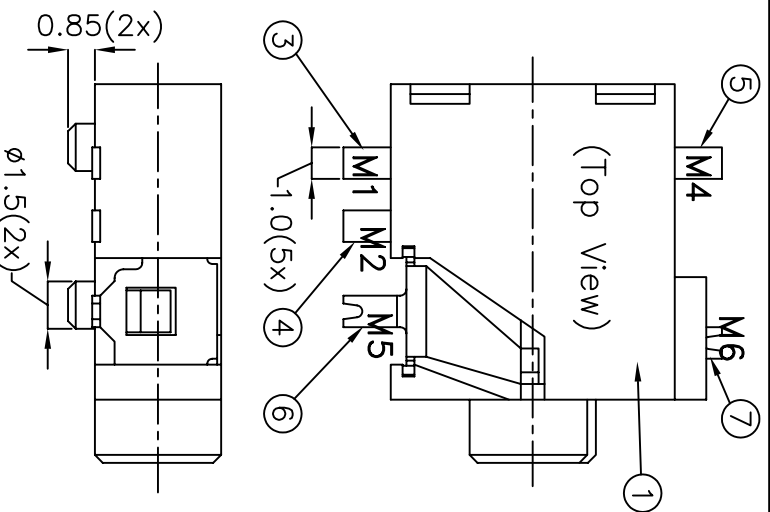

7	Ground<M6>	PBS		Gold Flash	30T
6	Signal<M5>	PBS		Gold Flash	30T
5	Tip Contact<M4>	Ti-Cu Alloy		Gold Flash	20T
4	Shunt (Ring)<M2>	Brass		Gold Flash	30T
3	Ring Contact<M1>	Ti-Cu Alloy		Gold Flash	20T
2	Cover	PY6T	Black		UL94V-0 Rated
1	Plastic Housing<P1>	Polyamide	Black		UL94V-0 Rated
Item	Term	Material	Color	Plating	Remark



CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

SMT Audio Jack w/4 Conductors 2.5mm

PART NO.

SJ-42515RS-SMT

UNITS:

Millimeters

DRAWN BY:

Todd R. White

APPROVED BY:

SCALE:

4x