


▲ LED SPECIFICATION		
Column 1	Column 2	Column 3
LED PARAMETER	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @ 20 mA	V	2.0-2.6
LUMINOUS INTENSITY	mcd	42-100

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CIRCUIT: SPST OFF-MOMENTARY ON
5. CONTACT MATERIAL: Gold over SILVER
- ▲ 6. RATING: 125mA @ 125 VAC
100mA @ 50 VDC
- ▲ 7. ELECTRIC LIFE: 500,000 CYCLES AT FULL LOAD
8. CONTACT RESISTANCE: 50 milli-OHM max. (INITIAL)
9. INSULATION RESISTANCE: 1,000 MEGA-OHM min. @ 500VDC.
10. DIELECTRIC STRENGTH: 1,000 VAC rms.
- C 11. OPERATING FORCE: 350 gf +/- 150 gf
12. OPERATING TEMPERATURE: -30°C TO +85°C.
13. CONTACT BOUNCE: 10ms MAX.
- ▲ 14. TRAVEL: 1.5mm
15. PANEL THICKNESS RANGE: 1.5 - 4.0 mm.
16. ▲ DENOTES CRITICAL PARAMETER.
17. 2002/95/EC (ROHS) COMPLIANT
18. MAX. MOUNTING TORQUE: 1.5 Nm APPLIED TO THE NUT
19. HARDWARE INCLUDED:
 - (1) T081101 LOCK WASHER
 - (1) T081102 HEX NUT
 - (1) T081100 RUBBER WASHER




- B
20. SEAL RATING: IP65

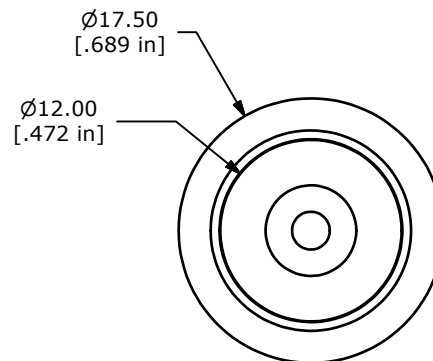

▲ **ACTUATOR:
COLOR WHITE**

**HOUSING:
BLACK**

▲ **THREAD:
M12 x 0.75**

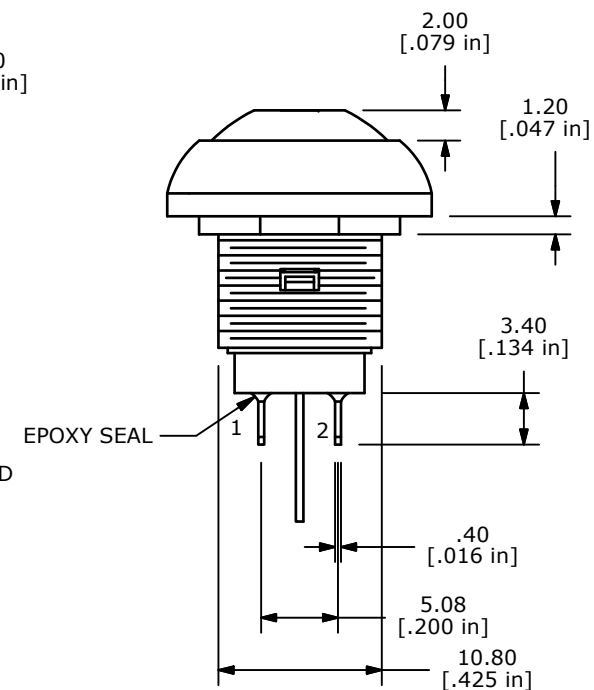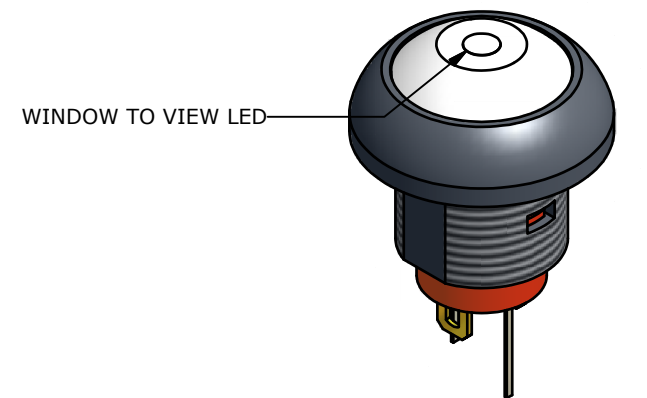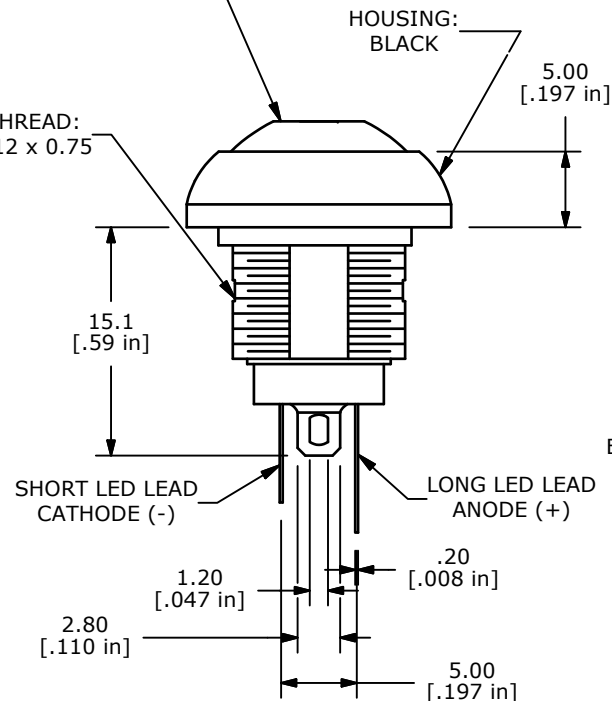

C	19457	CORRECT NOTE / DRAWING CLEAN UP	11/23/10	BMA
B	19358	MISC. DRAWING UPDATES	10/26/10	BMA
A	18444	Release for Production	3/25/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE **RP81xxB2M1CEBLKWHTGRN**

SCALE **2 : 1**

DATE **3/25/2009**

DR **BLR**

DWG **ST081039**

REV **C**