

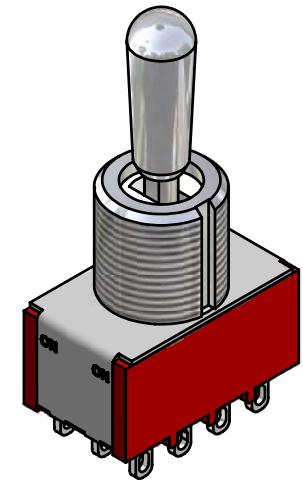


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9, 11-12	OPEN	2-1, 5-4, 8-7, 11-10

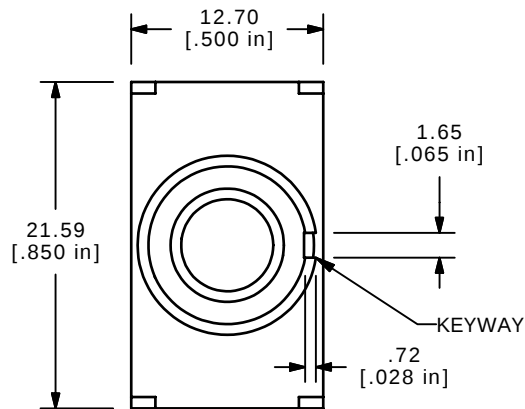



ISOMETRIC

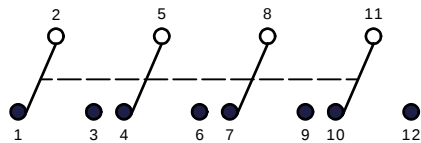

CIRCUIT: 4PDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- RATING: 5A @ 120VAC OR 28VDC
2A @ 250VAC
- ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 M Ω min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- HARDWARE TO BE SHIPPED BULK
T100004 - HEXNUT - QTY 2
T100012 - LOCKWASHER - QTY 1
T100003 - LOCKRING - QTY 1
- ▲ DENOTES CRITICAL PARAMETER.

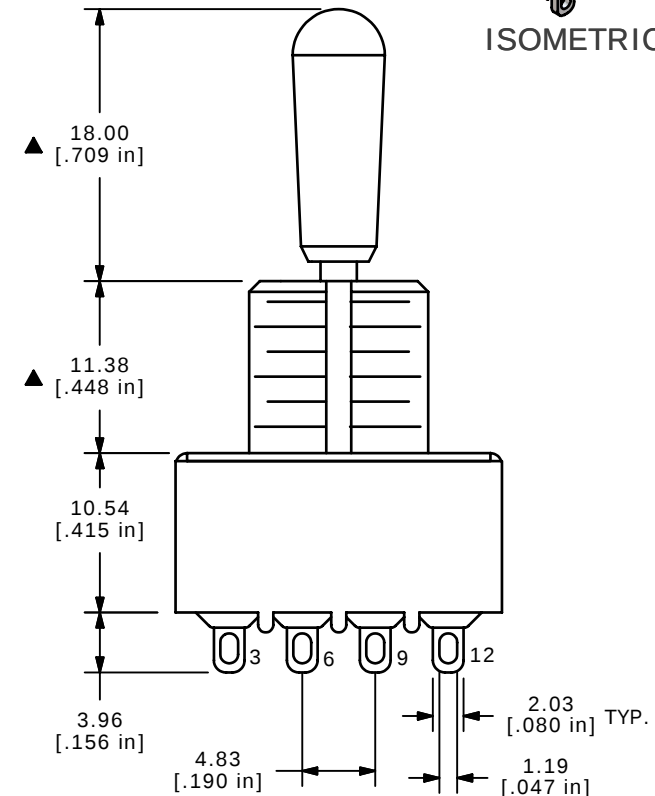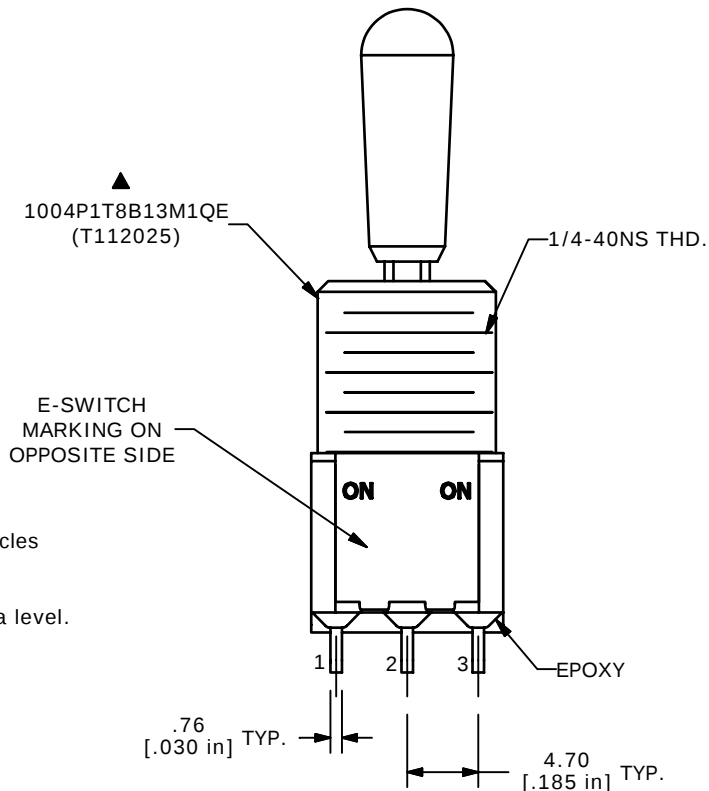**E-SWITCH®**

A	14936	RELEASED FOR PRODUCTION	5/20/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 1004P1T8B13M1QEH

SCALE 2:1

DATE 5/20/2005

DR JB

DWG ST112025

REV A