




P.C. MOUNTING

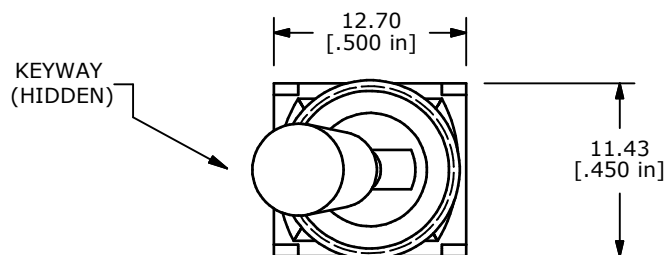

ISOMETRIC



SWITCH FUNCTION			(ON) = MOMENTARY
POS. 1	POS. 2	POS. 3	
(ON)	OFF	(ON)	
2-3, 5-6	OPEN	2-1, 5-4	



CIRCUIT: DPDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: GOLD
- RATING: 0.4 VA MAX. @ 20 VAC OR VDC MAX.
- ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- HARDWARE TO BE SHIPPED BULK:
T100012 - LOCK WASHER (1)
T100003 - LOCK RING (1)
T100004 - HEX NUTS (2)

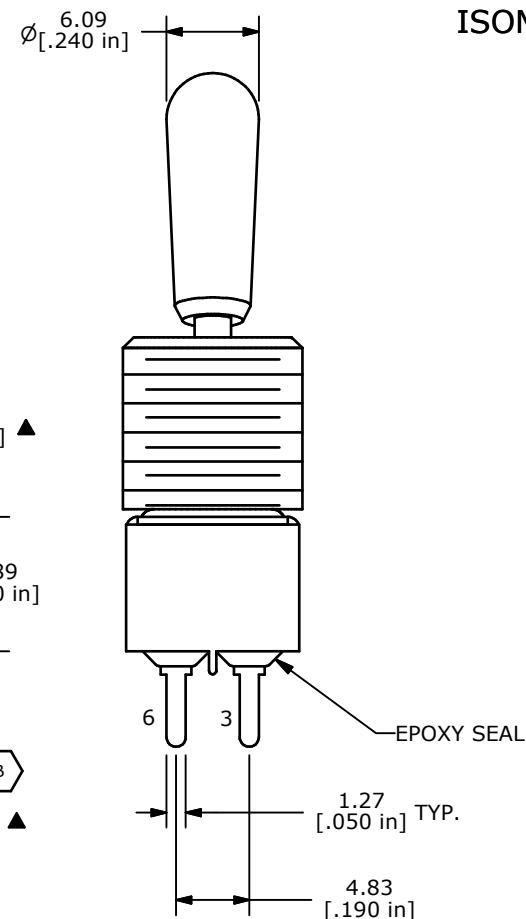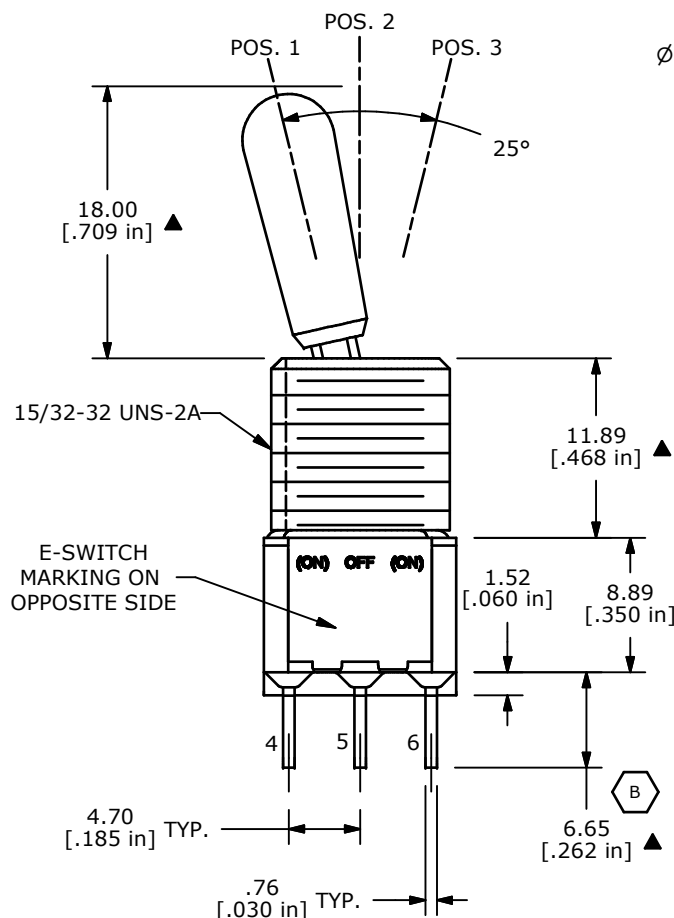

B	18118	ADJUST DIMENSION	5/30/08	BLR
A	16364	RELEASED FOR PRODUCTION	8/23/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP4T8B13M2REH

SCALE 2:1

DATE 5/30/2008

DR BLR

DWG ST124004

REV B