


RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION			
	POS. 1	POS. 2	POS. 3
			
DN		NONE	(DN)
2-3		OPEN	2-1

$\langle \rangle$ = Momentary



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4(VA) @20V max. (AC or DC)
5. FIXED TERMINAL & MOVING CONTACT:

Copper Alloy w/Gold plate over
Nickel plate.

6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. HARDWARE TO BE SHIPPED BULK
T200000-LOCK WASHER-QTY. 2
T200002-LOCK RING-QTY-1
T200001-HEX NUT-QTY-1

A	15317	RELEASED FOR PRODUCTION	9/23/05 PH
REV.	ECN NO.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR REPRODUCED			
			CHKD

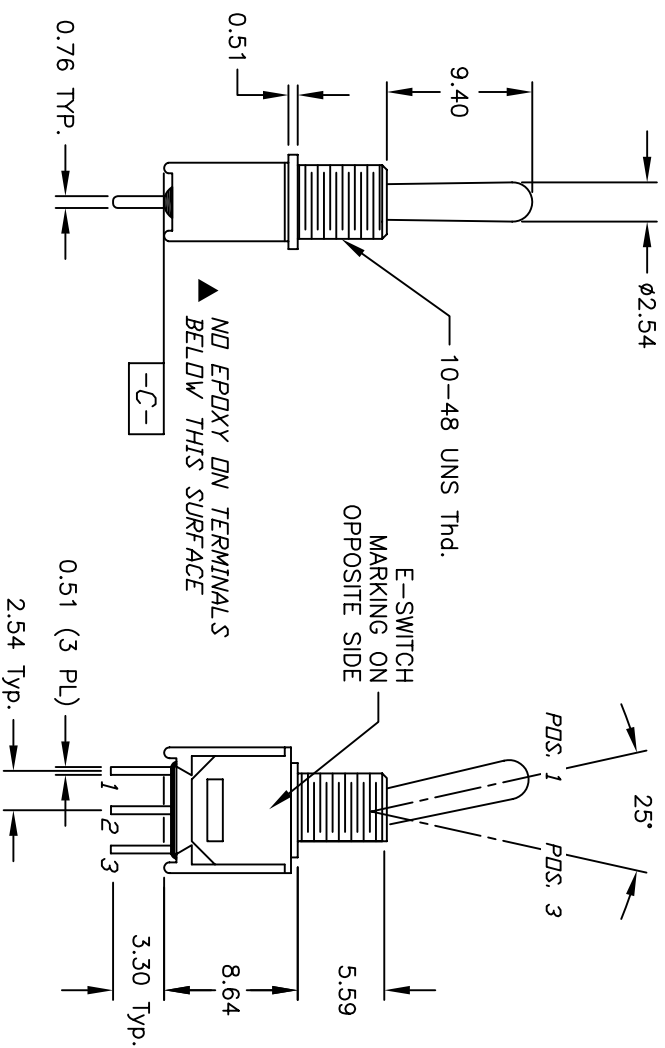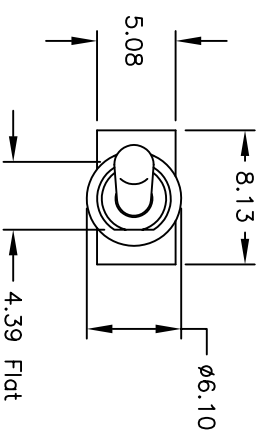

E-SWITCH®				
TITLE				
200MSP2T1B1M2REH				
SCALE	DATE	DR	DWG	REV
2:1	9/23/05	PH	ST212033	A