


SWIVEL BRAKE CASTERS

CASBRSWB,CASERSWB,CASPPSWB,
CASPUWB,CASNYSWB



- Caster is totally immobile when the brake is applied
- Brake applied with an easy step on the locking pad
- Light & Medium duty housing: Zinc-Plated Steel
- Heavy duty housing: Solid Steel welded construction

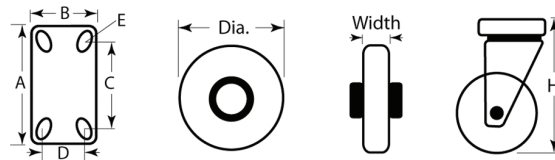

Nylon
Medium Duty



Nylon
Heavy Duty



Polyurethane
Medium Duty



Polyurethane
Heavy Duty



Black Rubber



Elastic Rubber



Plastic Low Profile

Standard Pack: 4 per bag												
Part No.	Material	Approx. Load Capacity Lbs.	Duty	Nominal Ø	Wheel Width	"H" Overall Height	"A"	"B"	"C"	"D"	"E" Bolt Hole	Wheel Bearing
CASBRSWB05A	Black Rubber	88	Light	3.0 (76.2)	.90 (22.9)	3.81 (96.8)	3.30 (83.8)	2.83 (71.9)	2.44 (62)	1.96 (49.8)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASBRSWB10A		132	Light	4.0 (101.6)	1.06 (26.9)	5.11 (129.8)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASBRSWB15A		220	Medium	5.0 (127)	1.33 (33.8)	6.10 (154.9)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASERSWB05A	Elastic Rubber	88	Light	3.0 (76.2)	1.29 (32.8)	4.09 (32.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASERSWB10A		132	Light	4.0 (101.6)	1.29 (32.8)	5.19 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASERSWB15A		220	Medium	5.0 (127)	1.33 (33.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPPSWB05A	Plastic Low Profile	154	Medium	2.0 (50.8)	.90 (22.9)	2.48 (63)	2.63 (66.8)	1.88 (47.8)	2.12 (53.8)	.94 (23.9)	Ø.24 (6.1)	Plain
CASPPSWB10A		165	Medium	2.5 (63.5)	.86 (63.5)	3.30 (21.8)	3.74 (95)	2.75 (69.9)	2.99 (75.9)	1.75 (75.9)	Ø.35 (8.9)	
CASPUWB05A	Polyurethane	176	Medium	3.0 (76.2)	1.25 (31.8)	4.09 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Precision Ball Bearing
CASPUWB10A		264	Medium	4.0 (101.6)	1.25 (31.8)	5.19 (131.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPUWB15A		330	Medium	5.0 (127)	1.25 (31.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPUWB25A		308	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Steel Roller Bearing
CASPUWB30A		440	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASPUWB35A		485	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSWB05A	Nylon	176	Medium	3.0 (76.2)	.98 (24.9)	3.70 (93.9)	2.75 (69.9)	2.28 (57.9)	2.16 (54.9)	1.65 (41.9)	Ø.33 (8.4)	Plain
CASNYSWB10A		220	Medium	4.0 (101.6)	1.06 (26.9)	4.76 (120.9)	3.93 (99.8)	2.28 (57.9)	3.22 (81.8)	1.57 (39.9)	Ø.33 (8.4)	
CASNYSWB25A		661	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Precision Double Ball Bearing
CASNYSWB30A		881	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSWB35A		1102	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	