
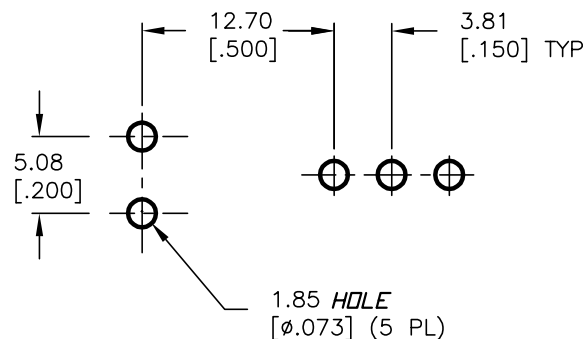






RECOMMENDED PCB LAYOUT

SPDT CIRCUIT
CONTACT CONFIGURATION



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
5. FIXED TERM. & MOVING CONTACT: SILVER PLATE.
6. MECHANICAL LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

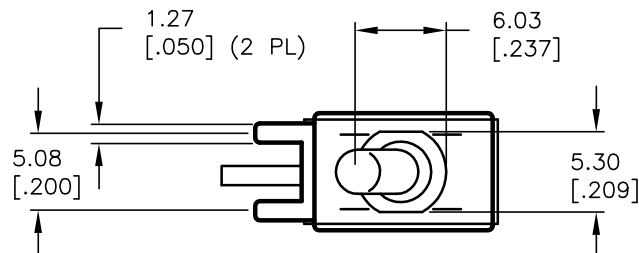

SECTION A-A

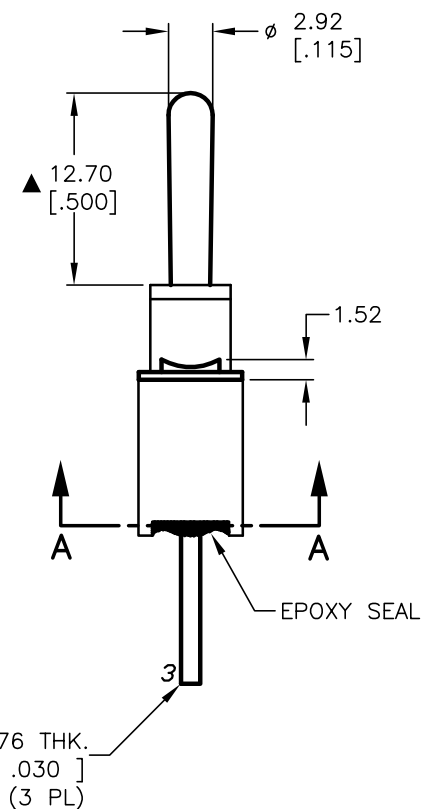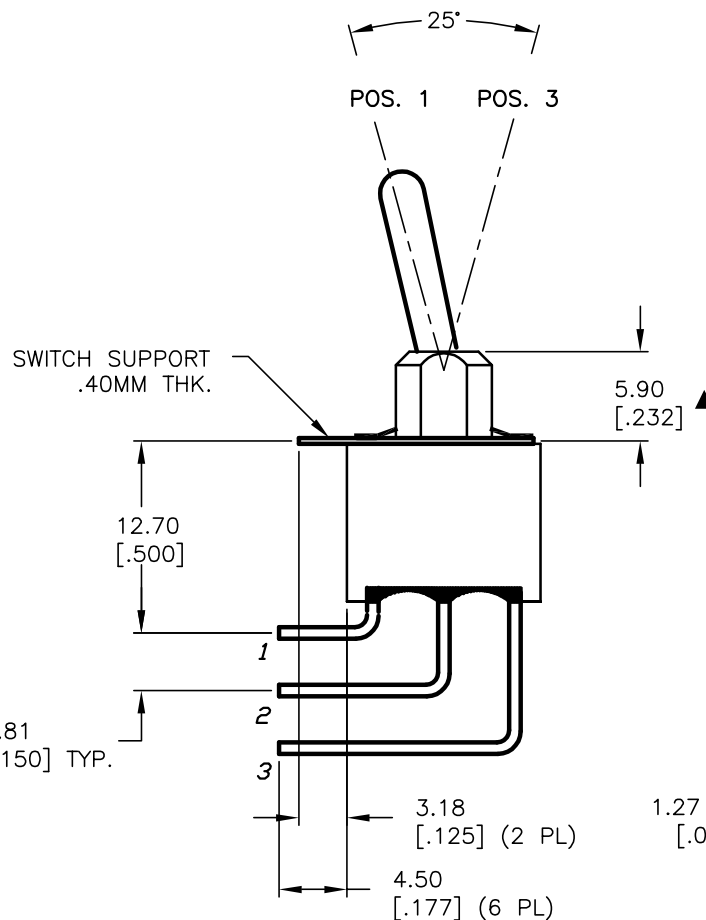**E-SWITCH®**

TITLE

100AWSP1T1B4M7QE

SCALE

2:1

DATE

6/15/04

DR

AR

DWG

T101009

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	14095	RELEASED FOR PRODUCTION	6/15/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD