



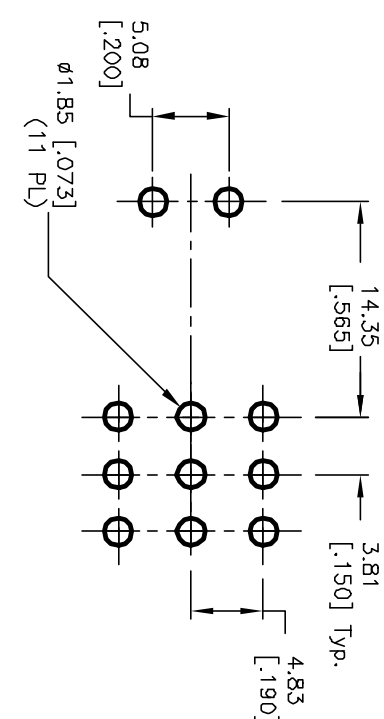

RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	NONE	DN
2-3,5-6 8-9	OPEN	2-1,5-4 8-7




- NOTES:
- CIRCUIT: 3PD

1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
 X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. RATING: 0.4 (VA) Max. @20V Max.
 5. CONTACT MATERIAL:

Copper Alloy W/GOLD Plate over Nickel plate.

6. **ELECTRIC LIFE:** 50,000 make-and-break cycles at full load.
7. **INSULATION RESISTANCE:** 1,000 Mega-ohm min.
8. **DIELECTRIC STRENGTH:** 1,000 V RMS @sea level
9. **OPERATING TEMP.:** -30°C to 85°C

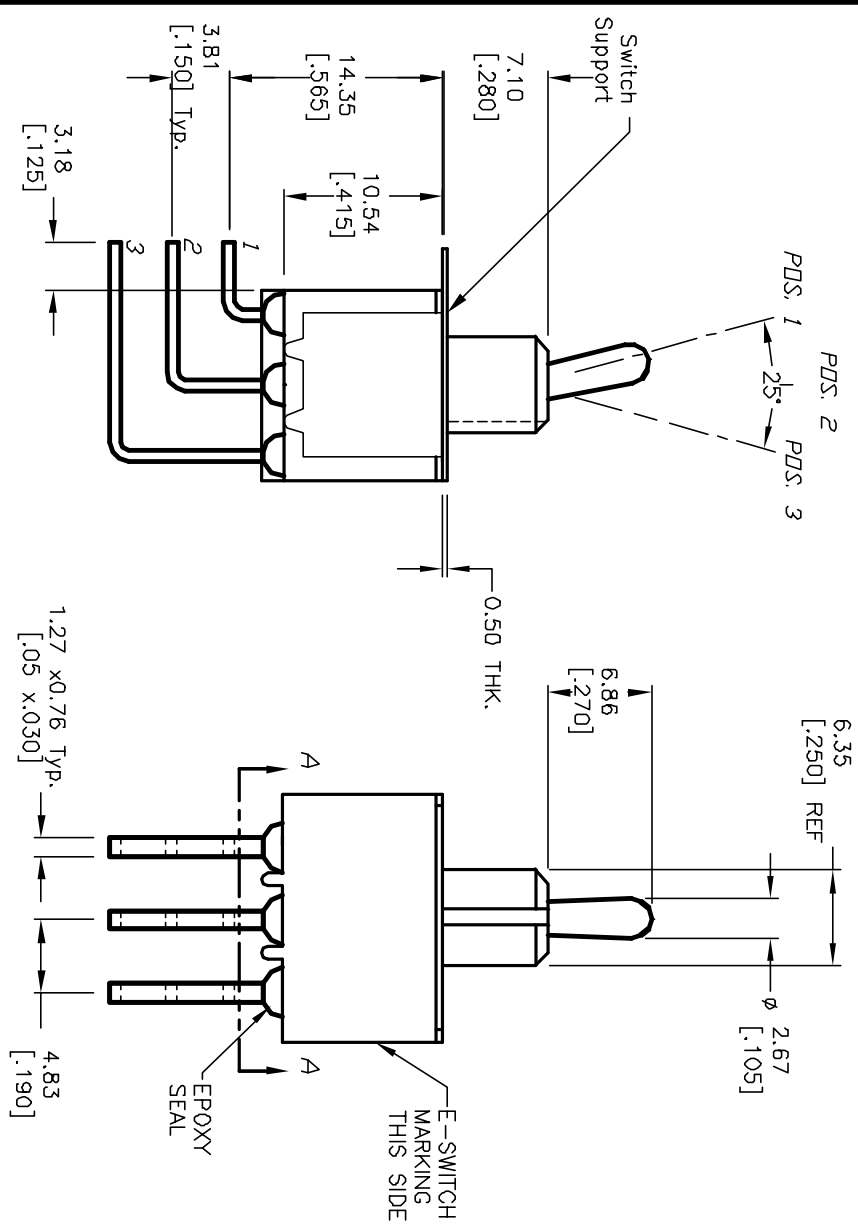**E-SWITCH®**

				TITLE				
F	12078	REVISED NOTES	4/19/02	CJB	100 3P-1 T2 B4 M7 R E (GOLD CONTACTS)			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								
SCALE		DATE	IDR	INVC	REV			
2:1		5/26/98	MM	T131001	F			