



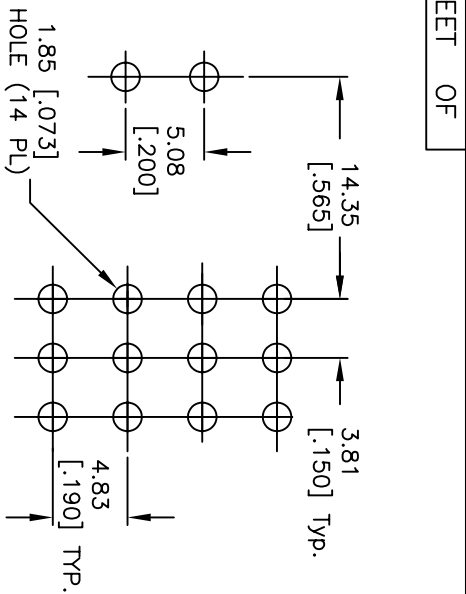

RECOMMENDED P.C.B. LAYOUT

SCALE: 2X



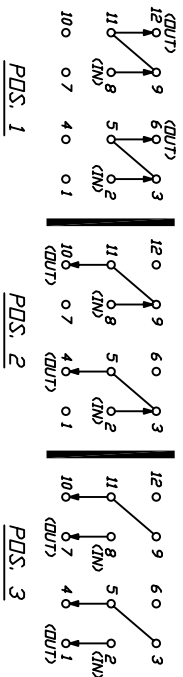


CIRCUIT: 4PDT 3-WAY

SWITCH FUNCTION			
PDS. 1 DN	PDS. 2 DN	PDS. 3 DN	
2-3,5-6	2-3,5-4	2-1,5-4	
8-9,11-12	8-9,11-10	8-7,11-10	

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 5A @120VACor 28VDC
2A @250VAC. w/resistive loads
- CONTACT & TERM MATERIAL:
Cu Alloy w/Silver plate.
- ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- 2002/95/EC (ROHS) COMPLIANT

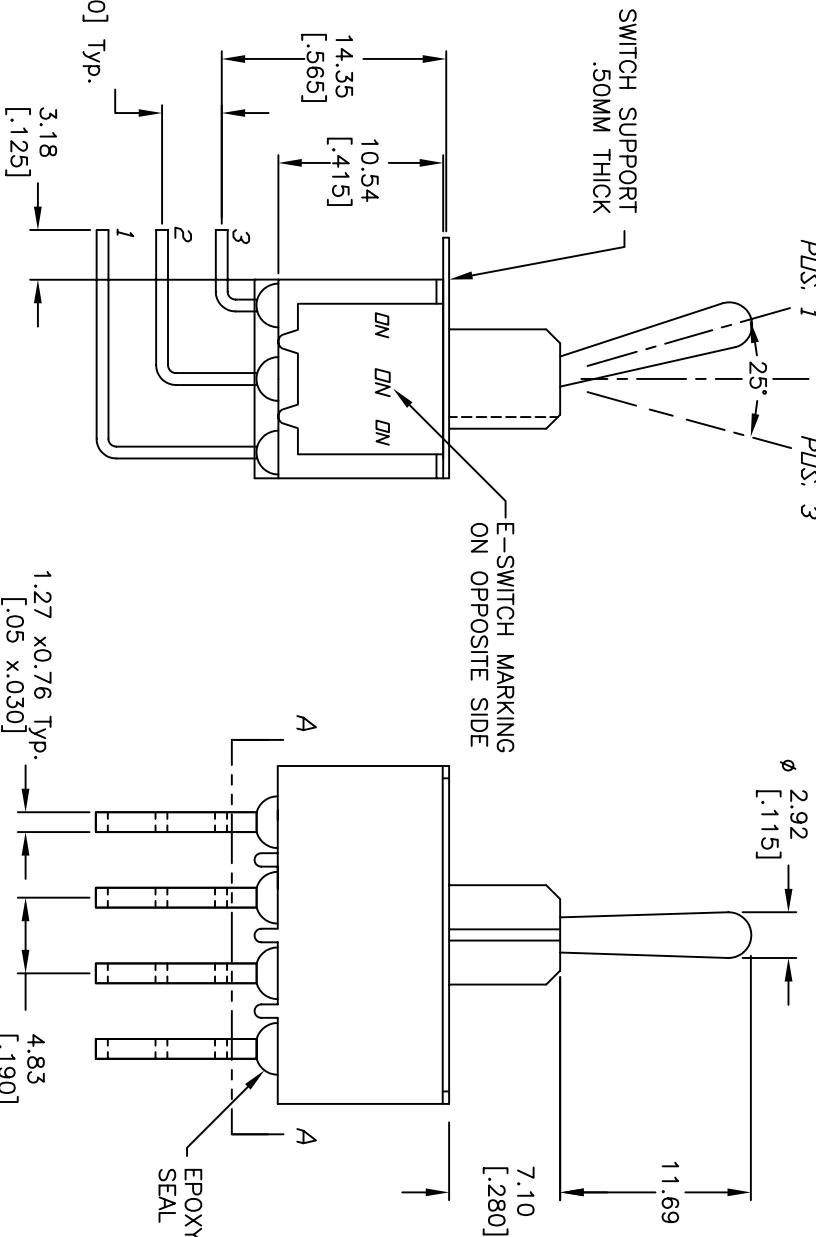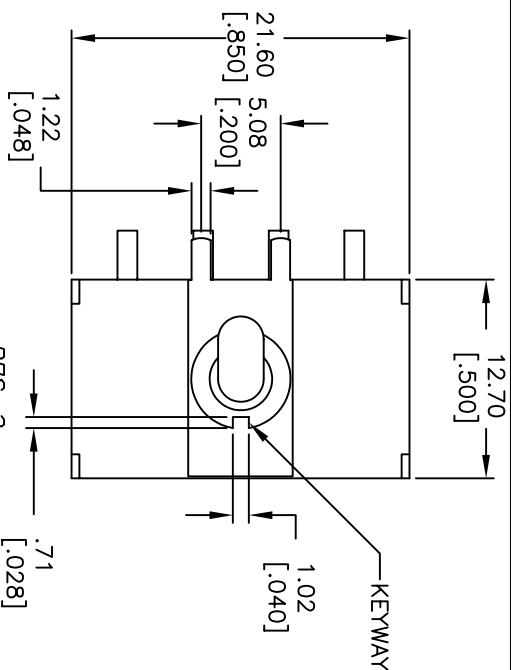

E-SWITCH®

F	15881	CORRECT TERMINAL NUMBERS	3/21/06	PH
E	15147	CHANGED DIM. & UPDATED LIFE	8/5/05	PV
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
100 4P6 T1 B4 M7 Q E				
SCALE	DATE	DR	DWG	REV
2:1	3/1/99	MM	T146007	F