


RECOMMENDED PCB LAYOUT




SPDT CIRCUIT
CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20VAC or DC
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE over
NICKEL PLATE.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

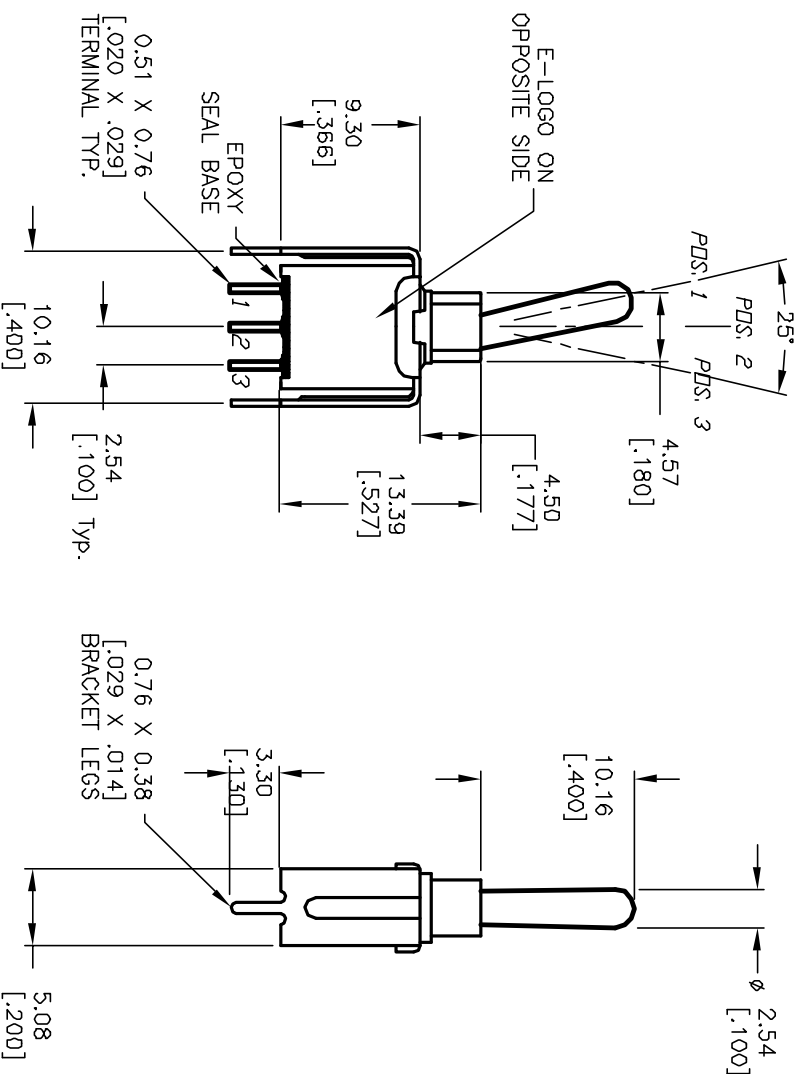

E-SWITCH®

REV.		ECN NO.		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED	
B		12052		REVISED AND REDRAWN	
B		12052		DESCRIPTION	
B		12052		DATE	
B		12052		CHKD	
B		12052		SCALE	
B		12052		DATE	
B		12052		DR	
B		12052		DWG	
B		12052		REV	