


VIEW A-A
BRACKET NOT SHOWN




CIRCUIT: 2PDT

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	OFF	DN	
2-3, 5-6	OPEN	2-1, 5-4	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 3A @120VAC or 28VDC: 1A @250VAC
5. FIXED TERM. & MOVING CONTACT: COPPER ALLOY W/SILVER PLATE.
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @seo level.
9. OPERATING TEMP.: -30°C to +85°C

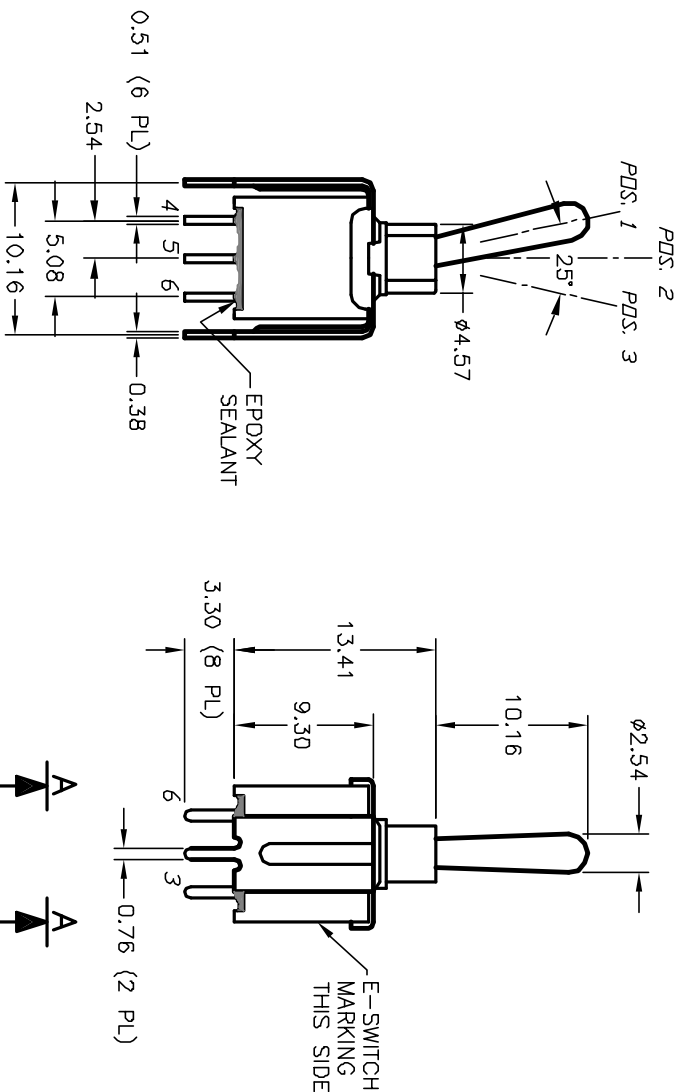

E-SWITCH®

TITLE			
A	12820	RELEASED FOR PRODUCTION	2/18/03
REV.	ECN NO.	DESCRIPTION	DATE
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED	CHKD
SCALE			
2:1			
DATE			
2/18/03			
DR			

DWG			
T2013228			
REV			
A			