


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	CN
2-3,5-6	DPEN	2-1,5-4



() = MOMENTARY




CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 3 AMPS @ 120VAC OR 28VDC;
1 AMP @ 250VAC
5. ELECTRICAL LIFE: 30,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. CONTACT RESISTANCE: 20mILl-Ohms max. Typical
Initial @2-4VDC
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.



BOTTOM VIEW

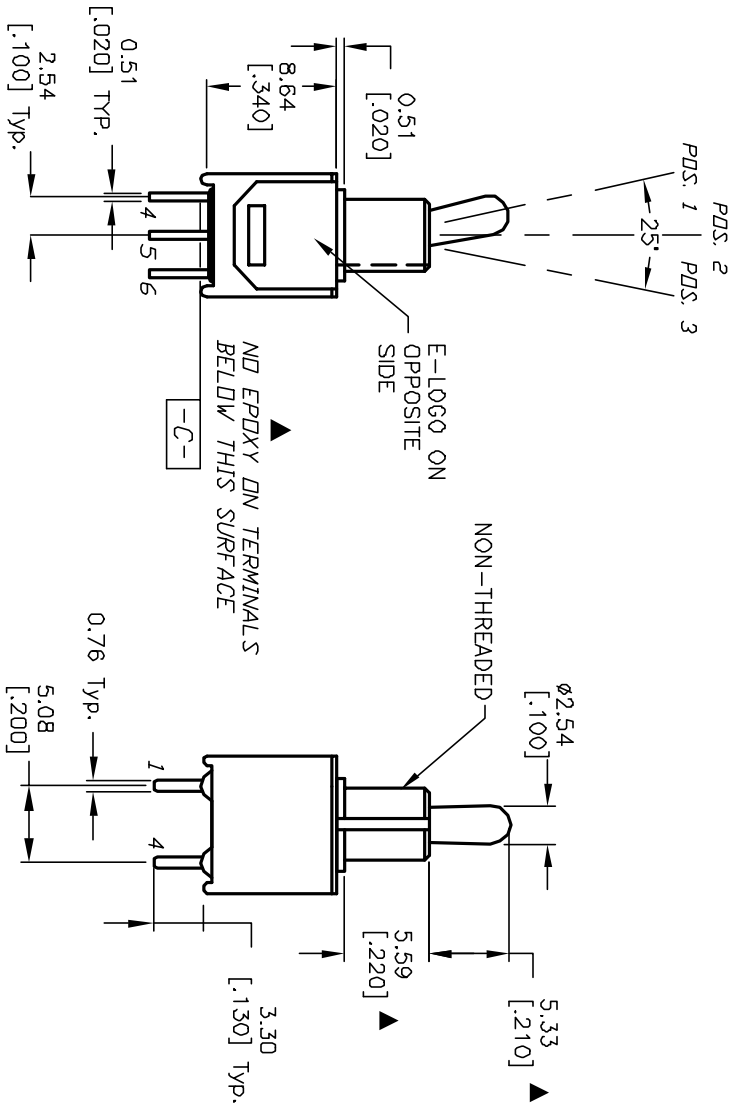

				E-SWITCH®			
				TITLE			
				200MDP212B4M2QE			
A	13152	RELEASED FOR PRODUCTION	5/23/03	AR			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							

SCALE		DATE	DR	DWG	REV
2:1		5/23/03	AR	T211089	A