
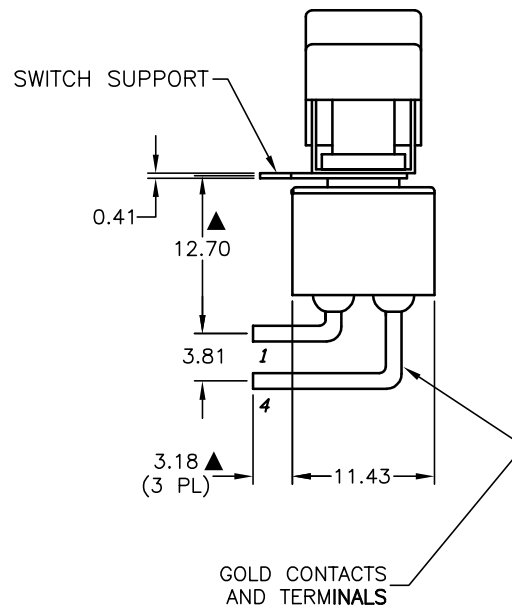
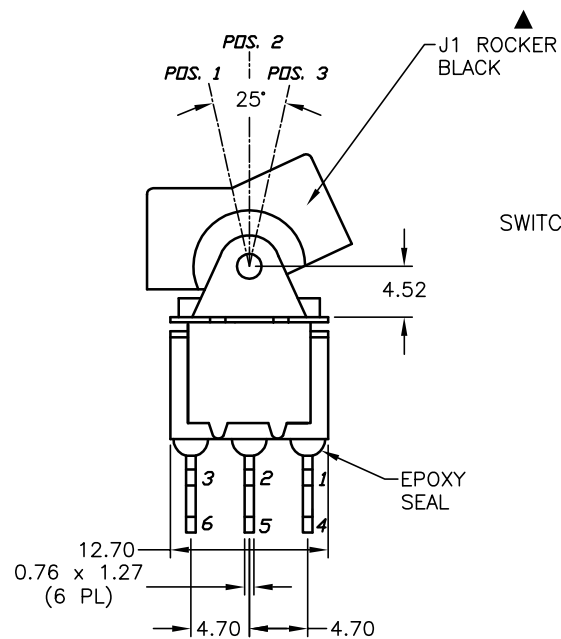
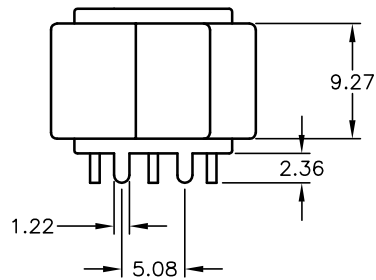


RECOMMENDED PCB HOLES



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

CONTACT CONFIGURATION

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: .4VA MAX. @ 20V(AC or DC) MAX.
- CONTACTS: GOLD FLASH OVER SILVER PLATED COPPER.
- ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE

300AWDP1J1BLKM6RE

SCALE

2:1

DATE

4/22/04

DR

AR

DWG

T301006

REV

A

A

13948

RELEASED FOR PRODUCTION

4/22/04

AR

REV.

ECN No.

DESCRIPTION

DATE

CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED