


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	NONE	DN
2-3	OPEN	2-1

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

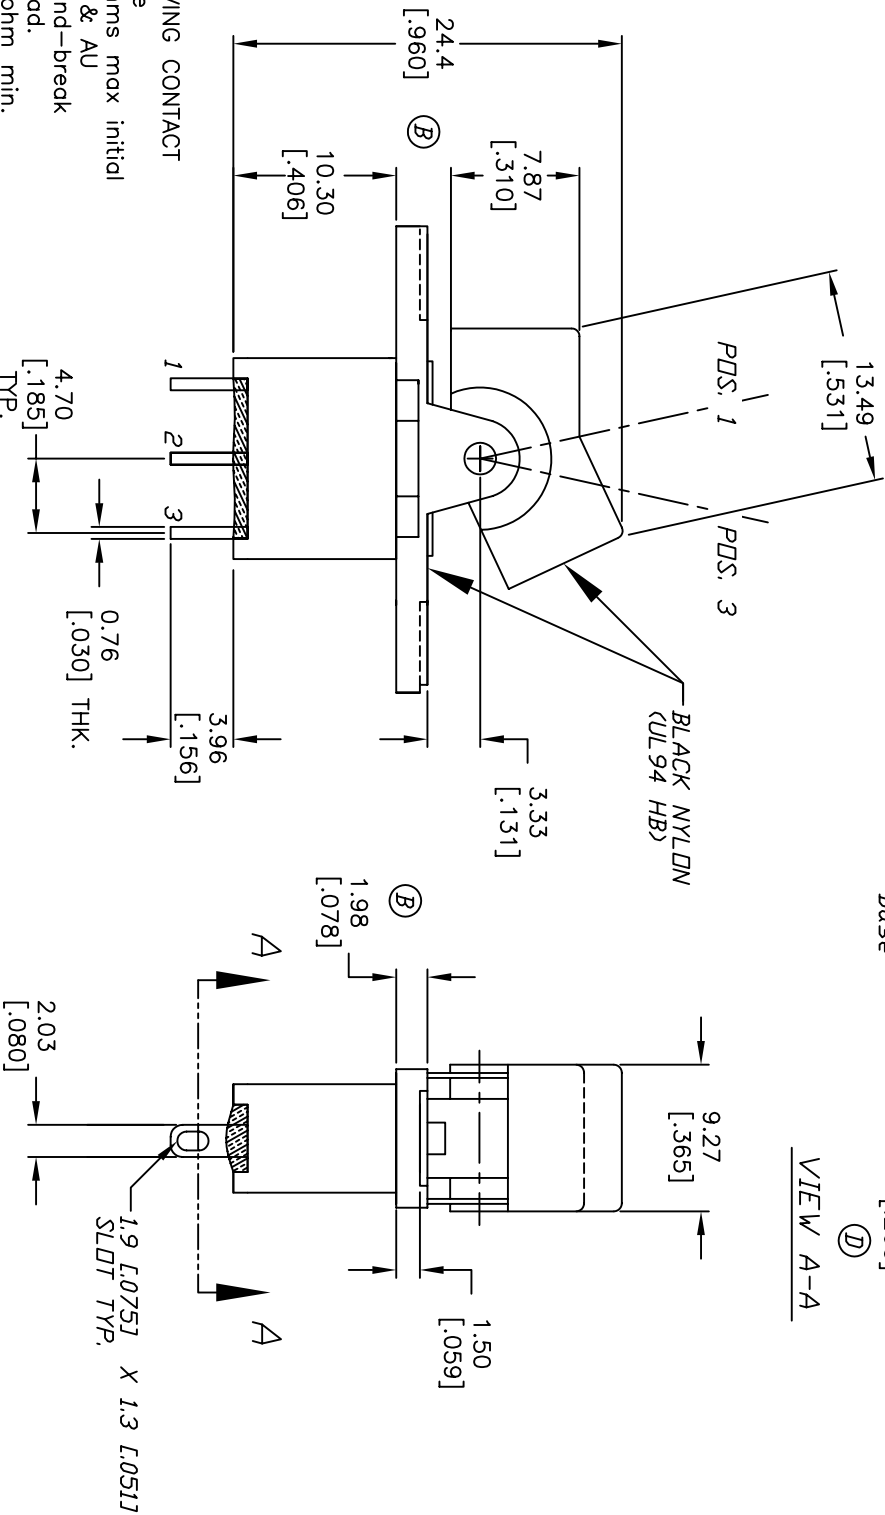

D	15235	DIM WAS 6.86	9/2/05	PH
C	12016	REVISED DIMENSION, ADD DIM.	3/26/02	CB
B	11604	REVISED/ADD NOTE 4-10	8/7/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

**THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED**

E-SWITCH®				
TITLE				
300A WSP-1 R1 BLK M1 Q E				
SCALE	DATE	DR	DWG	REV
2:1	8/7/01	CB	T301012	D

E-SWITCH®