

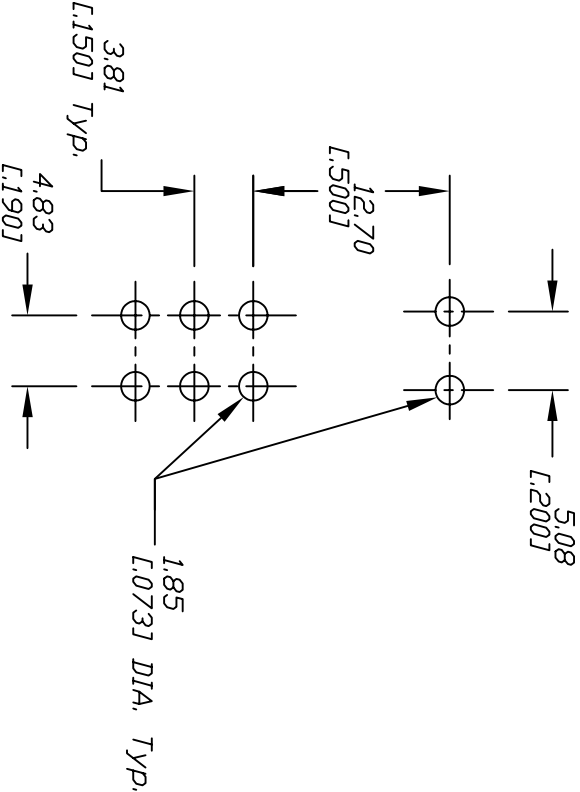
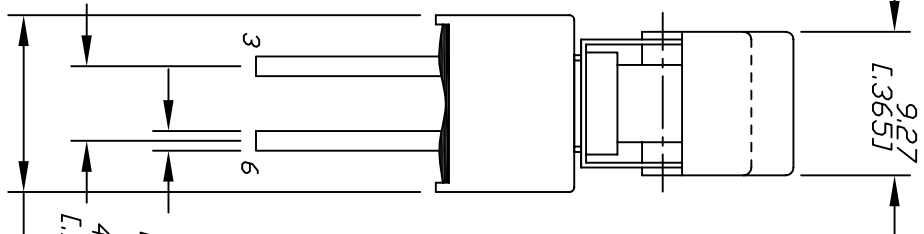
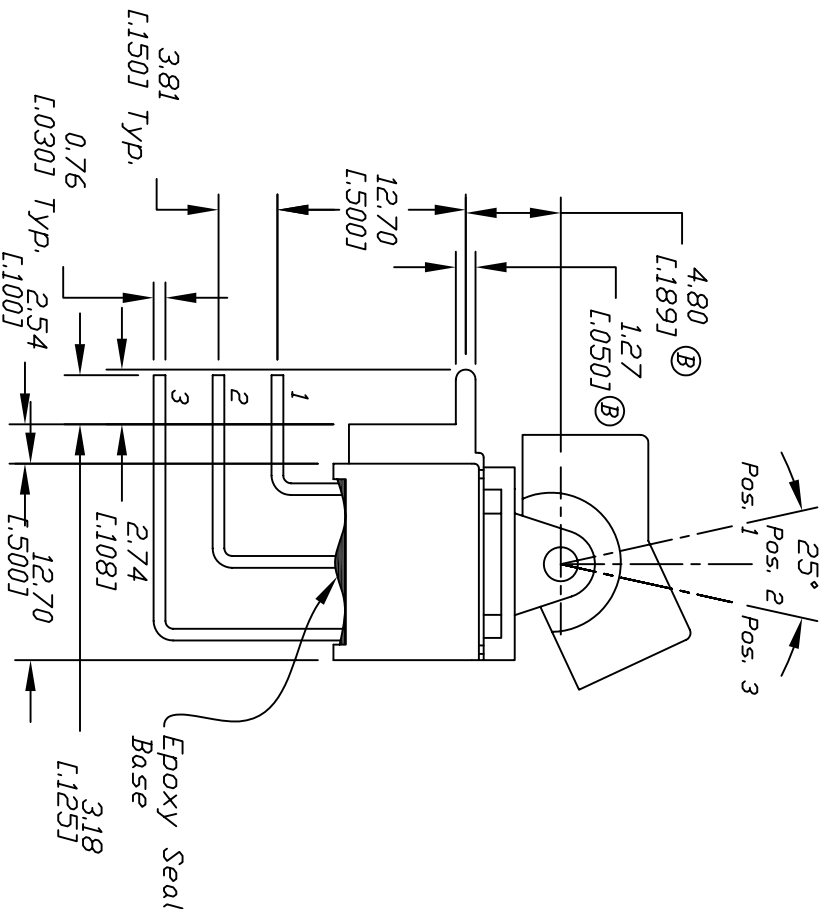


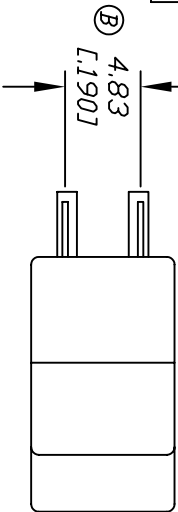

RECOMMEND P.C.B. LAYOUT



CIRCUIT: DPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3,5-6	OPEN	2-1,5-4	

- NOTES: B
1. ALL DIMENSIONS IN: MM (INCH)
 2. GENERAL TOLERANCE: XX±0.4, XXX±0.25
 3. TERMINAL NUMBERS FOR REFERENCE ONLY.
 4. PLATING MATERIAL: SILVER
 5. RATING: 5A @ 120VAC OR DC
2A @ 250VAC
 6. ELECTRICAL LIFE: 30,000 MAKE AND BREAK CYCLES.
 7. INSULATION RESISTANCE: 1,000MΩ MIN.
 8. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
 9. OPERATING TEMP: -30°C TO 85°C

C	15430	DIM FROM 356	10/21/05	PH
B	15371	UPDATED DRAWING CHANGED NOTED	10/14/05	PH
A		RELEASED FOR PRODUCTION		
REV.	REV.	DESCRIPTION	DATE	CHK

E-SWITCH				
TITLE				
300A WDP-1 J1 (B1K) M7 Q E				
SCALE	DATE	DR	DWG	REV
2:1	3/31/98	MM	T301020	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED