



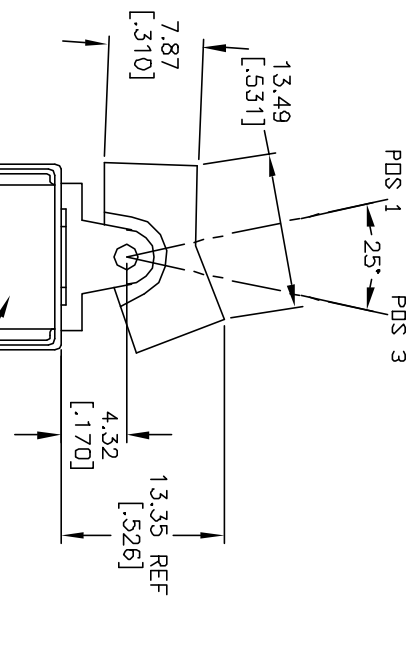


CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3, 5-6	OPEN	2-1, 5-4

1. ALL DIMENSIONS IN MM [INCH]

2. GENERAL TOLERANCE: $X, X = \pm 0.4$
 $X, XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 VA MAX. @ 20 VAC OR DC MAX
5. FIXED TERMINAL & MOVING CONTACT:
COPPER ALLOY W/ GOLD PLATE OVER NICKEL PLATE
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M Ω MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level.
9. OPERATING TEMP.: -30°C to 85°C

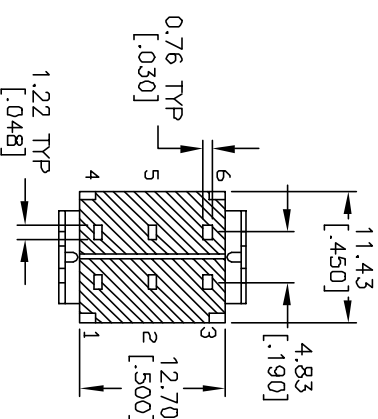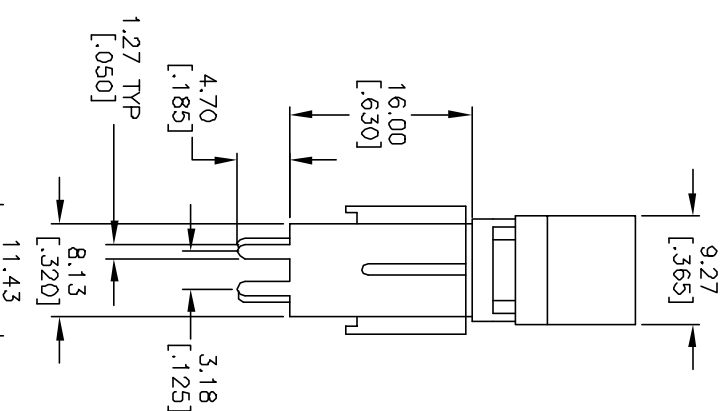

				TITLE			
				3004 WDP1 J1 VS3 R E			
A	11731	RELEASED FOR PRODUCTION	10/11/01	CJC			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE	DR	DWG	REV		
1.5:1		10/11/01	CJB	T301024	A		