



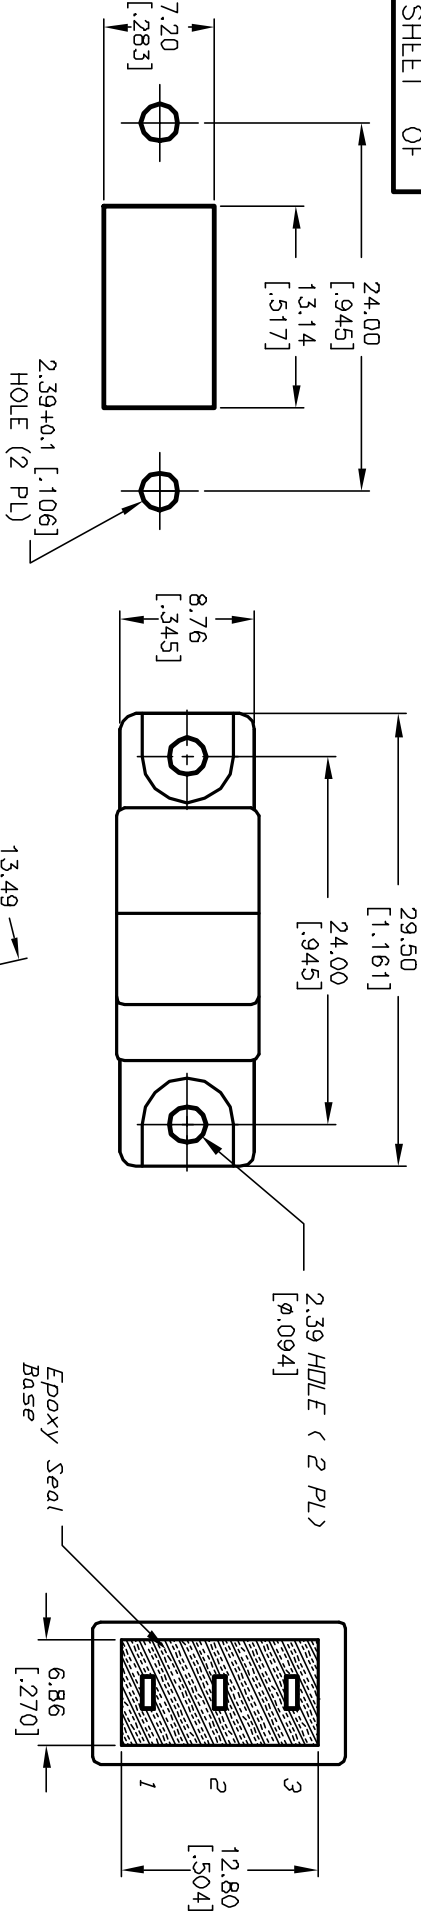

RECOMMENDED PANEL MOUNT



CIRCUIT: SPST

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	
DN	NONE	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V max. (AC or DC)
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Gold plate over Nickel plate
CONTACT RESISTANCE: 10mΩ Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

B	12016	REVISED DIMENSION, ADD DIM.	3/26/02	CB
A	11604	RELEASED FOR PRODUCTION	8/7/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
300A WSP-1 R1 BLK M1 R E				
SCALE				
2:1				
DATE				
8/7/01				
DR				
CB				
DWG				
T301025				
REV				
B				