



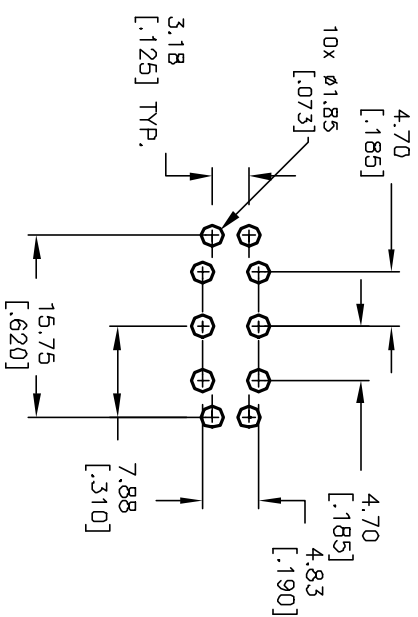


RECOMMENDED P.C.B. LAYOUT





CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
X.XX=±0.4
2. GENERAL TOLERANCE: X.X=±0.4
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120V AC or 28VDC;
2A @250V AC
5. FIXED TERMINAL & MOVING CONTACT:
Copper Alloy w/ Silver plating
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for Ag & Au
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ROCKER: STD BLACK (UL94HB)

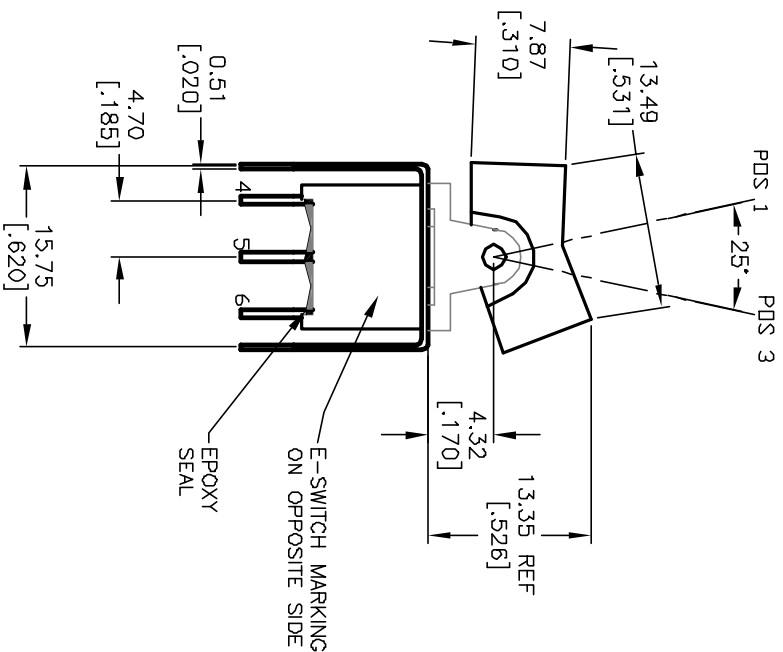

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	NONE	DN
2-3, 5-6	OPEN	2-1, 5-4

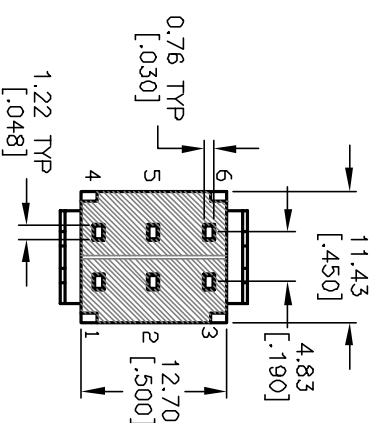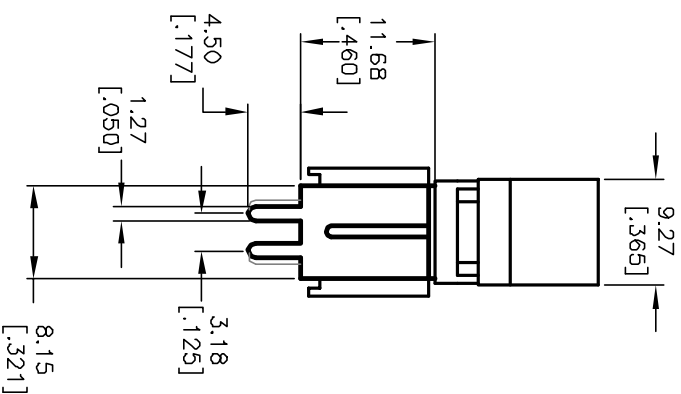

				TITLE			
				300A WDP1 J1 VS2 Q E			
A	12569	RELEASED FOR PRODUCTION	11/18/02	CB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE		DR	DWG	REV	
1.5:1		11/15/02		CJB	T301030	A	